

# Ordering Instructions

## STEP 1. Complete the QuickShip Part Number

Example of completed QuickShip Part Number: QSRM4D-1L35K-8-M-SA-L3EM-PA-3

Optics											
QSRM4D	1L35K	8		M	SA	L3	EM	PA	3		
Series	Color Temp	Length	Up	Down	Finish	LL/Driver	Circuitry	Mounting	Voltage	Controls	Options

## STEP 2. Row Configurations

**Part 1)** Enter quantity of runs under the QTY column


QTY	Nominal Length	Run Length Overall	Alone Length	Start Length	Mid Length(s)	End Length	STD = Standard w/EM = With Emergency	Diagram
4'	1225 [48.2]	4					STD w/EM	
8'	2442 [96.1]	8					STD w/EM	
12'	3661 [144.1]	12					STD w/EM	

Example: 5 8-ft Runs with Emergency


**Part 2)** Select one pod to indicate desired emergency lighting location

**LEGEND**


- Standard (STD) Wire Entry Location
- Emergency (EM) Lighting Location
- Emergency or Battery Wire Entry Location



**Selection examples in a RM2/RM4 28 ft run:**

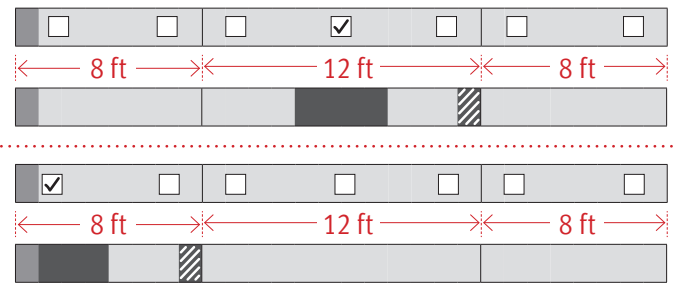

**Selection examples in a RMEP6/8 20 ft run:**

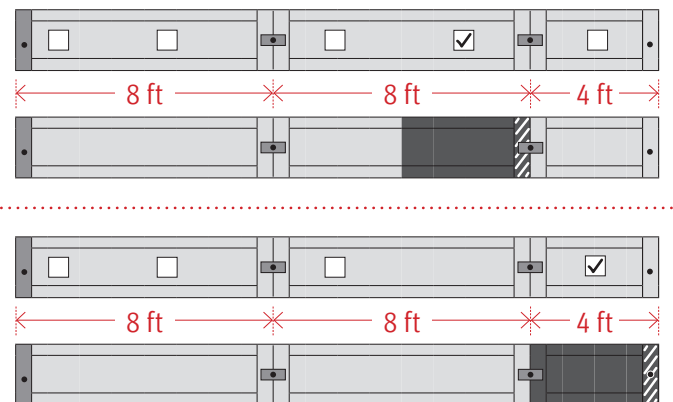

## STEP 3. Submit Forms

Send completed forms to the appropriate inside sales representative.



# Rail RM2DI

Direct / Indirect



Pendant

## Ordering Instructions - please refer to page 4 for detailed Ordering Instructions

**STEP 1. QuickShip Part Number**

**STEP 2. Row Configurations**

**STEP 3. Submit Forms**

### STEP 1. QuickShip PART NUMBER

Example Part Number: QSRM2DI-L35K-8-MMA-SA-L3EM-PA-1

Optics										
QSRM2DI	2L35K									
Series	Color Temp	Length	Up	Down	Finish	LL/Driver	Circuitry	Mounting	Voltage	Controls
<b>Color Temp</b>	<b>Optics Up</b>	<b>Light Level (LL) / Driver</b>				<b>Circuitry</b>			<b>Voltage</b>	
2L35K = 3500K	N = None - Open Top	0-10V Dimming (Standard)	Lumens Delivered	Wattage	Efficacy (LPW)	1 = 1 Circuit	1 = 120 V			
<b>Length</b>	M = Meta Ice	L1	3175	27	116	EM = Emergency/Night Light	2 = 277 V			
4 = 4 ft	<b>Optics Down</b>	L2	4046	35	116	B = Battery	3 = 347 V			
8 = 8 ft	M = Meta Ice	L3	5797	48	121	<b>Mounting</b>	4 = UNV (120-277V)			
12 = 12 ft	MA = Meta Ice w/ Asymmetric Reflector	L4	11113	95.5	116	PA = Pendant Aircraft Cable	<b>Controls</b>			
R = Continuous Rows (See p.18)	<b>Finish</b>	Based on 4ft sections.				PT = Pendant Aircraft Cable for T-Bar	_ = None (leave space empty)			
	SA = Satin Aluminum					Indicate cable length:	<b>Options</b>			
	W = White					See standard AC cable lengths on page 24	_ = None (leave space empty)			

# STEP 2. Row Configurations

Part 1) Indicate desired quantity of rows under the QTY column

Part 2)  ← Pods →  **Select one pod per row to indicate desired Emergency lighting location.** If a similar row requires a different Emergency lighting location, please fill out another form. Refer to page 4 for more ordering instructions information.

QTY	Nominal Length	Run Length Overall	Alone Length	Start Length	Mid Length(s)	End Length	STD = Standard w/EM = With Emergency	Asymmetric Reflector Light Throw Direction	
—	4'	1269 [50.0]	4				STD	↑	1257 [49.5]
							w/EM	↑	
—	8'	2486 [97.9]	8				STD	↑	2474 [97.4]
							w/EM	↑	
—	12'	3703 [145.8]	12				STD	↑	3691 [145.3]
							w/EM	↑	
—	16'	4924 [193.9]	8	8			STD	↑	2452 [96.5]      2460 [96.9]
							w/EM	↑	
—	20'	6141 [241.8]	12	8			STD	↑	3669 [144.5]      2460 [96.9]
							w/EM	↑	
—	24'	7358 [289.7]	12	12			STD	↑	3669 [144.5]      3677 [144.8]
							w/EM	↑	
—	28'	8578 [337.7]	8	12	8		STD	↑	2452 [96.5]      3654 [143.9]      2460 [96.9]
							w/EM	↑	
—	32'	9796 [385.7]	12	8	12		STD	↑	3669 [144.5]      2438 [96.0]      3677 [144.8]
							w/EM	↑	
—	36'	11012 [433.5]	12	12	12		STD	↑	3669 [144.5]      3654 [143.9]      3677 [144.8]
							w/EM	↑	
—	40'	12233 [481.6]	12	8	12		STD	↑	3669 [144.5]      2438 [96.0]      2438 [96.0]      3677 [144.8]
							w/EM	↑	
—	44'	13450 [529.5]	12	12	12		STD	↑	3669 [144.5]      3654 [143.9]      2438 [96.0]      3677 [144.8]
							w/EM	↑	
—	48'	14666 [577.4]	12	12	12		STD	↑	3669 [144.5]      3654 [143.9]      3654 [143.9]      3677 [144.8]
							w/EM	↑	

### LEGEND

- Standard (STD) Wire Entry Location (located 15mm from end on top of fixture)
- Emergency (EM) Lighting Location
- EM or Battery Wire Entry Location (located 15mm from end on top of fixture)

Mounting Points

A = Distance Between Mounting Points

EM or battery wire entry location if pod 2, 3 or 4 is selected:

EM or battery wire entry location if pod 2 or 3 is selected:

Refer to page 24 for additional Aircraft Cable information