
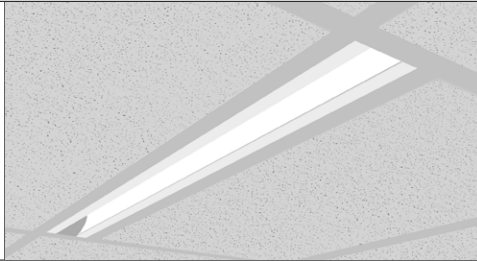


DR25

LED . Recessed

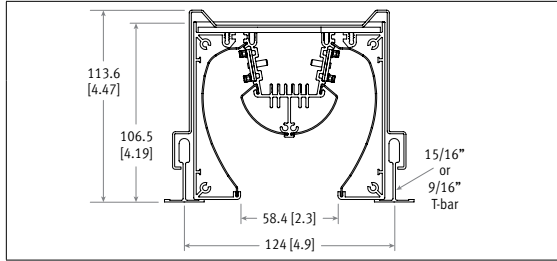

CAT #:
PREP BY:
DATE:
PROJECT:
TYPE:
NOTES:

ORDERING LOGIC

Sample part number: DR25-2L35K-4-N-N-SA-L3-1-T-1-N

DR25			Optics				1	T		N										
Model	Color Temp	Length	Up	Down	Finish	LL/Driver	Circuitry	Mounting	Voltage	Controls										
	2L30K = 3000K	2 = 2 ft	N = None	B = Black	Fixture Lumens Light level measured at 3500K. Add 3% lumen output for 4000K or subtract 2% lumen output for 3000K.	<table border="1"> <tr> <th>0-10V Dimming (Standard)</th> <th>3500k</th> </tr> <tr> <td>L1 =</td> <td>2424</td> </tr> <tr> <td>L2 =</td> <td>3086</td> </tr> <tr> <td>L3 =</td> <td>4434</td> </tr> <tr> <td>L4 =</td> <td>8480</td> </tr> </table>	0-10V Dimming (Standard)	3500k	L1 =	2424	L2 =	3086	L3 =	4434	L4 =	8480	1 = 1 Circuit	1 = 120 V	Mounting T = Recessed T-Bar	2 = 277 V
0-10V Dimming (Standard)	3500k																			
L1 =	2424																			
L2 =	3086																			
L3 =	4434																			
L4 =	8480																			
	2L35K = 3500K	4 = 4 ft	Optics Down	SA = Satin Aluminum	3 = 347 V	4 = UNV (120 - 277 V)														
	2L40K = 4000K	8 = 8 ft	N = None	W = White	Controls N = None															
		R = Continuous Rows		C = Custom Finish Specify RAL#:	Based on 4ft sections. * All drivers remote mounted.															

SPECIFICATIONS

Due to the Continuous Improvement Policy at Metalumen, we reserve the right to change our specifications without notice.

Housing: Rigid 3-piece extruded aluminum body with 22-gauge steel top cover plate.

End Caps: Steel powder coated.

Optical System: MetalLED mid-flux LED technology transmits to internal smooth, high performance reflectors. Open luminaire, no lens design.

CRI: 83+ (3500K) (80 minimum for all CCT)

Lumen Maintenance: At an ambient

operating temperature of 25°C our LED system output remains useful at L85 > 60 000hrs.

Finish: Black, satin aluminum, or white powder coated paint finish. For custom finish, contact factory.

Mounting: Fits both 9/16" and 15/16" T-Bar. Mounting brackets provided.

Drivers: Metalumen offers dimming drivers

as a standard on our entire LED product offering at 0-10V. Dimming range is down to 1%. Power factor @ full load is >90% with a Class 2 rating. All drivers remote mounted.

Controls: Not available.

Options: Consult factory for Lutron driver options:

- L3DAE Hi-lume 1% EcoSystem LED Driver
- L3DA3W Hi-lume 1% 3-wire LED Driver

- LTEA2W Hi-lume 1% 2-wire LED Driver
 - LDE1 Hi-lume 1% -H EcoSystem LED Driver
 - LDE5 5-Series EcoSystem LED Driver
- Approvals:** Certified to NRTL safety and IES Recommendation testing standards. All components are UL/CSA/QPS recognized or listed. RoHS, LM79, LM80 and LM82 compliant.
- Environment:** Suitable for dry locations.

WARRANTY

Metalumen will warrant defective luminaires for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specification. If defective, Metalumen will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Metalumen.

LUMINAIRE WATTAGE AND OUTPUT SPECIFICATION

Light Level	Wattage	Lumens Delivered	Efficacy (LPW)	Lumen Adjustment Factor		
				Color Temp	80 CRI	90 CRI
L1	27.784	2424	87	3000K	0.984	0.873
L2	35.416	3086	87	3500K	1.000	0.875
L3	48.576	4434	91	4000K	1.032	0.879
L4	97.244	8480	87			

APPROVALS

Signature _____

Date _____

FILE NAME: DR25_LED_T_SPEC_SHEET

20170307

570 Southgate Drive, Guelph, Ontario N1G 4P6
Mailing Address: P.O. Box 1779 Guelph, Ontario, N1H 6Z9

1.800.621.6785 | T 519.822.4381 | F 519.822.4589
www.metalumen.com

Metalumen

FEATURES



COMMERCIAL // Commercial Lighting
 - With over 30 years of successful architectural lighting, providing unique concept and installation solutions has become second nature. Metalumen's Start to End Development Process results in unique performance, design and architectural requirements from concept through implementation. Metalumen's Lighting Solutions have been applied to customer

projects requiring: high profile architectural installations; improved energy efficiency; retrofit installations; unique installations. Metalumen can provide top-quality innovative fixtures when and where they are needed and, at the same time, allow the customer to determine their level of involvement in Metalumen's Start to End Development Process.



Edulumen is a collection of premium luminaires that maximize both the functionality and performance of any educational facility. Based on maximum efficiency, integration of controls and exceptional design, Edulumen will earn high marks for meeting your requirements. Students challenge themselves throughout the day to achieve, and Metalumen is dedicated to this by creating sustainable

environments that foster enhanced educational experiences

M E T A LED boards with a raw efficacy of over 120lm/W, proprietary to Metalumen. A slim LED platform for any of your LED linear application.

PHOTOMETRIC DATA - 3500K

L3


File Name: DR25-2L35K-4-L3
Luminaire Lumens: 4434
Total Watts: 48.576
Efficacy: 91 lms/W
Optics Up: None
Optics Down: None

COEFFICIENTS OF UTILIZATION

Zonal Cavity Method
 Effective Floor Cavity Reflectance = .20

RC	80				70				50			
	70	50	30	10	70	50	30	10	50	30	10	
RCR												
0	119	119	119	119	116	116	116	116	111	111	111	
1	108	103	98	94	105	101	97	93	96	93	90	
2	98	89	82	75	95	87	80	75	83	78	73	
3	88	77	68	62	86	75	67	61	72	66	60	
4	80	68	58	51	78	66	58	51	64	56	50	
5	73	60	50	43	71	59	50	43	56	49	43	
6	67	53	44	37	65	52	43	37	50	43	37	
7	62	48	39	32	60	47	38	32	46	38	32	
8	58	43	34	28	56	43	34	28	41	34	28	
9	54	40	31	25	52	39	31	25	38	30	25	
10	50	36	28	23	49	36	28	22	35	27	22	

PHOTOMETRIC CURVE



LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angle		
	0	45	90
45	7153	7180	7026
55	7210	6620	4855
65	7460	4464	3062
75	7246	2305	1589
85	4284	565	404

CANDLE DISTRIBUTION

Vertical Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	927.81	927.81	927.81	927.81	927.81
5	895.97	942.32	991.84	989.54	977.07
10	937.74	948.48	1029.55	1041.02	1065.62
15	915.62	972.98	1104.73	1150.86	1206.87
20	862.94	987.01	1159.59	1272.5	1299.68
25	883.05	1004.83	1232.67	1353.09	1379.29
30	843.67	1024.11	1251.78	1368.98	1396.24
35	818.06	1037.58	1272.68	1371.19	1402.28
40	787.56	1029.09	1245.65	1337.96	1385.36
45	759.27	1011.36	1204.14	1287.87	1321.85
50	689.79	963.46	1150.47	1178.39	1141.26
55	642.37	909.44	1061.95	945.1	893.69
60	596.36	850.31	891.85	725.44	693.44
65	517.32	755.9	661.79	541.63	534.21
70	437.93	614.83	466.89	402.24	379.45
75	344.12	419.44	303.27	263.25	253.52
80	234.13	232.55	173.19	159.67	149.42
85	103.62	86.06	62.72	56.64	56.47
90	16.87	11.02	7.31	5.27	5.69