
SPECIFICATION SHEET

RAIL 4 RM4D



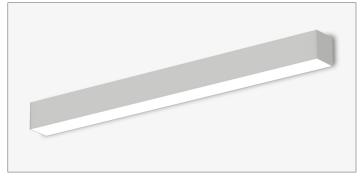

PART #:	
PREP BY:	DATE:
PROJECT:	
NOTES:	
APPROVAL SIGNATURE:	DATE (DD/MM/YYYY):

PERFORMANCE SUMMARY @ 400	ОК	Meta Blanc (MB)	Drop Lens (MD)		
		L3	L3		
Lumens per foot	80 CRI	547	577		
	90 CRI	481	507		
Wattage per foot		6.2			
	80 CRI	88	93		
Efficacy	90 CRI	77	81		
L70 Estimate (h)		>60,000 hrs			

See page 2 for the complete Light Level Performance chart.

FEATURES

- Independant control of intensity and correlated color temperature (CCT)
- Allows for scheduled mimicking of daylight color temperatures
- Dim-to-Warm simulates warmer CCT shift as luminaire dims (i.e. like traditional incandescent and halogen lights).

RM4D			4	5 6	7	W 8	9		TUN-12-MB-W-L31-W-1-D-
1. SERIES RM4D	2. COLOR TEMP 1LTUN Tunable Whit (2700 - 6500) 1LDW Dim to Warm (3500 - 2700) 90 CRI is available under OPTIONS	() * ()	Replace "/	OUS ROWS \" with length in feet selected ir us Rows section	4. OPTICS MB Meta B MD Drop L Meta Blanc, Dro diffuse lens the	ens	5. FINISH SA Satin Alumir W White B Black C Custom Fini Specify RAL:		6. LIGHT LEVEL / DRIVER L1 L2 L3 L4 Select Driver below. See Light Level Performance chart below.
			UNTING Wall	9. VOLTAGE 1 120 V 2 277 V 4 UNV (120 - 277 V)	D Daylig O Occup	/ SENSORS (leave space e ht Sensor** bancy Sensor** ht and O ccupat		90	PTIONS 90 CRI, High R9 None (leave space empty)

PLEASE NOTE Dim to Warm is not available with integrated sensors.

L Tunable White and Dim to Warm are availabe with emergency battery packs connected to the cool color LEDs only.

* Consult factory for alternate options. | ** Controls intensity only (not CCT). | ¹ Each EM pod, by default, has separate wire entry for DIM and CCT control. | ²Battery operates 4ft sections only.

Select Driver:

- Factory option dual 0-10V (Dim & CCT), 1% Dimming
- Lutron T Series EcoSystem, 1% Dimming
- DALI Factory Option, DT6 Dual Address, 1% Dimming
- DALI Factory Option, DT8 Single Address Color Control, 1% Dimming
- DALI EldoLED

Light Level Performance at 4000K

Meta Blanc (MB)		2700K				4000K				6500K			
Meta Blanc (MB)		L1	L2	L3	L4	L1	L2	L3	L4	L1	L2	L3	L4
Total Lumens / foot (lm)	80 CRI	297	374	502	694	323	407	547	789	327	411	551	779
0% Up / 100% Down	90 CRI	261	329	441	610	284	358	481	693	287	361	484	685
Wattage per foot		3.9	4.8	6.5	9.7	3.8	4.7	6.2	9.1	3.9	4.9	6.6	10.1
Efficacy (Im (M))	80 CRI	77	78	77	72	84	87	88	86	83	84	83	77
Efficacy (lm/W)	90 CRI	67	68	68	63	74	76	77	76	73	74	73	68
Color Developing (CDI) 80 CRI		80+											
Color Rendering (CRI)	90+												
L70 Estimate @ 25°C Ambie	ent						> 60,0	00 hrs					

Drop Long (MD)			270	00K		4000K				6500K			
Drop Lens (MD)		L1	L2	L3	L4	L1	L2	L3	L4	L1	L2	L3	L4
Total Lumens / foot (lm)	80 CRI	314	395	527	731	341	429	577	830	346	434	578	813
8% Up / 92% Down	90 CRI	276	347	463	643	300	377	507	729	304	381	508	715
Wattage per foot		3.9	4.8	6.5	9.7	3.8	4.7	6.2	9.1	3.9	4.9	6.6	10.1
Efficacy (Im (M))	80 CRI	81	82	81	76	89	92	93	91	88	89	87	81
Efficacy (lm/W)	90 CRI	71	72	71	66	78	81	81	80	77	78	77	71
Color Rendering (CRI) 80 CRI 90 CRI		80+											
		90+											
L70 Estimate @ 25°C Ambie	nt						> 60,0	00 hrs					

Metalumen's light level performance metrics are subject to manufacturers component tolerances.

WIRING



Luminaire with Integral Driver								
Line Voltage / Control to Luminaire								
Hard Wire	Power Cord							
(7) Leads WHITE - NEUTRAL BARE - GROUND VIOLET - DIM (+) GREY - DIM (-) VIOLET - CCT MIX (+) GREY - CCT MIX (-)	(18-6) WHITE - NEUTRAL GREEN - GROUND Not available with fixture integrated occupancy or RED - CCT MIX (+) VIOLET - DIM (+) VIOLET - DIM (+) GREY - DIM (-) / CCT MIX (-)							

	Luminaire with R	emote Driver (BB Box)				
	Line Voltage / Contro	l to Remote Driver (BB Box)				
	Hard Wire	Power Cord				
(7) Leads	BLACK - LINE WHITE - NEUTRAL BARE - GROUND VIOLET - DIM (+) GREY - DIM (-) VIOLET - CCT MIX (+) GREY - CCT MIX (-)	(18-6)	BLACK - LINE WHITE - NEUTRAL GREEN - GROUND RED - CCT MIX (+) VIOLET - DIM (+) GREY - DIM (-) / CCT MIX (-)			
	Remote Driver (BB Box) to Luminaire				
	Hard Wire	Core	d			
Remote Driver	RED - LED1 + BLUE - LED1 - RED - LED2 + BLUE - LED2 - BARE - GROUND	(18-5)	BLACK - LED1 - WHITE - LED1 + GREEN - GROUND VIOLET - LED2 + GREY - LED2 -			


Metalumen

CONTINUOUS ROWS


Step 1) Indicate desired quantity of rows under the QTY column

Step 2) If applicable, select pod(s) per row to indicate desired Emergency lighting location. If a similar row requires a different Emergency lighting location, please fill out another sheet.

Record drawings for rows not represented here will be sent out upon order.

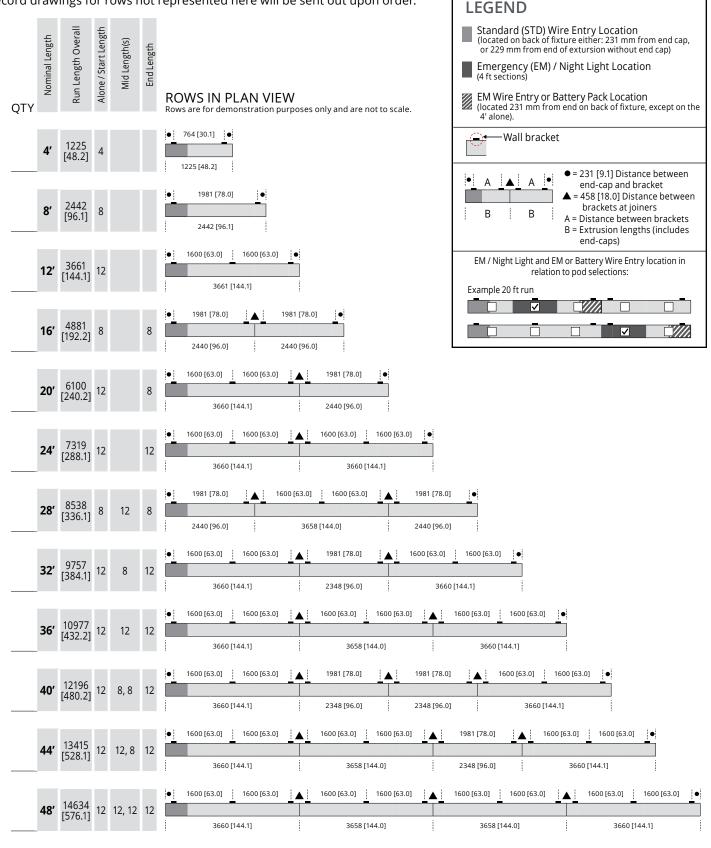

CROSS SECTIONS

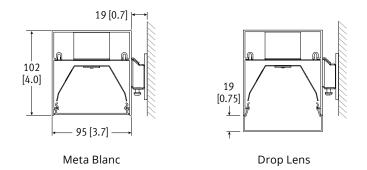

SPECIFICATIONS

Due to the Continuous Improvement Policy at Metalumen, we reserve the right to change our specifications without notice.

Housing: Rigid extruded aluminum body, 2.0mm (0.08") nominal wall thickness. Aluminum end caps. Optical System: Metalumen luminaires are designed to utilize leading edge LED technology combined with luminaire optimized reflectors and our custom diffusers, resulting in industry leading optical performance. **CRI:** 80+ for all color temperature

ranges. Lumen Maintenance: Minimum 50,000h with TM-21 lumen maintenance of 85% @ 25°C ambient temperature (calculated based on IESNA LM-80-08 LED test data). L70: >60,000hrs. Finish: Satin aluminum and white are standard finishes. For custom finish, contact factory. Weight: 1.3 kg/300 mm [2.9 lb/ft] Mounting: Mounting plate provided. Electrical: Factory prewired with easy wire quick connect sections. Drivers: Metalumen offers 0-10V dimming as a standard on our entire LED product offering. Dimming range is 1%-100%. Power factor is > 90%. Class 2 rating. Approvals: Certified to NRTL and IES testing standards. This product is cULus listed. RoHS compliant. Environment: Suitable for dry or damp locations.

WARRANTY

Metalumen will warrant defective luminaires for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specification. If defective, Metalumen will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Metalumen.