


# RAIL FAMILY

Our RAIL family brings a synergy to any design layout, enhancing architectural detail and creating complementary spatial patterns.

The sleek profiles will make a statement in any open space or create interest in your conference rooms, private offices or reception areas.

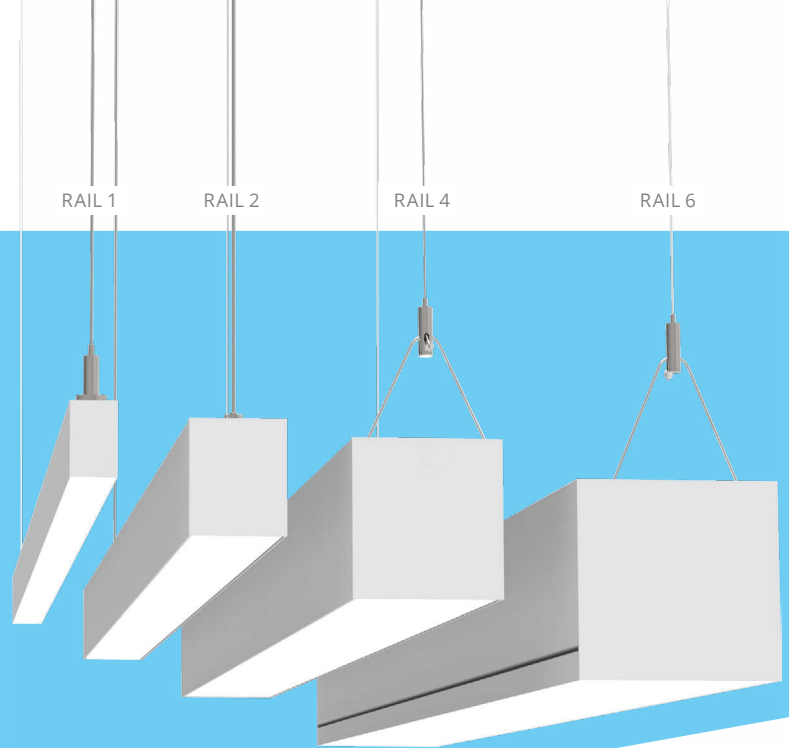

Drop Lens



Corners



Patterns

## Features\*:

- 3000K, 3500K, 4000K
- Tunable White (2700 - 6500K) and Dim-to-Warm (3500-2700K)
- Fully illuminated 90° corners
- 3/4" drop lens with seamless lines of light without pixels or shadows
- Standard lengths offered from 2' to 12' in 1' increments, as well as continuous rows
- Option for daylight harvesting, occupancy and dimming control

## Benefits\*:

- Sleek, attractive and versatile design aesthetic
- Suitable for dry, damp and wet/outdoor locations
- UL Listed & DLC approved

\* The listed may not be offered/applicable across the entire Rail family. Please refer to individual spec sheets for latest options and approvals.

# RAIL FAMILY OPTIONS MATRIX

		RAIL 1	RAIL 2		RAIL 4			RAIL 6	
		RML	RM2D	RM2DI	RM4D	RM4DI	RM4DOD Outdoor	RP4D Perimeter	S6
		Direct	Direct	Direct/Indirect	Direct	Direct/Indirect	Direct	Direct	Direct
<b>COLOR TEMP</b>	3000K	•	•	•	•	•	•	•	•
	3500K	•	•	•	•	•	•	•	•
	4000K	•	•	•	•	•	•	•	•
	Tunable White (2700K - 6500K)		•	•	•	•			•
	Dim-to-Warm		•	•	•	•			•
<b>LENGTH</b>	2 ft	•	•	•	•	•	•		•
	3 ft	•	•	•	•	•			•
	4 ft	•	•	•	•	•	•		•
	5 ft	•	•	•	•	•	•		•
	6 ft	•	•	•	•	•	•		•
	7 ft	•	•	•	•	•	•		•
	8 ft	•	•	•	•	•	•		•
	9 ft	•	•	•	•	•	•		•
	10 ft	•	•	•	•	•	•		•
	11 ft	•	•	•	•	•	•		•
	12 ft	•	•	•	•	•	•		•
	Custom Length**	•	•	•	•	•	•		•
	Continuous Rows**	•	•	•	•	•	•		•
	XX = Length in ft (min. length of 2ft)								•
<b>PATTERN</b> Patterns are not available for wall applications	Square / Rectangle	•	•	•	•	•	•	•	•
	U-Shape	•	•	•	•	•	•	•	•
	L-Shape	•	•	•	•	•	•	•	•
	T-Shape (Custom Pattern)**	•	•	•	•	•	•	•	•
	Cross / X (Custom Pattern)**	•	•	•	•	•	•	•	•
	Wall-to-Ceiling Indoor (Custom Pattern)**	D, DF, S	D, DF, S		D, DF, S				D, S
	Hexagon 2ft (Pendant mount only)		•						
	Hexagon 3ft (Pendant mount only)		•						
<b>OPTICS</b>	<b>DIRECT</b>	Meta Blanc		•	•		•	•	•
		Meta Cloud	•						
		Meta Ice		•		•		•	•
		Meta Ice w/ Asymmetric Reflector		•					
		Drop Lens (not available with patterns)	x T,D	x T,D		x T,D			x T,D
	<b>DIRECT / INDIRECT</b>	Meta Blanc w/ Asymmetric Reflector			•		•		•
		UP: Meta Blanc / DOWN: Meta Blanc			•		•		•
		UP: Meta Blanc / DOWN: Drop Lens			x Patterns		x Patterns		•
		UP: Rise Lens / DOWN: Drop Lens			x Patterns		x Patterns		•
		UP: Meta Ice / DOWN: Meta Ice			•		•		•
UP: Meta Ice / DOWN: Meta Ice w/ Asymmetric Reflector			•		•		•		
<b>FINISH</b>	Satin Aluminum	•	•	•	•	•	•	•	
	White	•	•	•	•	•	•	•	
	Black	•	•	•	•	•	•	•	
	Custom Finish (Specify RAL#)	•	•	•	•	•	•	•	
<b>LIGHT LEVEL / DRIVER**</b>	L1, L2, L3, L4 (See performance charts on spec sheets)	•	•	•	•	•	•	•	
<b>CIRCUITRY</b>	1 Circuit	•	•	•	•	•	•	•	
	Up / Down Switching		•	•	•	•	•	•	
	Emergency / Night Light		•	•	•	•	•	•	
	Emergency Battery Pack	•	•	•	•	•	•	•	
<b>MOUNTING</b>	Pendant Aircraft Cable	•	•	•	•	•		•	
	Pendant Aircraft Cable for T-bar	•	•	•	•	•		•	
	Solid Stem						•		
	Recessed						•		
	Recessed T-Bar (Tech-Zone)							•	
	Recessed T-Bar (Flush)	•	•		•			•	
	Recessed T-Bar Regressed 3"							•	
	Recessed Drywall Flangeless	•	•		•			•	
	Recessed Drywall (Flush)	•	•		•			•	
	Recessed Drywall Regressed 3"							•	
	Drywall Spackle Flange							•	
	Drywall Spackle Flange Regressed 3"							•	
	Surface	•	•		•		•	•	
	Wall		•	•	•	•	•	•	
Wall Vertical						•			
<b>VOLTAGE</b>	120V	•	•	•	•	•	•	•	
	277V	•	•	•	•	•	•	•	
	347V	•	•	•	•	•	•	•	
	UNV (120-277V)	•	•	•	•	•	•	•	
<b>CONTROLS</b>	Daylight Sensor		•	•	•	•		•	
	Occupancy Sensor		•	•	•	•		•	
	Daylight & Occupancy Sensors		•	•	•	•		•	
	Controls not available	•					•	•	
<b>OPTIONS</b>	90 CRI	•	•	•	•	•	•	•	
	Surge Protection					•			
	End Feed (alone fixtures only)						x R, WV		
	Standard Lengths Only (No telescopic sections)							•	
	Plenum - CCEA approved				•		•	•	

\*\* Consult factory.

Option is not available

Option is available

**D, DF, S** Wall-to-ceiling is only available for Drywall Flanged (D), Drywall Flangeless (DF) and Surface (S) mount

**x T,D** Drop Lens is not available for T-Bar (T) or Drywall Flanged (D) mount

**x Patterns** Drop Lens is not available with Patterns

**x R, WV** End feed not available for Recessed (R) or Wall Vertical (WV) mount

For more information about our products, please visit [www.metalumen.com](http://www.metalumen.com).

Metalumen reserves the right to change specifications for product improvement without notice.

20190610 RV02