

IS-0243-03 rev.01

**GRANDE WALL MOUNT LED
INSTALLATION INSTRUCTIONS**

NOTE

The following instructions provide general guidelines for product installation. For additional information consult the applicable electrical codes or contact factory directly for support before attempting anything with uncertainty.

CAUTION

Do not assemble fixture runs on floor.



WARNING

Risk of fire and electrical shock. **DISCONNECT POWER AT ELECTRICAL PANEL** before installing or servicing this product.

General Safety Instructions

- Read all instructions prior to installing this fixture.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- All wiring must be performed by a qualified electrician in accordance with national and local building and electrical codes.
- This fixture must be suitably grounded for your protection against shock hazards and to assure proper operation.
- Make sure that the power source conforms to the requirements of this fixture.

TOP VIEW

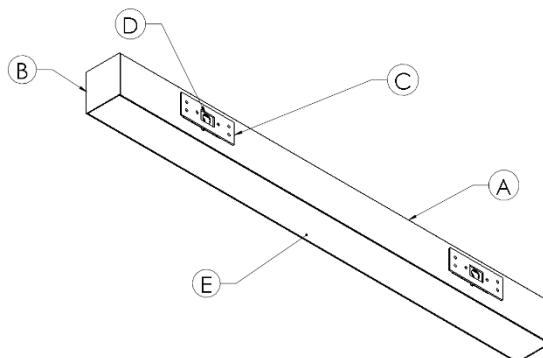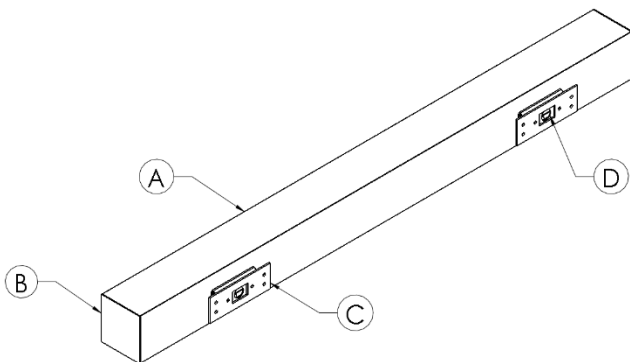


BOTTOM VIEW

PARTS LIST:


- A. LUMINAIRE**
- B. ENDCAP**
- C. WALL MOUNT
BRACKET**
- D. WIRE ENTRY HOLE**
- E. LENS**

WIRING DIAGRAM

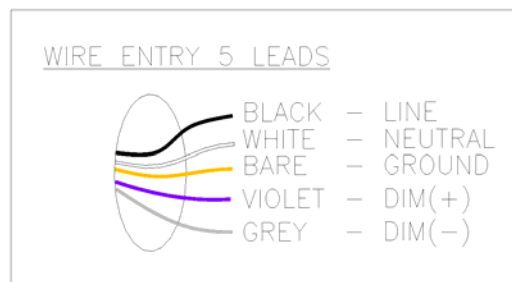


INTEGRAL DRIVER TO LINE VOLTAGE.

INSTALLATION STEPS

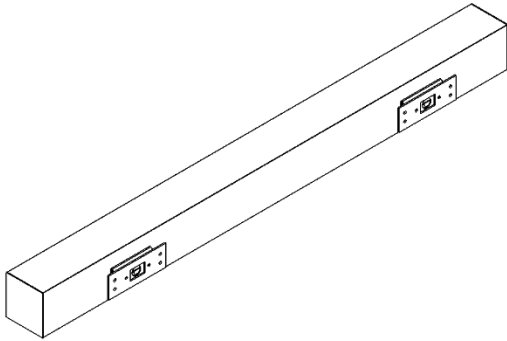


Step 1: Remove fixture packaging.

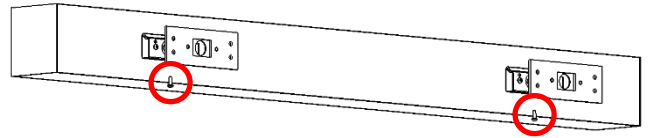


Step 2: Remove mounting screw and detach wall mount brackets.




Step 3: Mount wall brackets using 4 fasteners (supplied by others) per bracket.

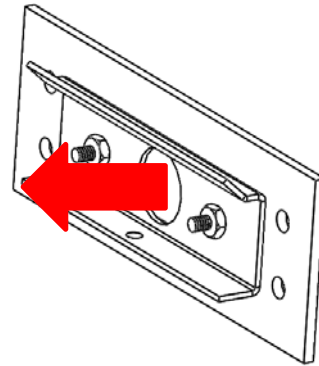

Step 4: Route wires through the wall mount bracket.

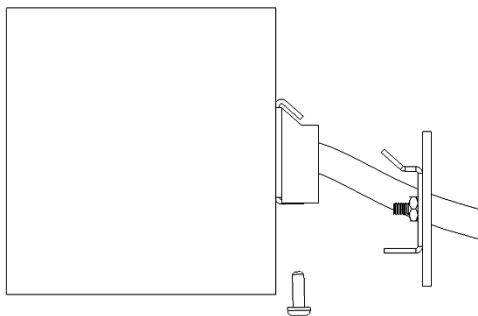


Step 5: Run wires through wire entry hole to the inside of the fixture, reattach luminaire with screws to wall mount brackets.




Step 6: Example of a completed fixture.


CONTINUOUS RUN STEPS

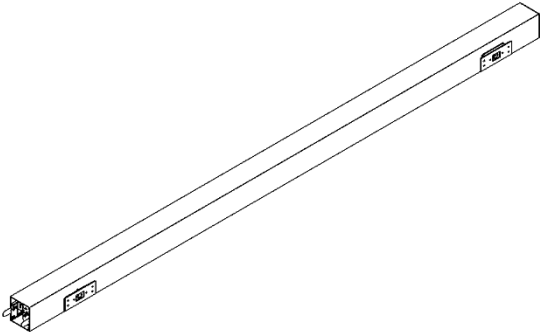


Step 1: For continuous runs, install Start fixture first. (As per Steps 1 to 6)

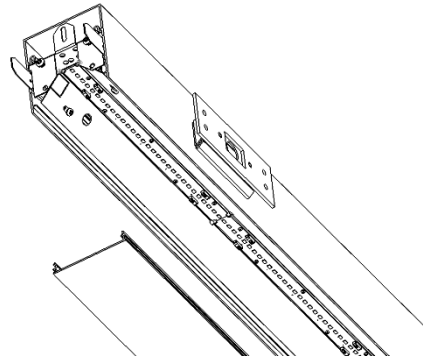


Step 2: Remove the lens from both fixtures to be joined.

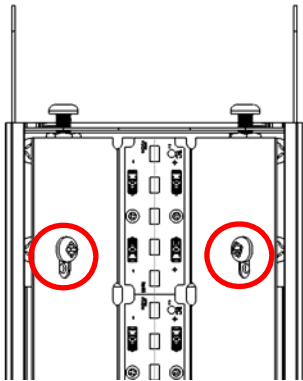


Step 3: Unscrew the reflector assembly at the joining end of both fixtures.

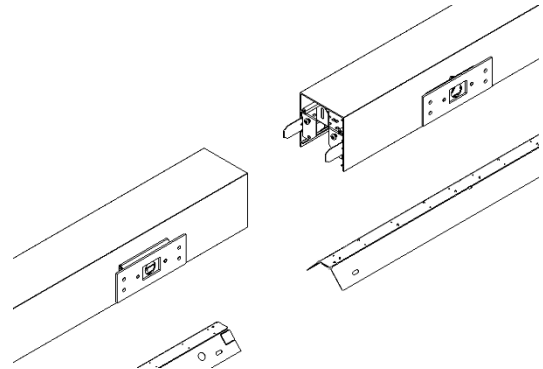

Step 4: Remove reflector assembly on joining end to access the joining brackets.

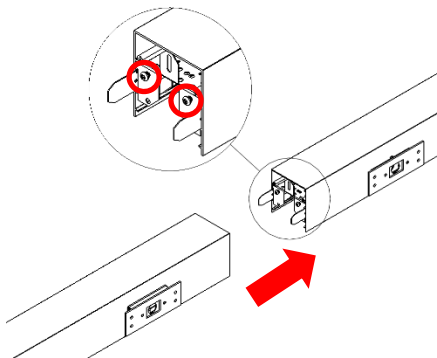

Step 5: Align mid/end fixture and slide it into place. Secure with joining hardware. Reinstall reflector assembly and lens in both fixtures. Perform necessary wiring between fixtures.

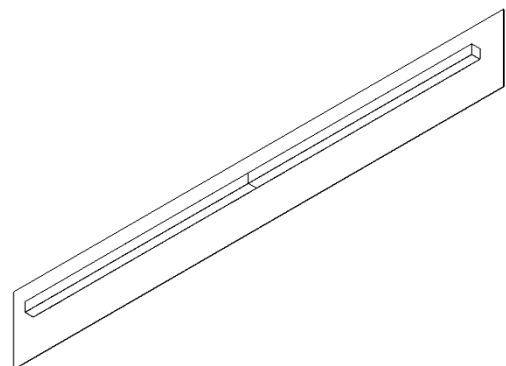

Step 6: Example of completed continuous run.

MAINTENANCE STEPS

Required Tools:




PLASTIC / LATEX GLOVES




SCREWDRIVER


Important: Use clean gloves to avoid adding oil/dirt to reflector surface. Avoid scratching reflector surface by using installation tools with soft plastic rounded edges.

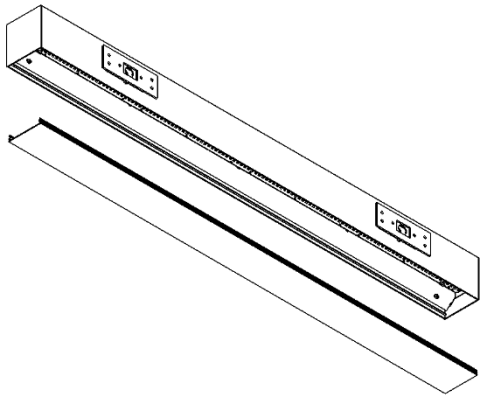


Step 1: For LED board and driver maintenance, remove the lens from the bottom of the unit. LED boards are now accessible.

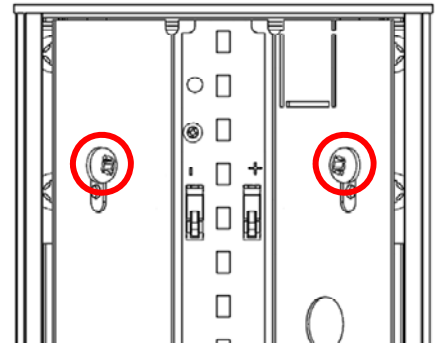

Step 2: For driver maintenance, first unscrew the reflector assembly.

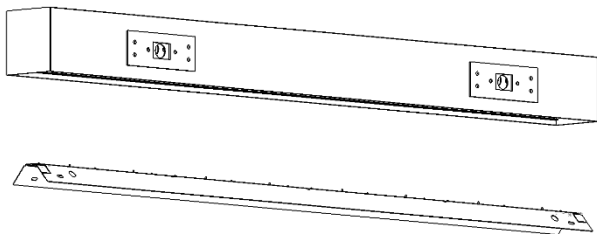

Step 3: Remove reflector assembly from unit.

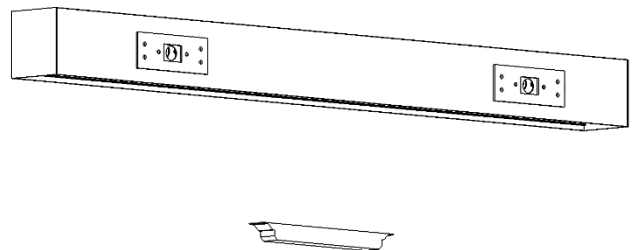

Step 4: Remove and service driver as required.