



NOTE: The following instructions provide general guidelines for product installation. For additional information consult the applicable electrical codes or contact factory directly for support before attempting anything with uncertainty.

CAUTION: Do not assemble fixture runs on floor.

WARNING: Risk of fire and electrical shock. **DISCONNECT POWER AT ELECTRICAL PANEL** before installing or servicing this product.

GENERAL SAFETY INSTRUCTIONS:

1. Read all instructions prior to installing this fixture.
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
3. All wiring must be performed by a qualified electrician in accordance with national and local building and electrical codes.
4. This fixture must be suitably grounded for your protection against shock hazards and to assure proper operation.
5. Make sure that the power source conforms to the requirements of this fixture.

Specifications and design subject to change without notice.


PARTS LIST

MAIN PARTS


- A. Luminaire Enclosure
- B. Wire Entry Hole
- C. Drywall Bracket
- D. Spring Clip
- E. Lens

OTHER PARTS

- Reflector/LED board assembly

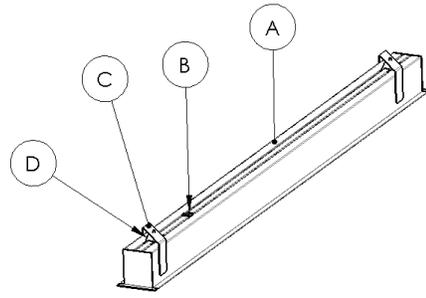

TOP VIEW

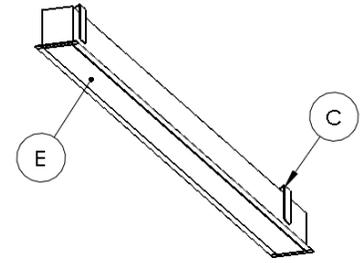

BOTTOM VIEW

REQUIRED TOOLS

DRILL	#8 PHILLIPS BIT	#8 PHILLIPS SCREWDRIVER	WRENCH

Important: Use clean gloves to avoid adding oil/dirt to optics surface. Avoid scratching optics by using installation tools with soft plastic rounded edges


WIRING DIAGRAMS

STANDARD WIRING	WITH OPTIONAL EMERGENCY PACK
<p>WIRE ENTRY 5 LEADS</p> <ul style="list-style-type: none"> BLACK — LINE WHITE — NEUTRAL BARE — GROUND VIOLET — DIM(+) GREY — DIM(-) 	<ul style="list-style-type: none"> BLACK — LINE WHITE — NEUT BARE — GROUND

Specifications and design subject to change without notice.


WITH OPTIONAL BATTERY PACK

(4) LEADS

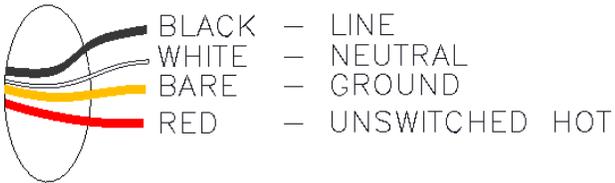


Specifications and design subject to change without notice.


STEP-BY-STEP INSTRUCTIONS

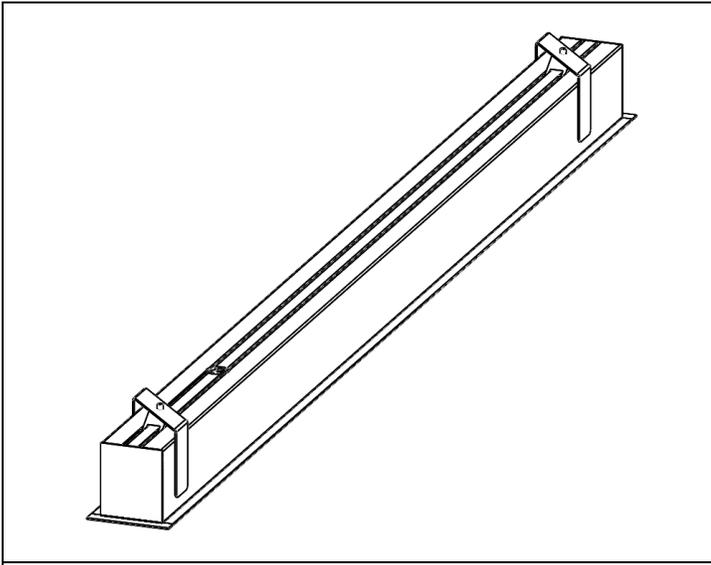


STEP 1. Remove fixture packaging.

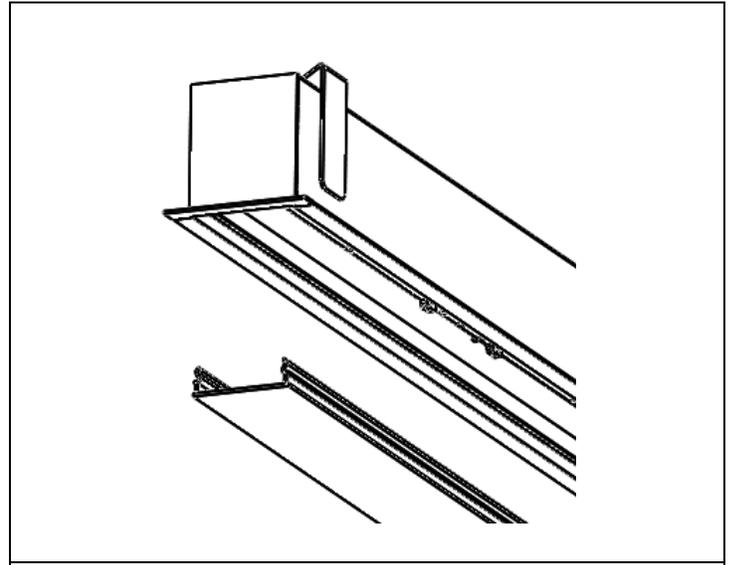

STEP 2. Remove the lens from the fixture.

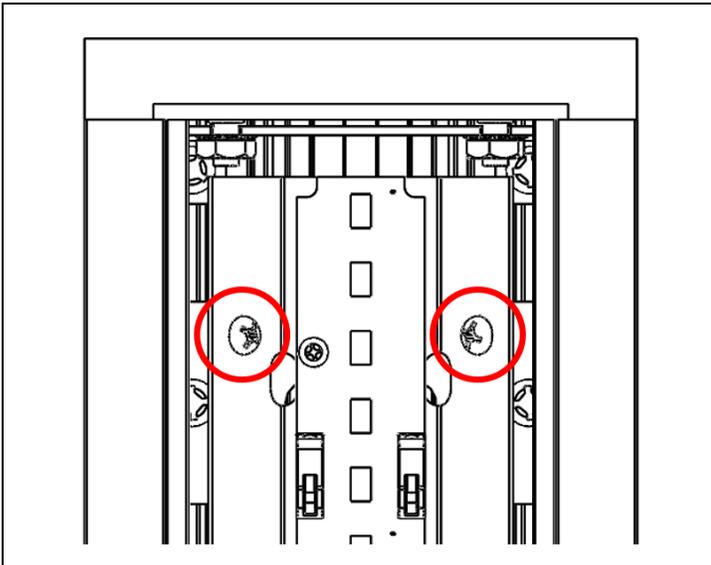


STEP 3. Remove reflector mounting screws.

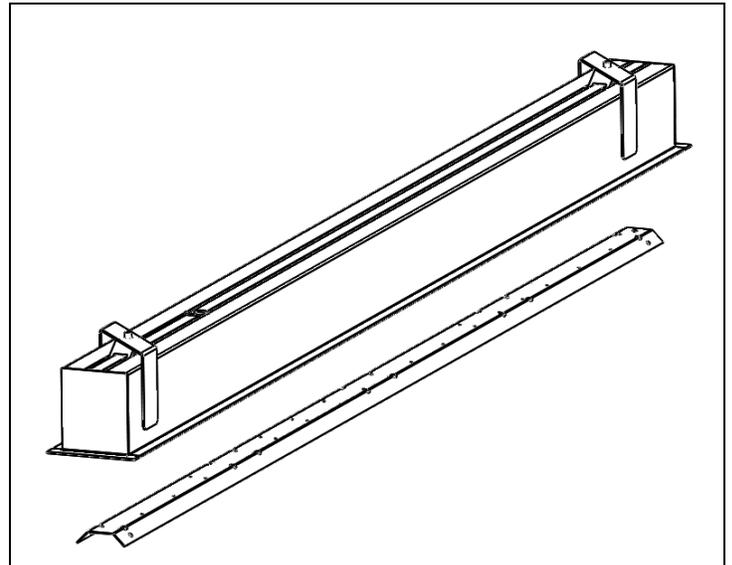


STEP 4. Remove the reflector/LED assembly.


Specifications and design subject to change without notice.

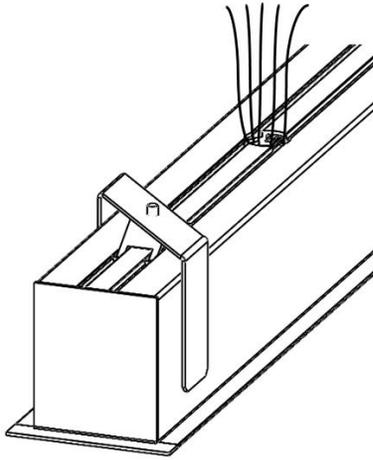

STEP 5. Run wire through junction box and out through the hole in the top of the fixture.

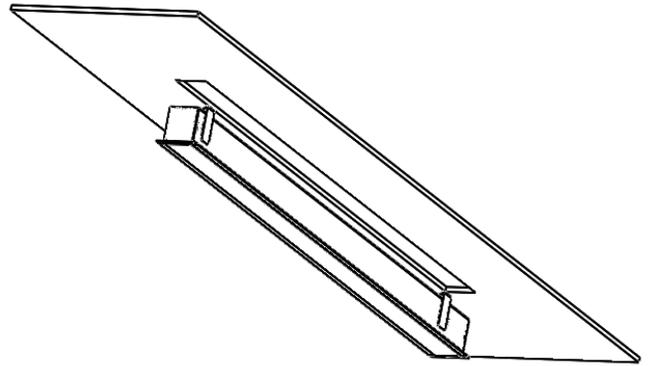


STEP 6. Insert fixture into drywall cut out in ceiling. Ensure that the drywall brackets are turned inward so the flanges are parallel to the fixture body.

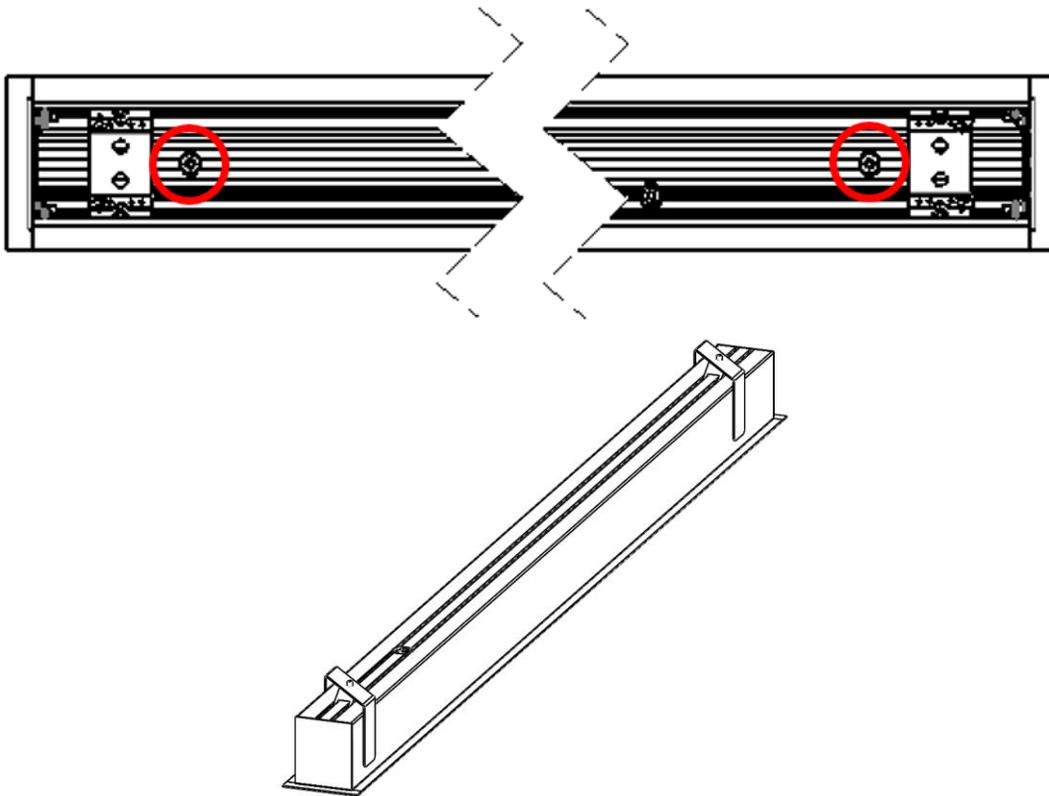


STEP 7. Attach fixture to ceiling by turning the screws attached to the drywall brackets. The brackets will rotate over the drywall to secure the fixture. Reinstall the reflector/LED assembly and lens. Installed fixture.

Specifications and design subject to change without notice.


JOINING INSTRUCTIONS

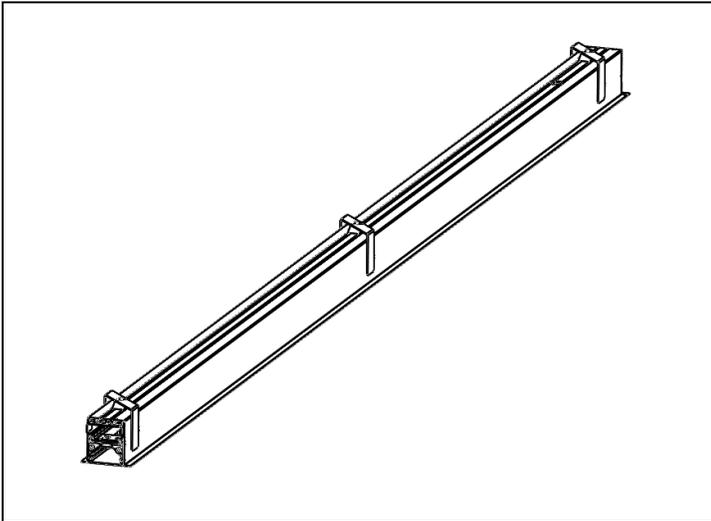


STEP 1. For continuous runs, install Start fixture first (as per standard installation instructions). Do not apply power.

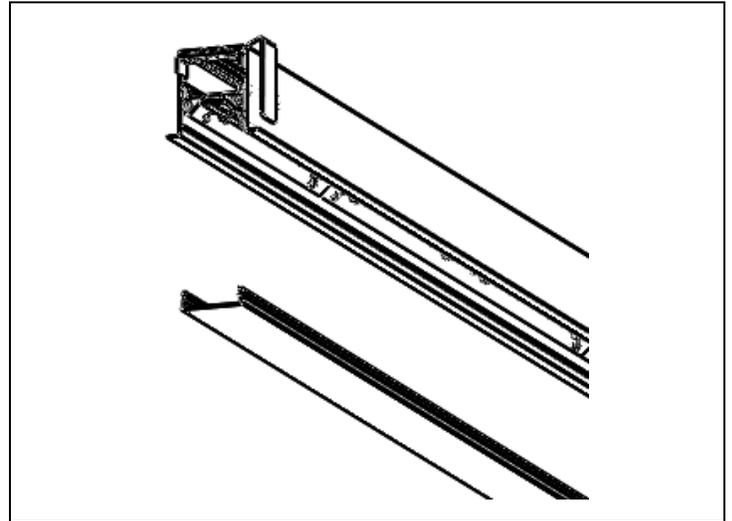

STEP 2. Remove the lens from both fixtures to be joined.

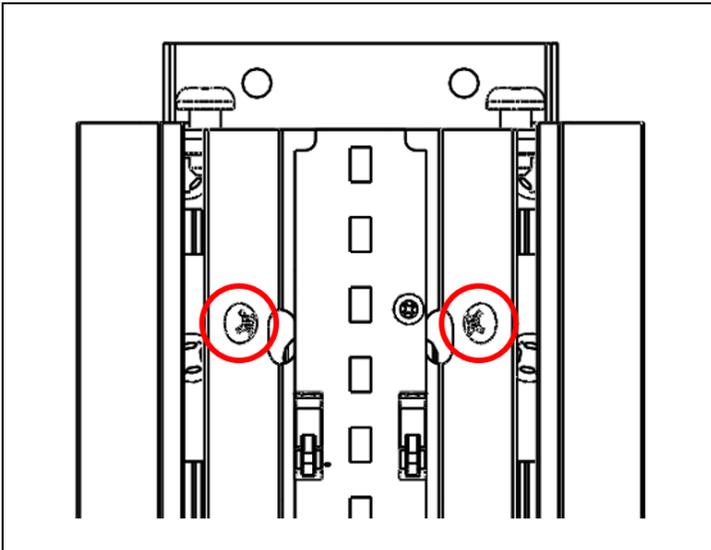


STEP 3. Remove the reflector mounting screws at the joining end of both fixtures.

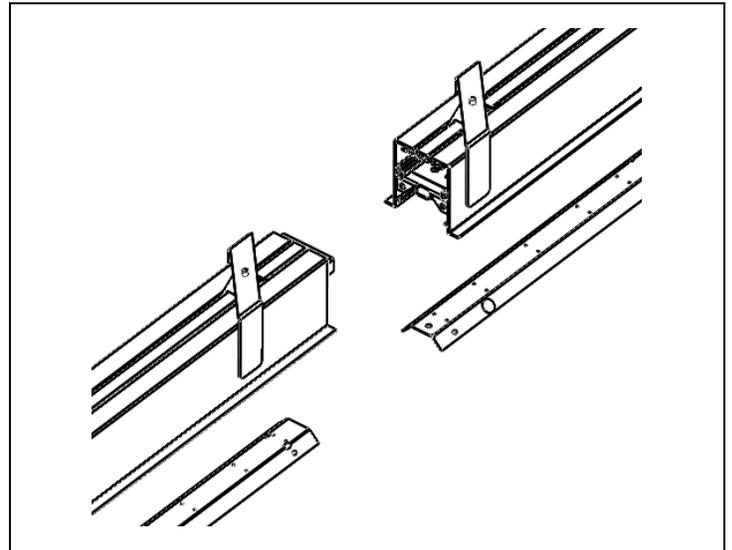


STEP 4. Remove reflector/LED assembly on joining end to access the joining brackets.

Specifications and design subject to change without notice.

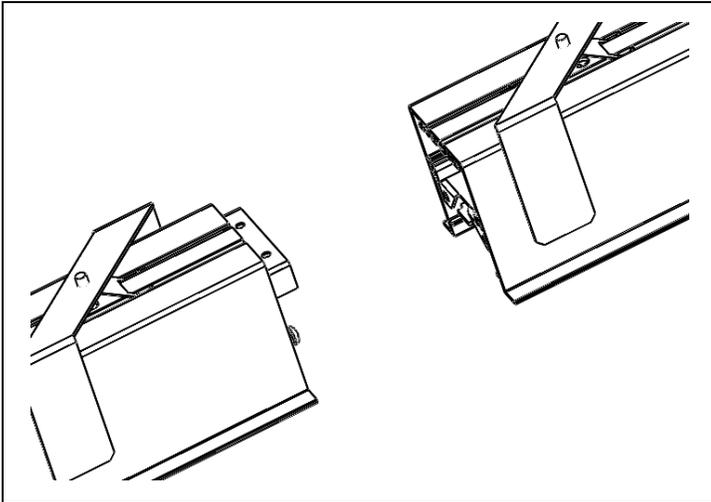

STEP 5. Align mid/end fixture and slide it into place. Secure with screws. Perform necessary wiring between fixtures. Finish installation of joined fixture as per standard instructions. Reinstall reflector/LED assembly and lens in both fixtures.

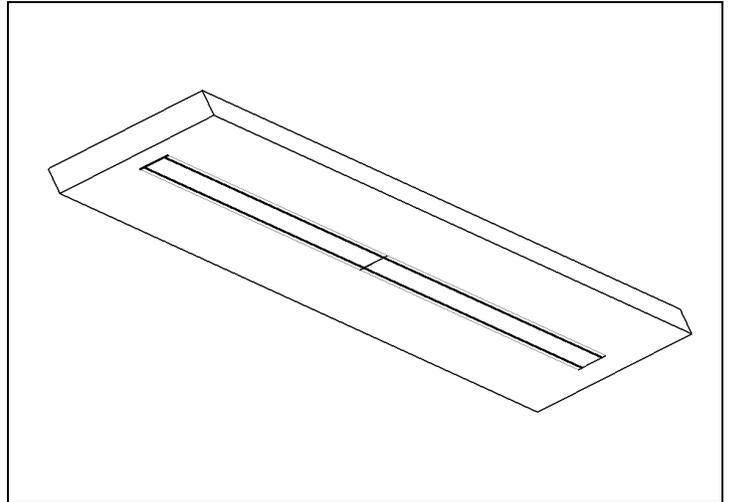

STEP 6. Example of completed continuous run. Complete remaining fixtures installation as needed.


Specifications and design subject to change without notice.

MAINTENANCE


REQUIRED TOOLS:

- Plastic / Latex Gloves
- Screwdriver


Important: Use clean gloves to avoid adding oil/dirt to reflector surface. Avoid scratching reflector surface by using installation tools with soft plastic rounded edges.

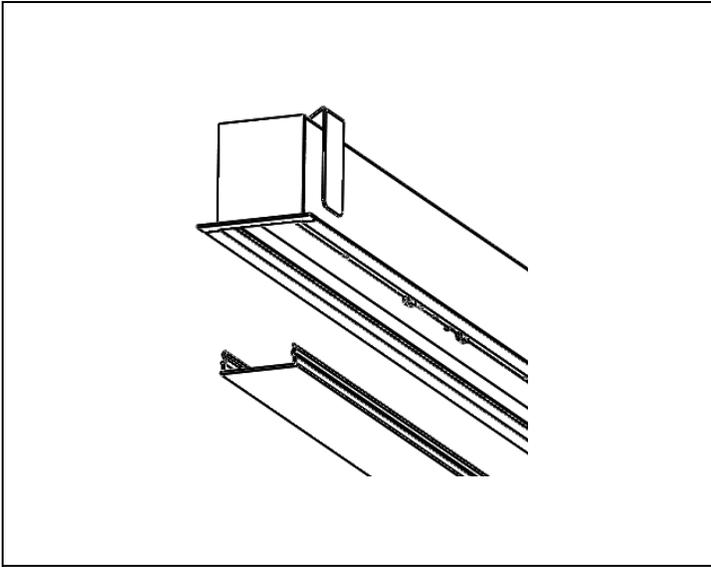


STEP 1. For LED board maintenance, remove the lens from the bottom of the unit. The LED boards are now accessible.

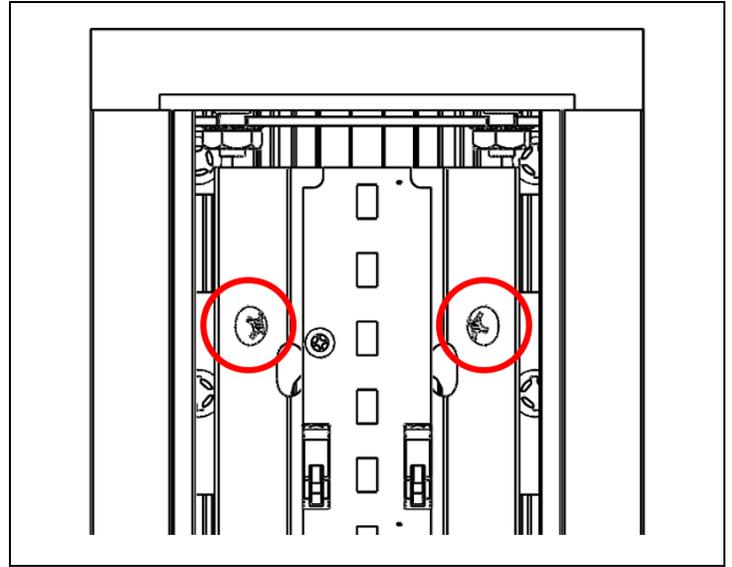

STEP 2. For driver maintenance, remove the reflector mounting screws.

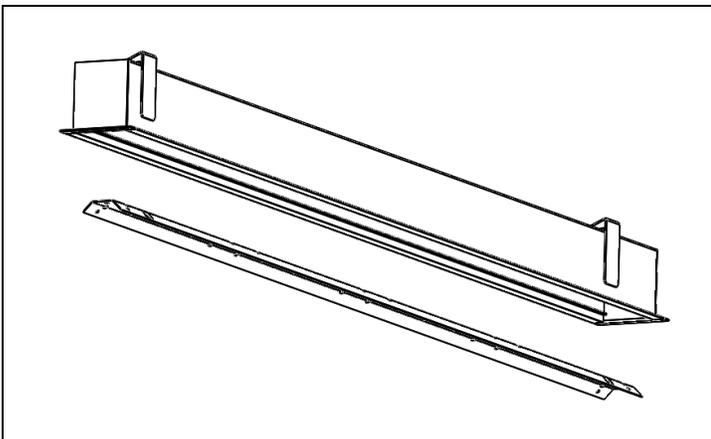

STEP 3. Remove reflector/LED assembly from unit.

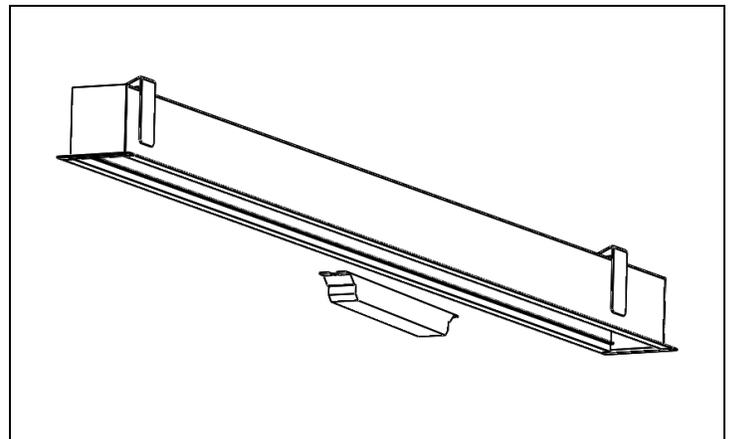

STEP 4. Remove and service driver as required.

Specifications and design subject to change without notice.