



RAIL FAMILY

Our RAIL family brings a synergy to any design layout, enhancing architectural detail and creating complementary spatial patterns.

The sleek profiles will make a statement in any open space or create interest in your conference rooms, private offices or reception areas.

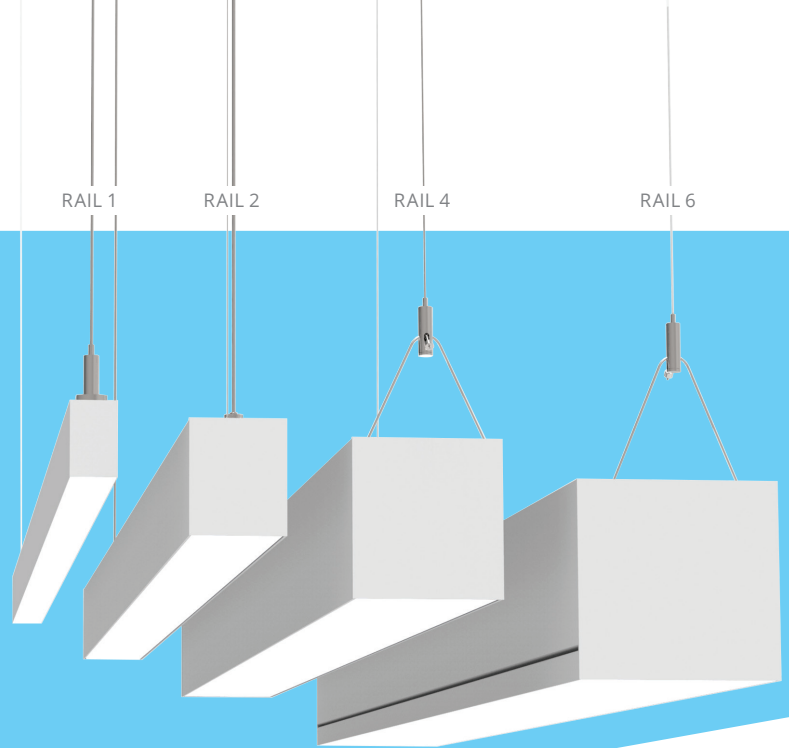

Drop Lens

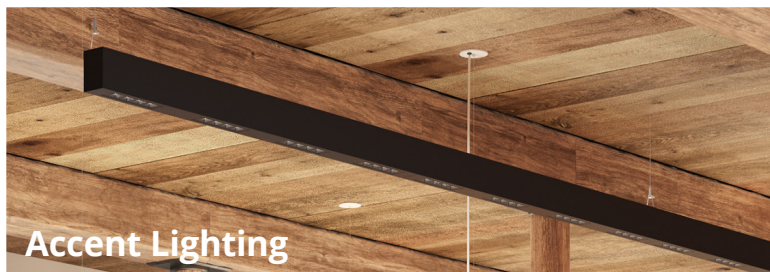

Accent Lighting



Corners



Patterns

Features*:

- 3000K, 3500K, 4000K
- Tunable White (2700 - 6500K) and Dim-to-Warm (3500-2700K)
- Fully illuminated 90° corners
- 3/4" drop lens with seamless lines of light without pixels or shadows
- Standard lengths offered from 2' to 12' in 1' increments, as well as continuous rows
- Option for daylight harvesting, occupancy and dimming control

Benefits*:

- Sleek, attractive and versatile design aesthetic
- Suitable for dry, damp and wet/outdoor locations
- UL Listed & DLC approved

* The listed may not be offered/applicable across the entire Rail family. Please refer to individual spec sheets for latest options and approvals.

RAIL FAMILY OPTIONS MATRIX

		RAIL 1	RAIL 2			RAIL 4				RAIL 6	
		RML	RM2D	RM2DU	RM4D	RM4DI	RM4DOD Outdoor	RM4I	RP4D Perimeter	S6	
		Direct	Direct	Direct/Indirect	Direct	Direct/Indirect	Direct	Indirect	Direct	Direct	
COLOR TEMP	3000K	•	•	•	•	•	•	•	•	•	
	3500K	•	•	•	•	•	•	•	•	•	
	4000K	•	•	•	•	•	•	•	•	•	
	Tunable White (2700K - 6500K)	•	•	•	•	•	•	•	•	•	
	Dim-to-Warm	•	•	•	•	•	•	•	•	•	
LENGTH	2 to 12 ft (1 ft increments)	•	•	•	•	•	•	•	•	•	
	Custom Length**	•	•	•	•	•	•	•	•	•	
	Continuous Rows**	•	•	•	•	•	•	•	•	•	
	XX = Length in ft (min. length of 2ft)								•	•	
PATTERN Patterns are not available for wall applications	Square / Rectangle	•	•	•	•	•	•	•	•	•	
	U-Shape	•	•	•	•	•	•	•	•	•	
	L-Shape	•	•	•	•	•	•	•	•	•	
	T-Shape (Custom Pattern)**	•	•	•	•	•	•	•	•	•	
	Cross / X (Custom Pattern)**	•	•	•	•	•	•	•	•	•	
	Wall-to-Ceiling Indoor (Custom Pattern)**	D, DF, S	D, DF, S		D, DF, S					D, S	
	Hexagon 2ft (Pendant mount only)		•								
OPTICS	Hexagon 3 ft (Pendant mount only)		•								
	DIRECT	Meta Blanc		•		•		•		•	
		Meta Cloud	•								
		Meta Ice		•		•		•		•	
		Drop Lens (not available in Patterns)	x T,D	x T,D		•				x T,D	
		Meta Blanc w/ Asymmetric Reflector								•	
	INDIRECT	Meta Blanc						•			
		DIRECT / INDIRECT	UP: Meta Blanc / DOWN: Meta Blanc			•		•			
			UP: Meta Blanc / DOWN: Drop Lens			x Patterns		x Patterns			
			UP: Rise Lens / DOWN: Meta Blanc			x Patterns		x Patterns			
UP: Rise Lens / DOWN: Drop Lens					x Patterns		x Patterns				
UP: Meta Ice / DOWN: Meta Ice					•		•				
UP: Batwing / DOWN: Meta Blanc						•					
ACCENT	UP: Batwing / DOWN: Drop Lens					•					
	UP: Batwing / DOWN: Meta Ice					•					
	DIRECT RECESSED DOWNLIGHT	UP: Meta Blanc / DOWN: Accent with 50° beam spread			x Patterns						
		UP: Meta Blanc / DOWN: Accent with 80° beam spread			x Patterns						
UP: Rise Lens / DOWN: Accent with 50° beam spread				x Patterns							
UP: Rise Lens / DOWN: Accent with 80° beam spread				x Patterns							
FINISH	Satin Aluminum	•	•	•	•	•	•	•	•		
	White	•	•	•	•	•	•	•	•		
	Black	•	•	•	•	•	•	•	•		
	Custom Finish (Specify RAL#)	•	•	•	•	•	•	•	•		
LIGHT LEVEL / DRIVER**	L1, L2, L3, L4 (See performance charts on spec sheets)	•	•	•	•	•	•	•	•		
	CIRCUITRY	1 Circuit	•	•	•	•	•	•	•	•	
		Up / Down Switching			•		•			•	
		Emergency / Night Light		•	•	•	•	•	•	•	
Emergency Battery Pack		•	•	•	•	•	•	•	•		
MOUNTING	Pendant Aircraft Cable	•	•	•	•	•	•	•	•		
	Pendant Aircraft Cable for T-bar	•	•	•	•	•	•	•	•		
	Solid Stem						•				
	Recessed						•				
	Recessed T-Bar (Tech-Zone)								•		
	Recessed T-Bar (Flush)	•	•		•				•		
	Recessed T-Bar Regressed 3"								•		
	Recessed Drywall Flangeless	•	•		•				•		
	Recessed Drywall (Flush)	•	•		•				•		
	Recessed Drywall Regressed 3"								•		
	Drywall Spackle Flange								•		
	Drywall Spackle Flange Regressed 3"								•		
	Surface	•	•		•		•		•		
Wall		•	•	•	•	•					
Wall Vertical						•					
VOLTAGE	120V	•	•	•	•	•	•	•	•		
	277V	•	•	•	•	•	•	•	•		
	347V	•	•	•	•	•	•	•	•		
	UNV (120-277V)	•	•	•	•	•	•	•	•		
CONTROLS	Daylight Sensor		•	•	•	•		•	•		
	Occupancy Sensor		•	•	•	•		•	•		
	Daylight & Occupancy Sensors		•	•	•	•		•	•		
	Controls not available	•					•		•		
OPTIONS	90 CRI	•	•	•	•	•	•	•	•		
	Surge Protection						•				
	End Feed (alone fixtures only)						x R, WV				
	Standard Lengths Only (No telescopic sections)								•		
Plenum - CCEA approved	•			•		•		•			

** Consult factory.

LEGEND

•	Option is not available
•	Option is available
D, DF, S	Option is available, but Wall-to-ceiling is only available for: Drywall Flanged (D), Drywall Flangeless (DF) and Surface (S) mount
x T,D	Option is available, but Drop Lens is not available for: T-Bar (T) or Drywall Flanged (D) mount
x Patterns	Option is available, but is not available in Patterns
x R, WV	Option is available, but End feed is not available for: Recessed (R) or Wall Vertical (WV) mount

For more information about our products, please visit www.metalumen.com.

Metalumen reserves the right to change specifications for product improvement without notice.

20191126 RV05