

**NOTE:** The following instructions provide general guidelines for product installation. For additional information consult the applicable electrical codes or contact factory directly for support before attempting anything with uncertainty.

**CAUTION:** Do not assemble fixture runs on floor.

**WARNING:** Risk of fire and electrical shock. **DISCONNECT POWER AT ELECTRICAL PANEL** before installing or servicing this product.

### GENERAL SAFETY INSTRUCTIONS:

1. Read all instructions prior to installing this fixture.
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
3. All wiring must be performed by a qualified electrician in accordance with national and local building and electrical codes.
4. This fixture must be suitably grounded for your protection against shock hazards and to assure proper operation.
5. Make sure that the power source conforms to the requirements of this fixture.

Specifications and design subject to change without notice.


**PARTS LIST**

**MAIN PARTS LIST**

- A. Luminaire Enclosure
- B. End Plate
- C. Lens


**OTHER PARTS**

- Reflector
- Lamp (supplied or by others)

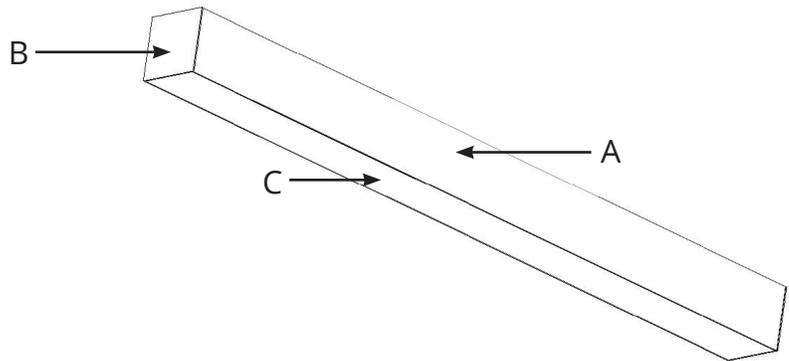


**WIRING DIAGRAMS**

**STANDARD WIRING**

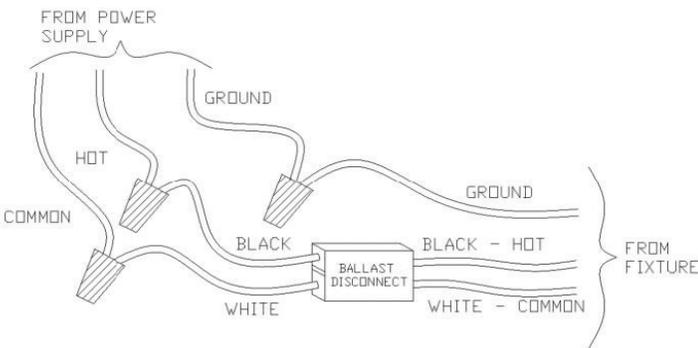


**WITH OPTIONAL EMERGENCY PACK**

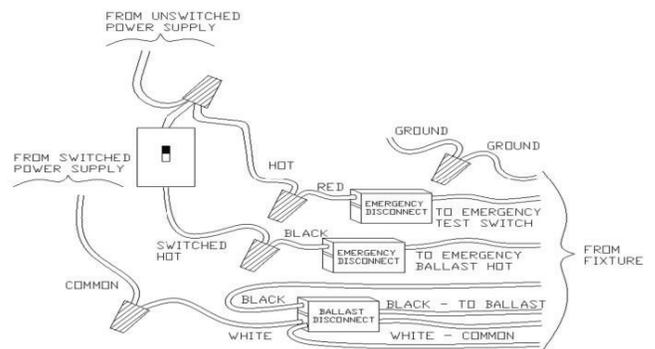


Specifications and design subject to change without notice.


STEP-BY-STEP INSTRUCTIONS

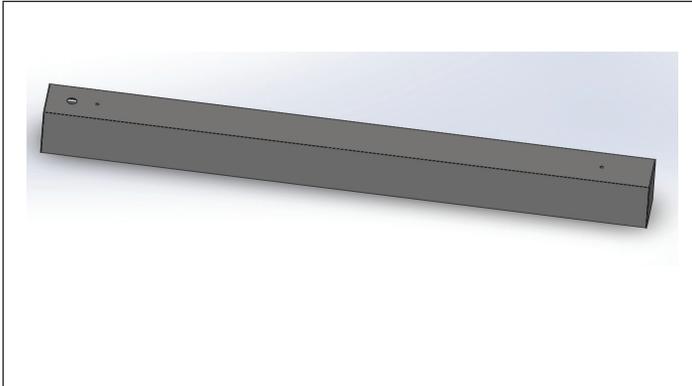


**STEP 1.** Remove fixture packaging; note marked supply wires coming out at one end of the luminaire.

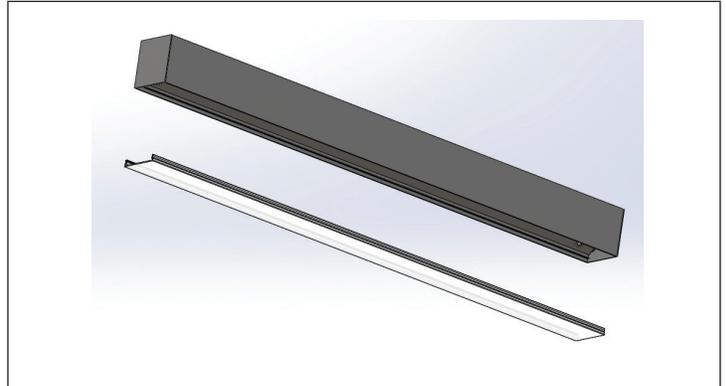

**STEP 2.** Remove lens (C).

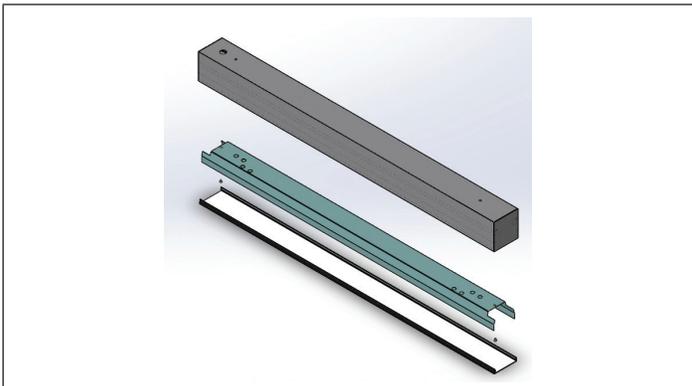


**STEP 3.** Remove reflector mounting screws and reflector. Note fixtures with optional emergency pack have a test switch and indicator light mounted on the reflector.

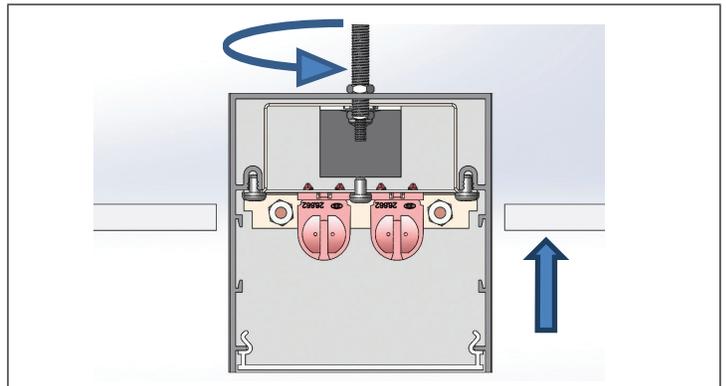

**STEP 4.** Bring electrical supply to the fixture as needed. Make sure to feed ready rod (by others) through mounting locations and adjust nut to ensure fixture is parallel with drywall, insert fixture all the way through the opening in the ceiling.

Specifications and design subject to change without notice.

STEP-BY-STEP INSTRUCTIONS

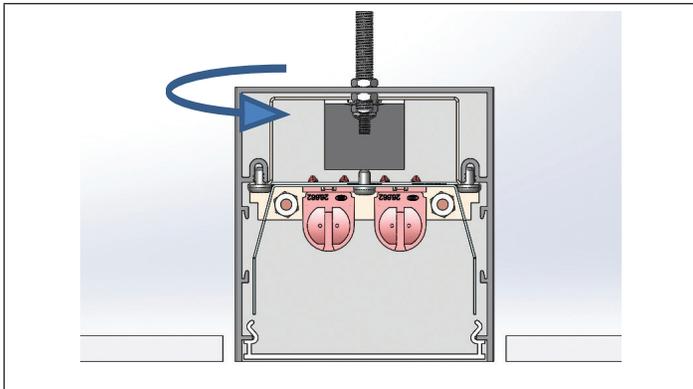

**STEP 5.** Once fixture is parallel with drywall insert second nut (supplied by other) through the fixture and fasten to fix fixture in place. Repeat steps 4 & 5 with remaining mounting locations until fixture is parallel along entire length.



**STEP 6.** Perform electrical wiring inside the fixture and reattach reflector with (2) mounting screws. Optional emergency ballast must be fed from the same branch circuit as the AC ballast.




**STEP 7.** Insert lamps.



**STEP 8.** Re-attach lens. Start with one side first and close the other side starting from the corner.

Specifications and design subject to change without notice.

## STEP-BY-STEP INSTRUCTIONS

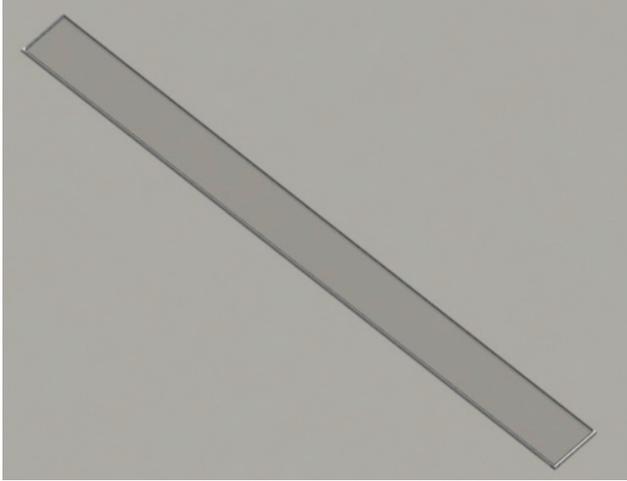

**STEP 9.** Installed fixture.

Specifications and design subject to change without notice.