

**NOTE:** The following instructions provide general guidelines for product installation. For additional information consult the applicable electrical codes or contact factory directly for support before attempting anything with uncertainty.

**CAUTION:** Do not assemble fixture runs on floor.

**WARNING:** Risk of fire and electrical shock. **DISCONNECT POWER AT ELECTRICAL PANEL** before installing or servicing this product.

### GENERAL SAFETY INSTRUCTIONS:

1. Read all instructions prior to installing this fixture.
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
3. All wiring must be performed by a qualified electrician in accordance with national and local building and electrical codes.
4. This fixture must be suitably grounded for your protection against shock hazards and to assure proper operation.
5. Make sure that the power source conforms to the requirements of this fixture.

Specifications and design subject to change without notice.


PARTS LIST

**MAIN PARTS**

- A. Luminaire Enclosure
- B. Mullion Mounting Block
- C. End Plate
- D. Lens
- E. Screw
- F. Joiner Plate

**OTHER PARTS**

- Reflector/LED Assembly
- Electrical Box (by others)
- Fasteners (by others)

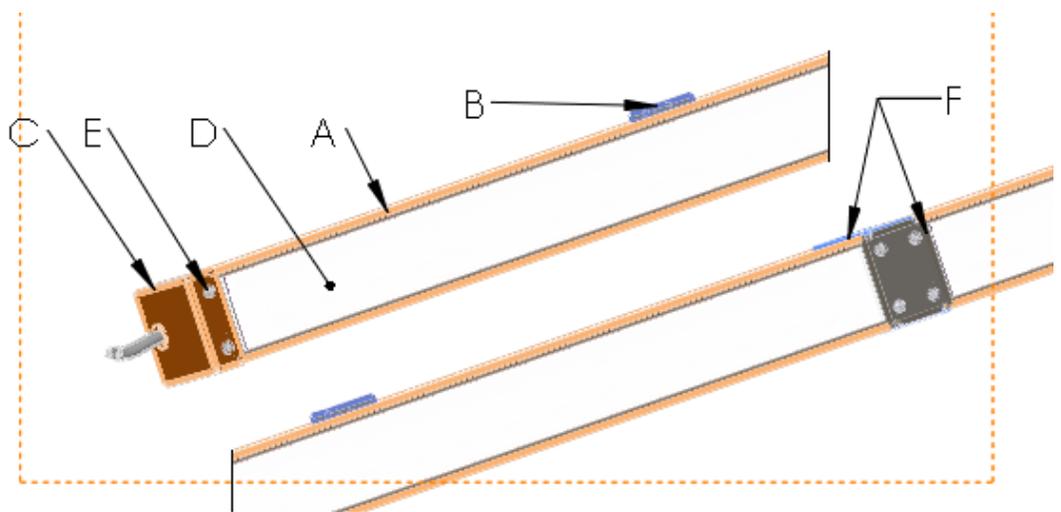


REQUIRED TOOLS

DRILL	#8 PHILLIPS BIT	#8 PHILLIPS SCREWDRIVERS	WRENCH

**Important:** Use clean gloves to avoid adding oil/dirt to optics surface. Avoid scratching optics by using installation tools with soft plastic rounded edges

WIRING DIAGRAMS


STANDARD WIRING

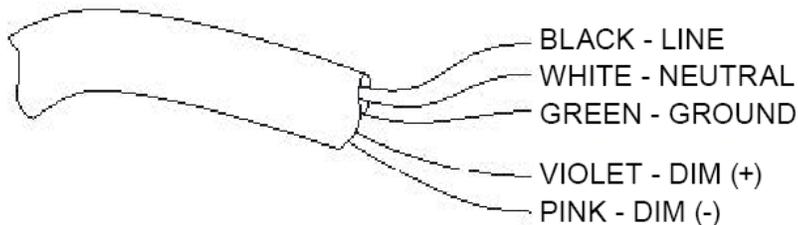


**(18-5) STANDARD WIRE ENTRY**  
(CAP OFF VIOLET & PINK IF DIMMING NOT REQUIRED)

Specifications and design subject to change without notice.


STEP-BY-STEP INSTRUCTIONS

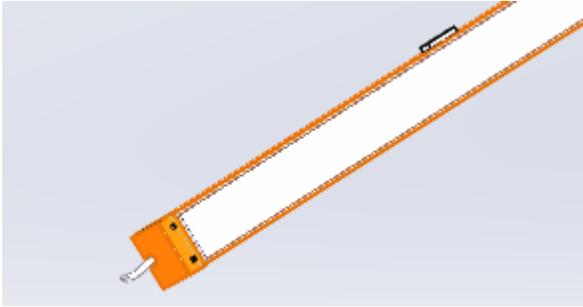


**STEP 1.** Remove fixture packaging; note marked supply wires coming out at the end of the luminaire.

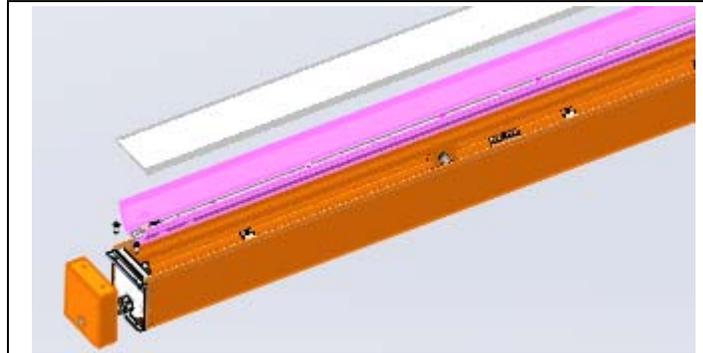

**STEP 2.** Remove Screws (E), Joiner Plates (F) and End Plates (C). Remove Lens. Remove Screws for Reflector then remove Reflector. Do not disconnect wires to the LED boards.

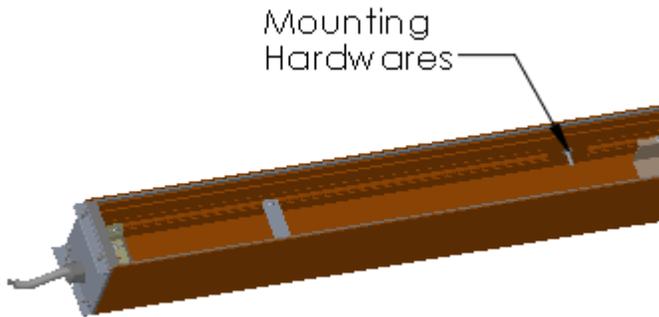


**STEP 3.** Remove Nuts and Washers for the Mullion Mounting Blocks. Remove the blocks from fixture.

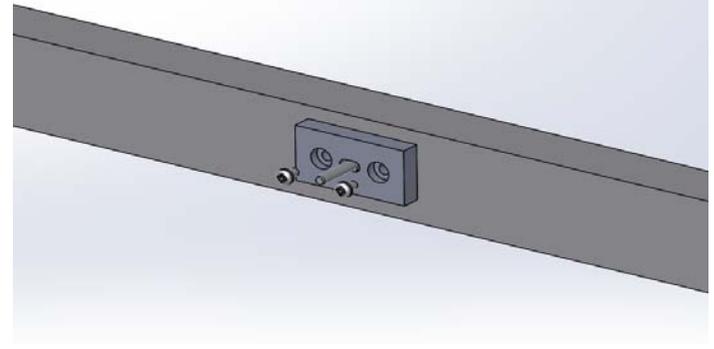


**STEP 4.** Using the Block as a temple, drill holes (3.18) on mullion. Make sure the Block mounting center distance match the holes on the fixture. Attach the Carriage Bolt at the back of block then mount the block to the mullion using 2x#8 Self-tapping screws (by others). Note this block can be mounted horizontally or vertically.

Specifications and design subject to change without notice.

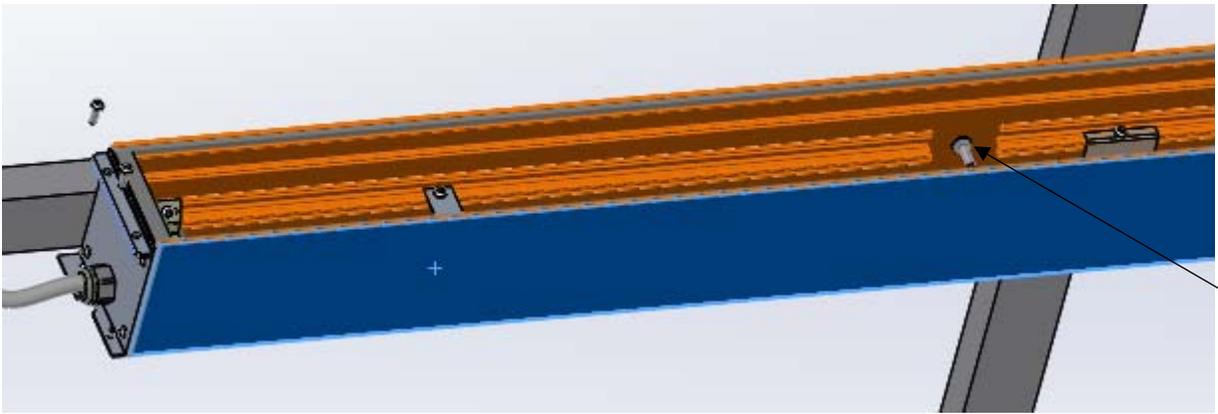


**STEP 5.** Attach the fixture to the Carriage Bolts. Secure with the washers and nuts. Connect the wirings then do a complete test.

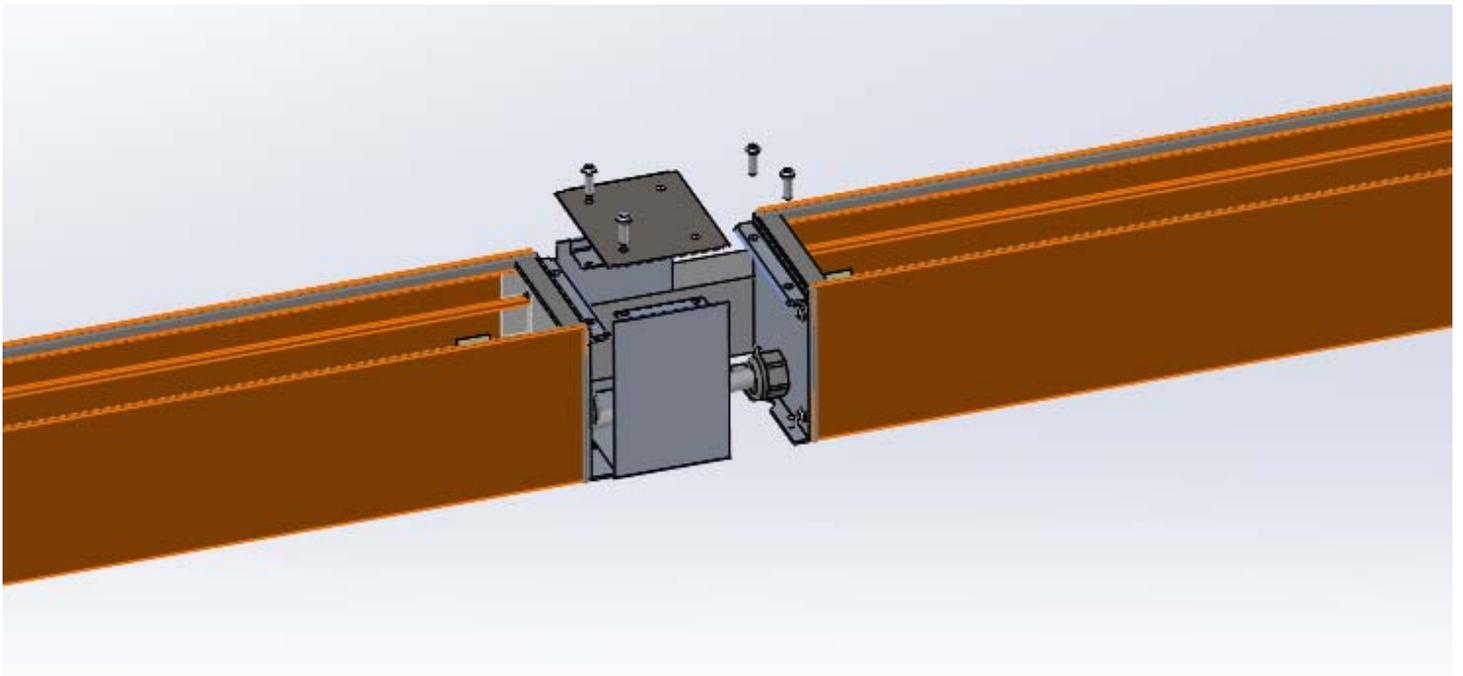

**STEP 6.** To join a fixture, follow steps 1-5 to install the fixture first. Make sure using the Joiner Plate as a template to locate the fixture. Insert power cord from adjacent fixture to the connector then tighten the connector. Connect the wirings then do a complete test.

Specifications and design subject to change without notice.

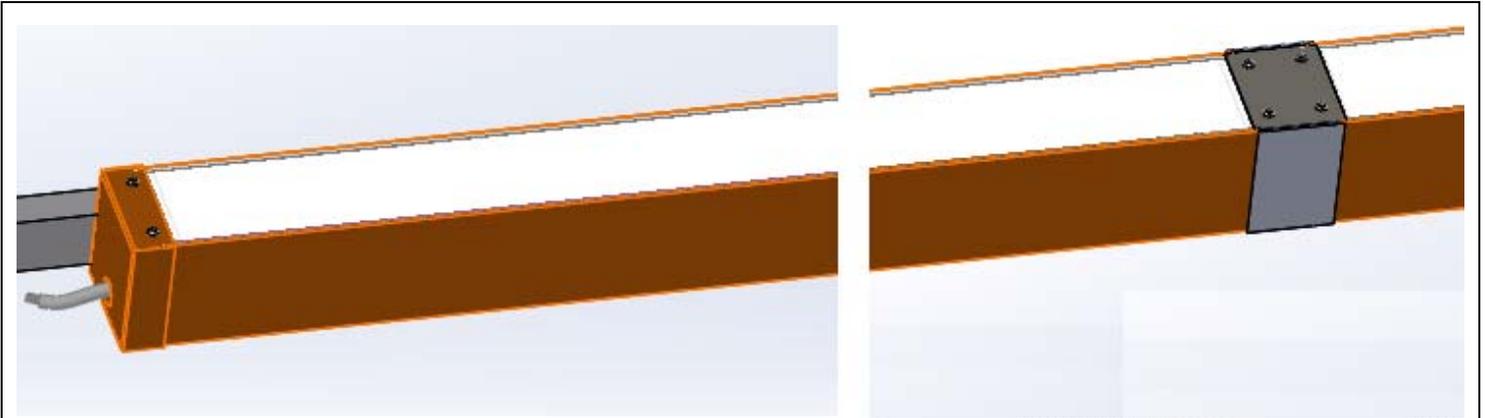

**STEP 9.** Attach the reflector back and fasten with the screws.  
Install the Lens and the End Plates, Joiner Plates to complete the installation. (Reverse of STEP 2)

Specifications and design subject to change without notice.