

NOTE: The following instructions provide general guidelines for product installation. For additional information consult the applicable electrical codes or contact factory directly for support before attempting anything with uncertainty.

CAUTION: Do not assemble fixture runs on floor.

WARNING: Risk of fire and electrical shock. **DISCONNECT POWER AT ELECTRICAL PANEL** before installing or servicing this product.

GENERAL SAFETY INSTRUCTIONS:

1. Read all instructions prior to installing this fixture.
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
3. All wiring must be performed by a qualified electrician in accordance with national and local building and electrical codes.
4. This fixture must be suitably grounded for your protection against shock hazards and to assure proper operation.
5. Make sure that the power source conforms to the requirements of this fixture.

Specifications and design subject to change without notice.


PARTS LIST

MAIN PARTS

- A. Luminaire Enclosure
- B. Lens
- C. Power Cord

OTHER PARTS

- Reflector/LED board assembly
- Driver and Driver Enclosure assembly

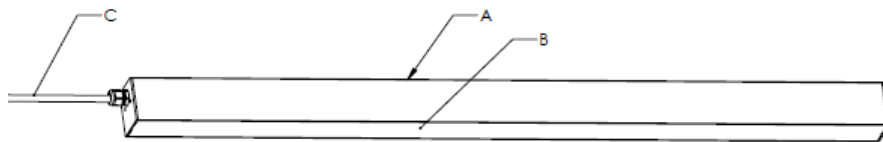


Specifications and design subject to change without notice.

REQUIRED TOOLS


| DRILL | #8 PHILLIPS BIT | #8 PHILLIPS SCREWDRIVER | WRENCH |
|---|---|---|--|
|  |  |  |  |

Important: Use clean gloves to avoid adding oil/dirt to optics surface. Avoid scratching optics by using installation tools with soft plastic rounded edges

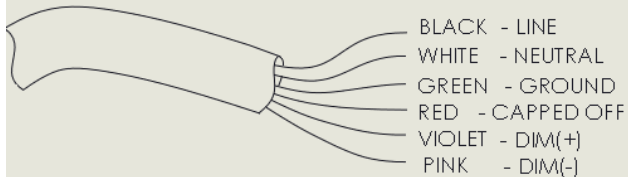
WIRING DIAGRAMS
STANDARD WIRING
(18-6)


Specifications and design subject to change without notice.


STEP-BY-STEP INSTRUCTIONS




STEP 1. Remove fixture packaging.

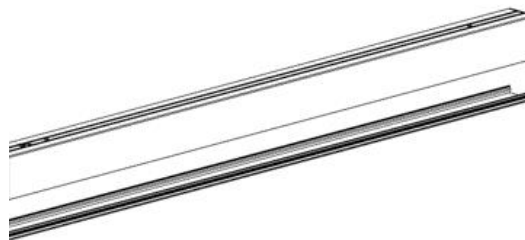


STEP 2. Remove the lens from the fixture.

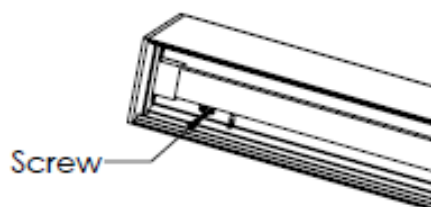


STEP 3. Remove screws from the reflector assembly.

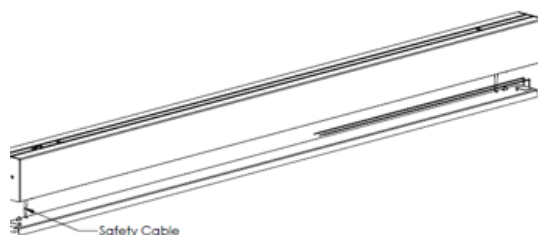

STEP 4. Lower the reflector assembly, hung on safety cable.

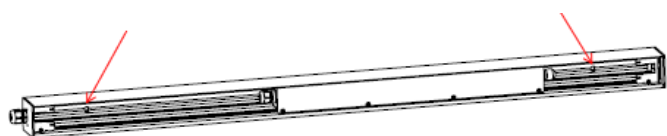


STEP 5. Attach fixture to wall vertically using screws (supplied by others) through the holes in the extrusion, ensuring the wire entry is on the top (noted the drain holes are at the bottom). Ensure fixture is secured to a sufficiently strong structure.




STEP 6. Wire fixture using waterproof wire nuts inside junction box (connector/nuts/junction box supplied by others). Refer to provided wiring.

Specifications and design subject to change without notice.

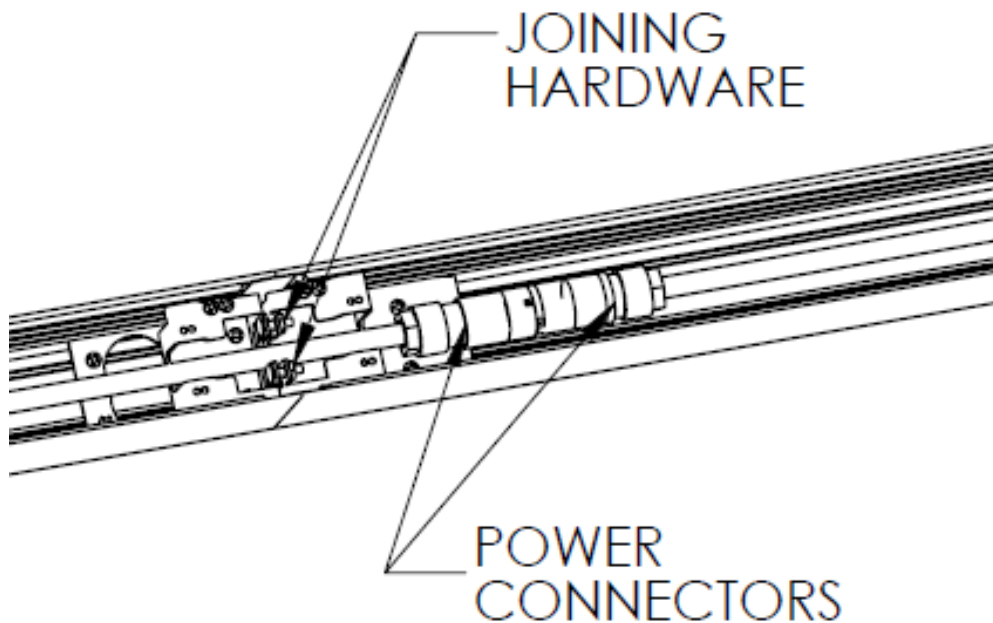

STEP 7. For continuous runs, install Start fixture first (as per steps 1-6). Do not apply power. Install joining fixture (as per steps 1-4). Align joining fixture and slide it into place, then follow step 5 to secure the fixture to wall. Install joining hardware. Then connect power connectors together. Reinstall reflector assembly and lens.



STEP 8. Installed fixture.


Specifications and design subject to change without notice.

MAINTENANCE

REQUIRED TOOLS:

- Plastic / Latex Gloves
- Screwdriver

Important: Use clean gloves to avoid adding oil/dirt to reflector surface. Avoid scratching reflector surface by using installation tools with soft plastic rounded edges.

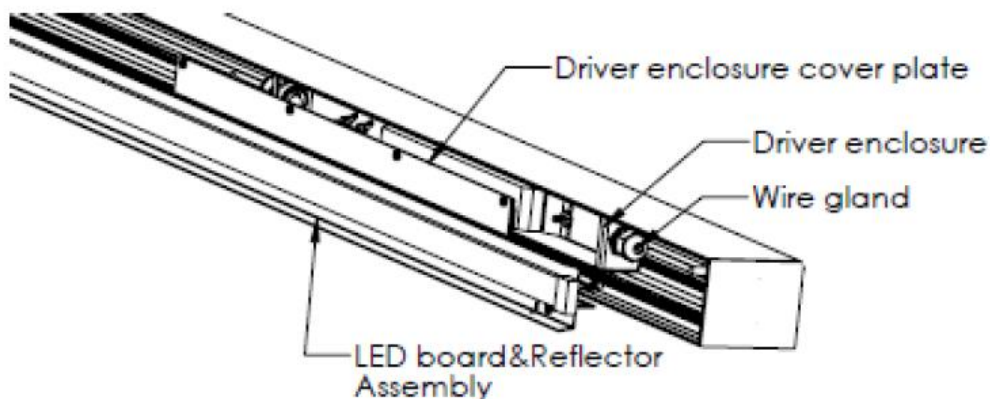

Remove lens from the unit. Remove screws from the reflector assembly. Lower the reflector assembly, hung on safety cable. Remove the screws and then remove the driver enclosure cover plate.

1. For LED board maintenance:
Disconnect the wires from driver, loose the wire gland, disconnect the safety cable and then completely remove the entire LED board & Reflector Assembly. Install the new LED board & Reflector by installing the safety cables to body, passing the wires through the wire gland and tightening the wire gland. Then connect the wires to driver (Red to led+, blue to led-). Reinstall driver enclosure cover plate and then mount LED board & reflector assembly to fixture. Reinstall lens.
2. For driver maintenance:
Remove and service driver as required. Be sure to wire correctly (both power and dimming, and the wires to LED board). Reinstall driver enclosure cover plate, ensure all wires are inside of the driver enclosure and then mount LED board & reflector assembly to fixture. Reinstall lens.

Specifications and design subject to change without notice.