

SOL

SOL

Direct | LED | Recessed




A lighting solution with depth

With an even distribution of light, Sol (SOL) is the perfect way to add ambient lighting and interest to any ceiling. Interesting on its own, scattered across the ceiling or grouped in clusters at various lens depths, Sol adds visually stunning texture and character to create a unique ceiling in your space.

SOL OFFERS THE FOLLOWING INDUSTRY LEADING FEATURES:

- Up to 113 lm/W
- Available with Tunable White
- Adjustable on site, allowing for flush or drops of 2" (or 1"), 4" (or 3") and 6" (or 5")
- Color consistency 3 SDCM

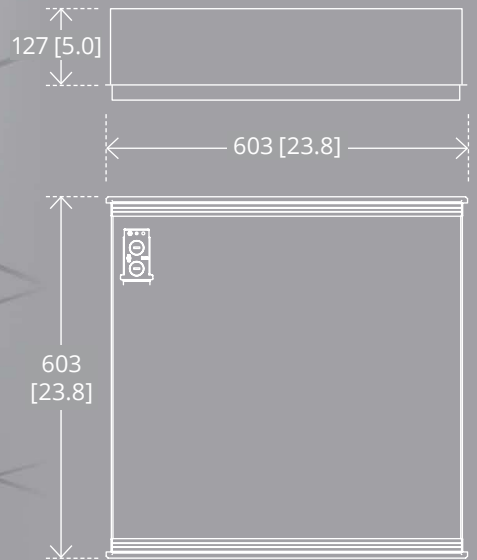

The recessed 2x2' Sol produces an even glow with clean corners making it ideal for uniform illumination of work areas, halls, school lobbies and open spaces.

ORDERING LOGIC

Sample part number: **SOL-4L35K-22-A2-W-L21-T-3-90**


Series/Model	SOL	
Color Temp	4L30K	3000K
	4L35K	3500K
	4L40K	4000K
	4LTUN	Tunable White (2700 - 6500K)*
		90 CRI is available under OPTIONS
Size	22	2 x 2 ft
Optics	AF	Acrylic Flush Lens
	A2	Acrylic 2 Inch Drop Lens (Adjustable to 1 Inch Drop Lens on site)
	A4	Acrylic 4 Inch Drop Lens (Adjustable to 3 Inch Drop Lens on site)
	A6	Acrylic 6 Inch Drop Lens (Adjustable to 5 Inch Drop Lens on site)
Finish	W	White
Light Level/Driver	L1	See Performance Summary at 3500K below
	L2	
	L3	
Circuitry	1	1 Circuit
	B	Emergency Battery Pack
Mounting	T	Recessed T-bar
	Recessed Drywall Mounting Kit is available under OPTIONS	
Voltage	3	347V
	4	UNV (120 - 277V)
Controls* / Sensors*	(empty)	None (Leave space empty)
Options	90	90 CRI, High R9
	DK22	Recessed Drywall Kit 2x2
	P	Plenum
	(empty)	None (Leave space empty)

*Consult factory.

BENEFITS


- Versatile and easy to install
- Improved uniform illumination
- Appealing and unique illuminated edge lines
- Suitable for dry or damp locations

LENS DEPTHS

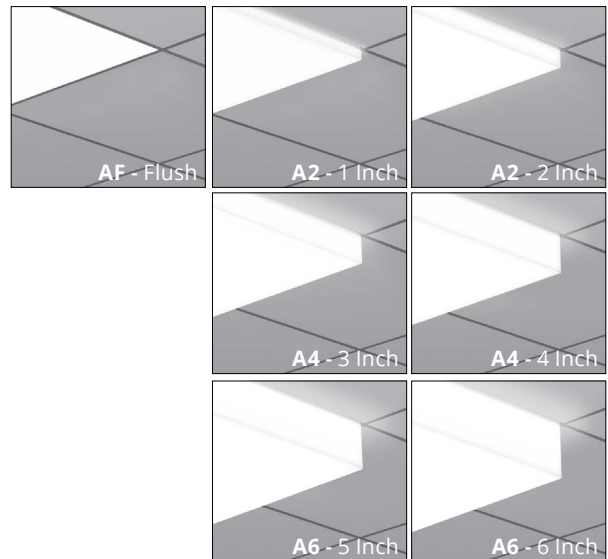

PERFORMANCE SUMMARY at 3500K

	2 Inch Drop		
	L	W	E
L1	2147	19.0	113
L2	3211	29.0	111
L3	4293	38.8	111
Color Rendering (CRI) ¹	80+		
L80 Estimate (h)	≥ 50,000 hrs		



2 Inch Drop
 Efficacy: 111 lm/W
 Lumens: 3211
 Wattage: 29.0
 93% Down / 7% Up
 File: SOL-4L35K-22-A2-L2

For more information about our new products, please visit www.metalumen.com

Metalumen reserves the right to change specifications for product improvement without notice.

20190830