

IS-0247-01 rev.01

**GRANDE RECESSED FLANGELESS LED
INSTALLATION INSTRUCTIONS**

NOTE

The following instructions provide general guidelines for product installation. For additional information consult the applicable electrical codes or contact factory directly for support before attempting anything with uncertainty.

CAUTION

Do not assemble fixture runs on floor.



WARNING

Risk of fire and electrical shock. **DISCONNECT POWER AT ELECTRICAL PANEL** before installing or servicing this product.

General Safety Instructions

- Read all instructions prior to installing this fixture.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- All wiring must be performed by a qualified electrician in accordance with national and local building and electrical codes.
- This fixture must be suitably grounded for your protection against shock hazards and to assure proper operation.
- Make sure that the power source conforms to the requirements of this fixture.

TOP VIEW

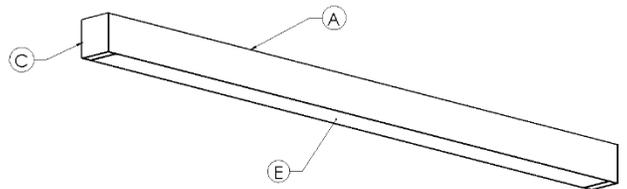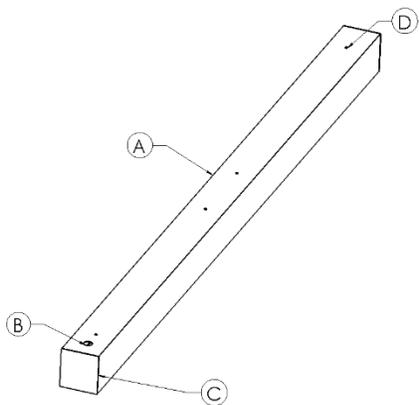


BOTTOM VIEW





PARTS LIST:


- A. LUMINAIRE**
- B. WIRE ENTRY KNOCKOUT**
- C. ENDPLATE**
- D. MOUNTING HOLE**
- E. LENS**

WIRING DIAGRAM

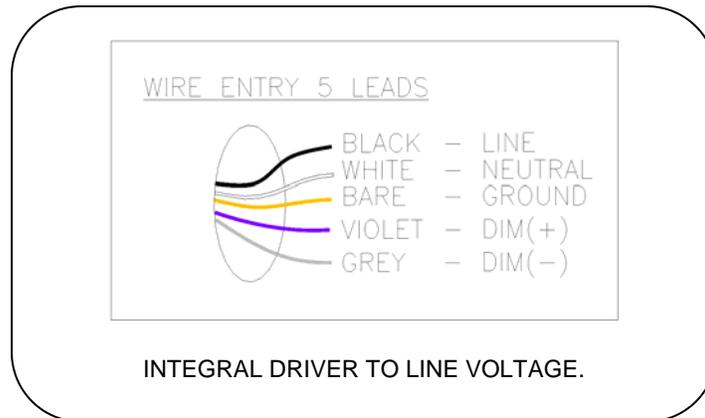


INSTALLATION STEPS

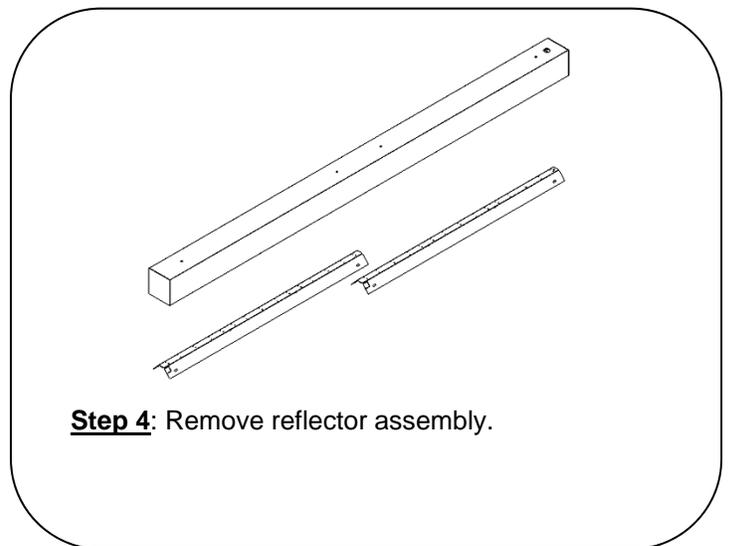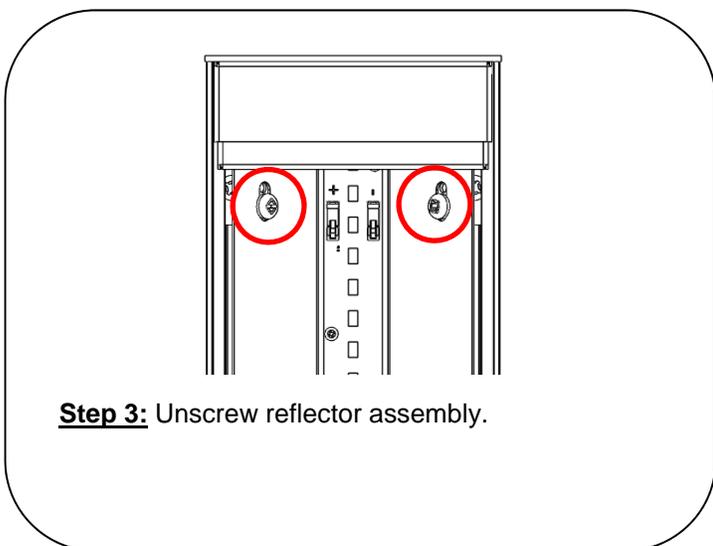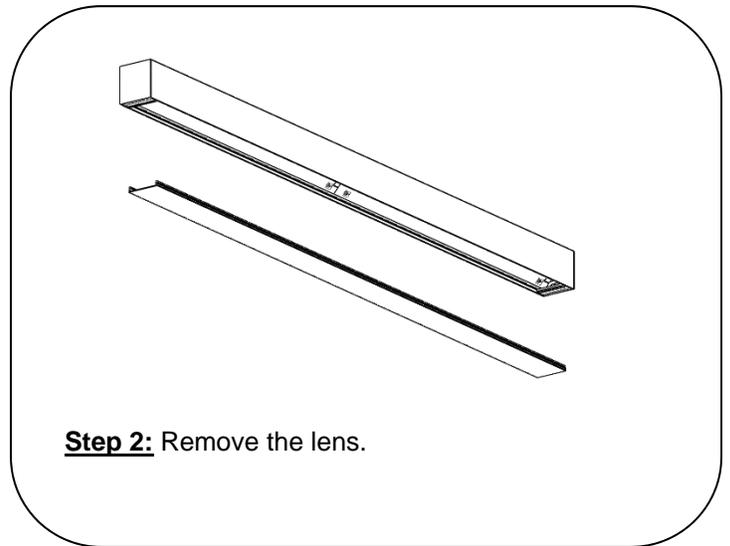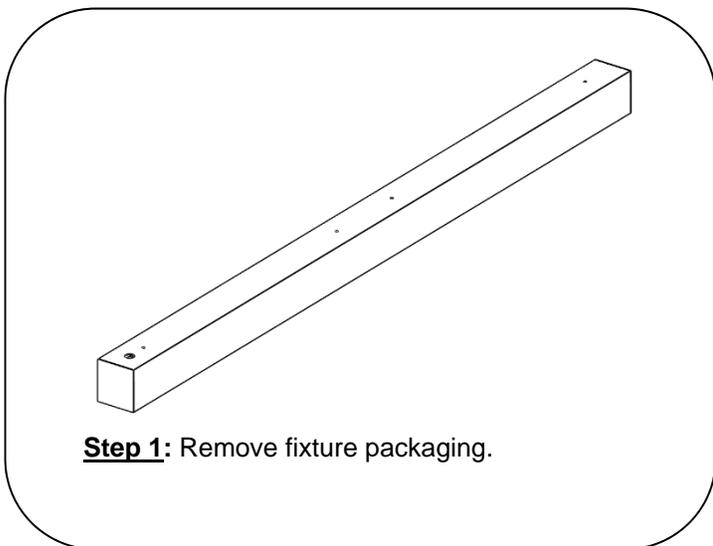


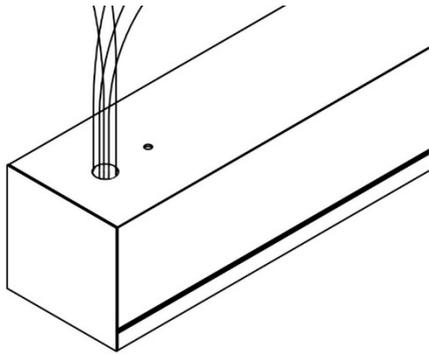


Step 5: Run wires through junction box and out through the hole in the top of the fixture.

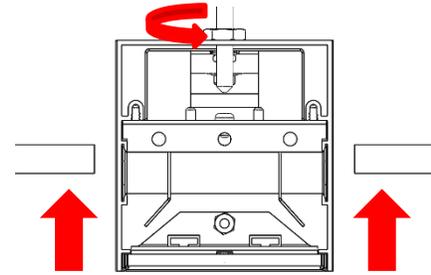

Step 6: Make sure to feed ready rod (by others) through mounting locations and adjust nut to ensure fixture is parallel with drywall, insert fixture all the way through the opening in the ceiling.






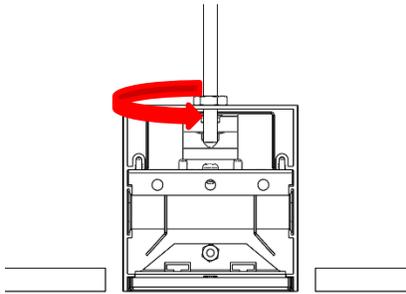


Step 7: Once fixture is parallel with drywall insert second nut (supplied by others) through the fixture and fasten the fixture in place. Repeat steps 6 & 7 with remaining mounting locations until fixture is parallel along entire length.

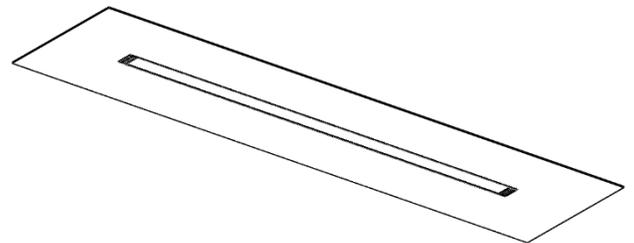

Step 8: Replace reflector assembly and lens.

CONTINUOUS RUN STEPS

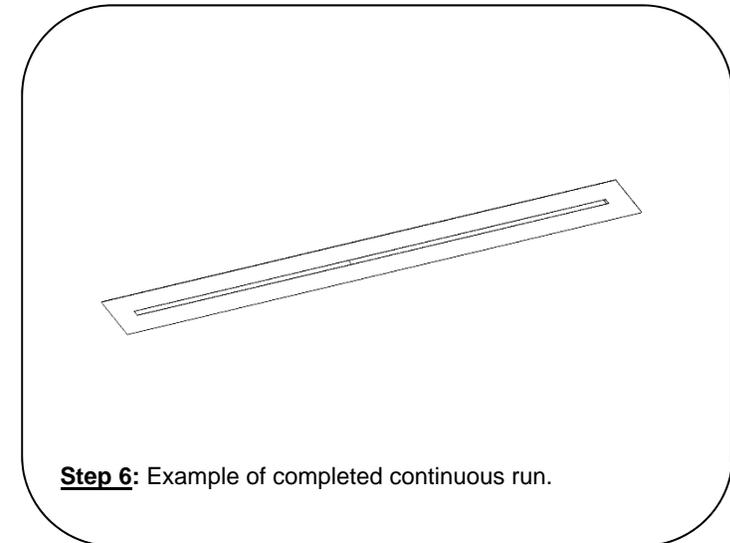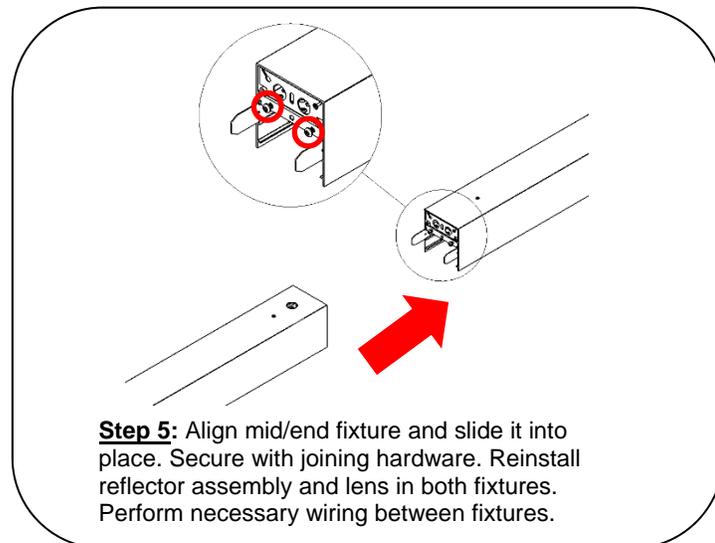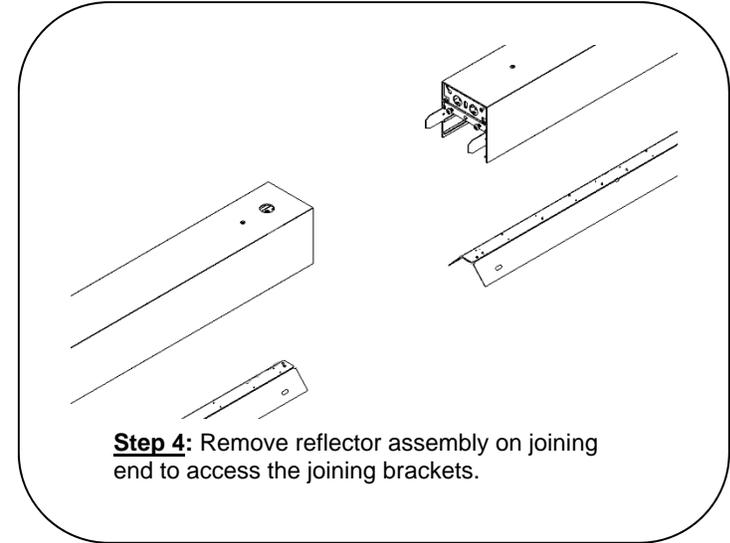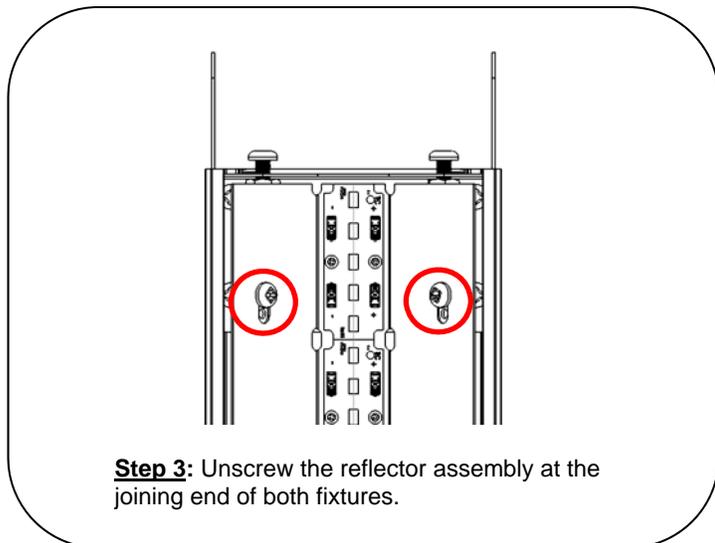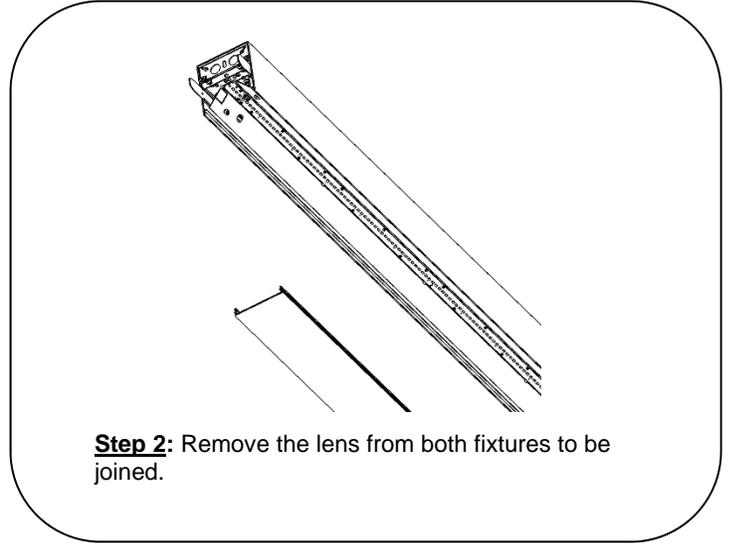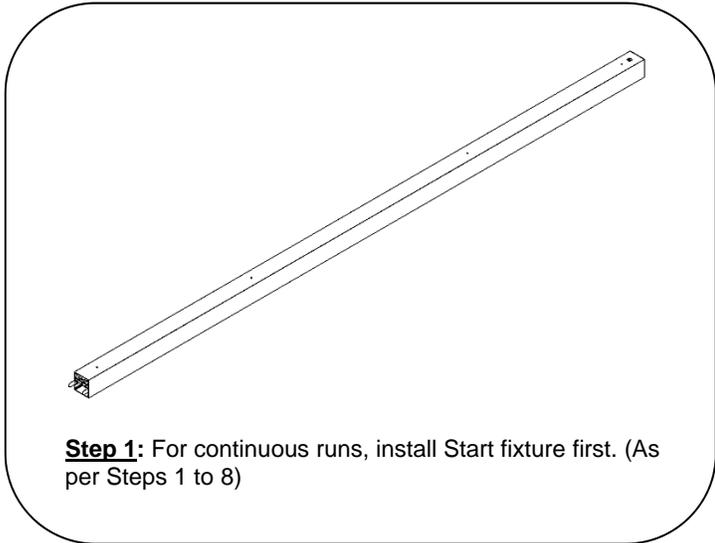

MAINTENANCE STEPS

Required Tools:




PLASTIC / LATEX GLOVES




SCREWDRIVER


Important: Use clean gloves to avoid adding oil/dirt to reflector surface. Avoid scratching reflector surface by using installation tools with soft plastic rounded edges.

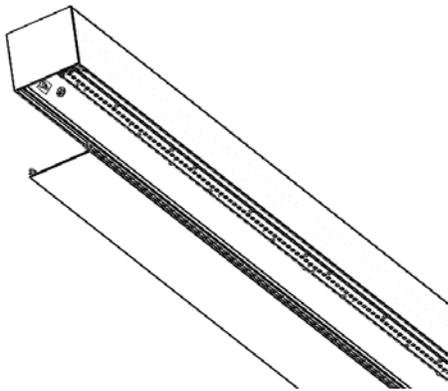


Step 1: For LED board and driver maintenance, remove the lens from the bottom of the unit. The LED boards are now accessible.

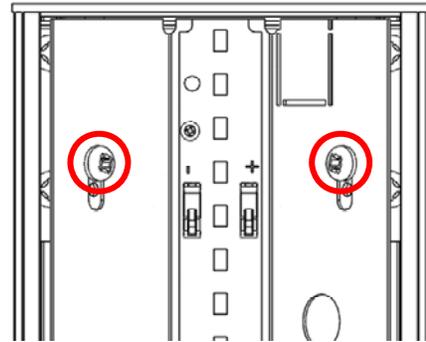

Step 2: For driver maintenance, first unscrew the reflector assembly.

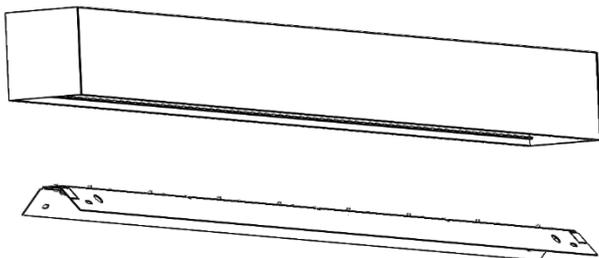

Step 3: Remove reflector assembly from unit.

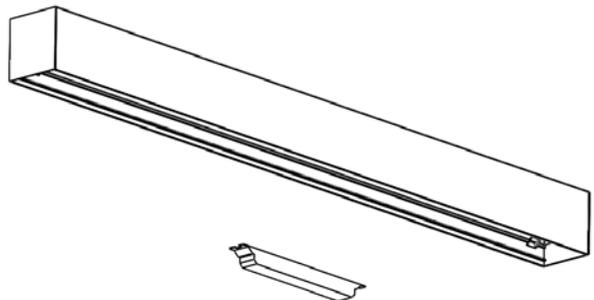

Step 4: Remove and service driver as required.