

IS-HC04-22-T rev.00

SECURESEAL RECESSED T-BAR 1X2, 2X2, 1X4 AND 2X4 INSTALLATION INSTRUCTIONS

NOTE

The following instructions provide general guidelines for product installation. These instructions apply to the 1x2, 2x2, 1X4 and 2x4 sized fixtures. For additional information consult the applicable electrical codes or contact factory directly for support before attempting anything with uncertainty.



WARNING

Risk of fire and electrical shock. **DISCONNECT POWER AT ELECTRICAL PANEL** before installing or servicing this product.

GENERAL SAFETY INSTRUCTIONS



- Read all instructions prior to installing this fixture.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- All wiring must be performed by a qualified electrician in accordance with national and local building and electrical codes.
- This fixture must be suitably grounded for your protection against shock hazards and to assure proper operation.
- Make sure that the power source conforms to the requirements of this fixture.

T-BAR CENTERS SPACING		
FIXTURE	T-BAR WIDTH	T-BAR LENGTH
1' x 2'	304.8 mm (12.0")	609.6 mm (24.0")
2' x 2'	609.9 mm (24.0")	609.6 mm (24.0")
1' x 4'	304.8 mm (12.0")	1219.2 mm (48.0")
2' x 4'	609.6 mm (24.0")	1219.2 mm (48.0")
FIXTURE FITS STANDARD T-BAR (9/16" & 15/16")		

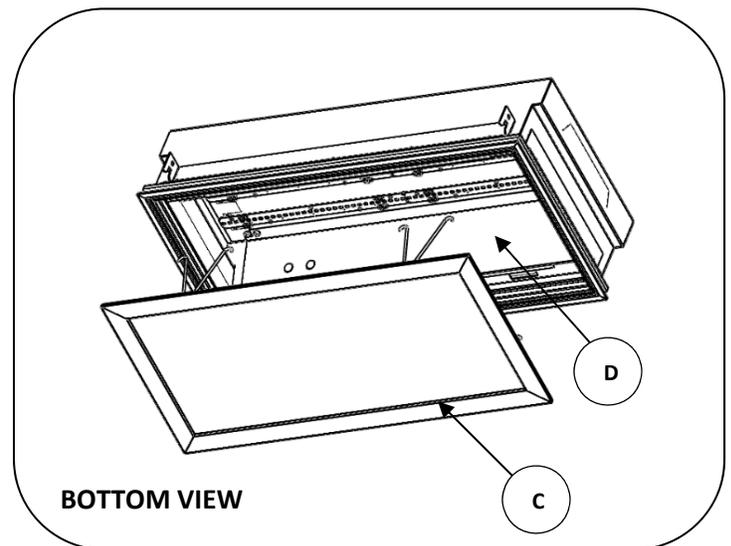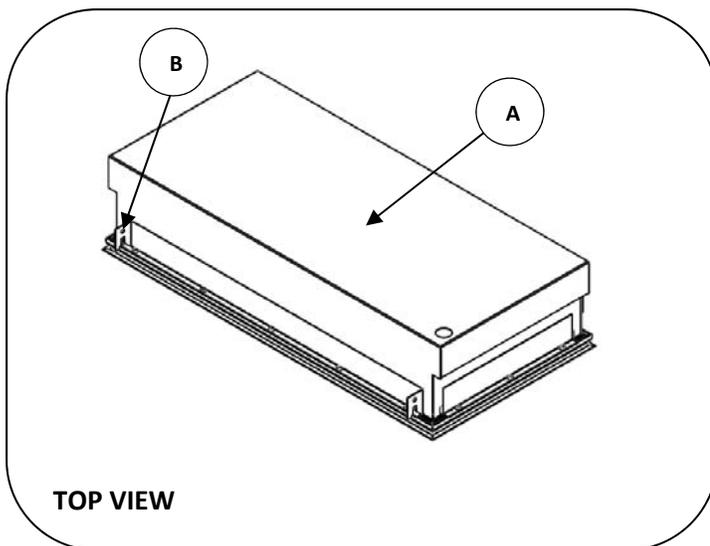



PARTS LIST: 1X2

- A. Back of Luminaire enclosure
- B. T-bar mounting bracket
- C. Door
- D. Driver access panel

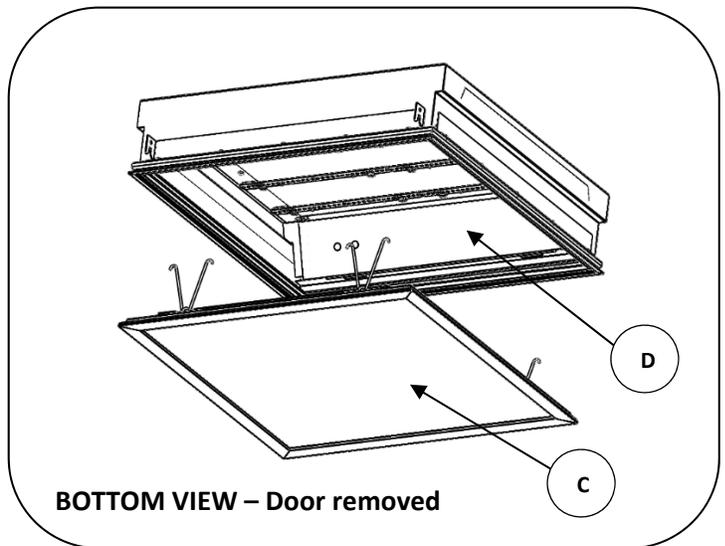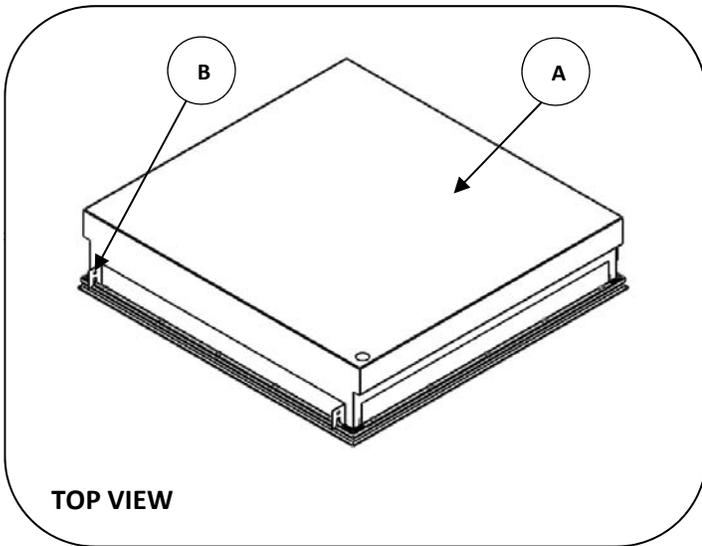



PARTS LIST: 2X2

- A. Back of Luminaire enclosure
- B. T-bar mounting bracket
- C. Door
- D. Driver access panel

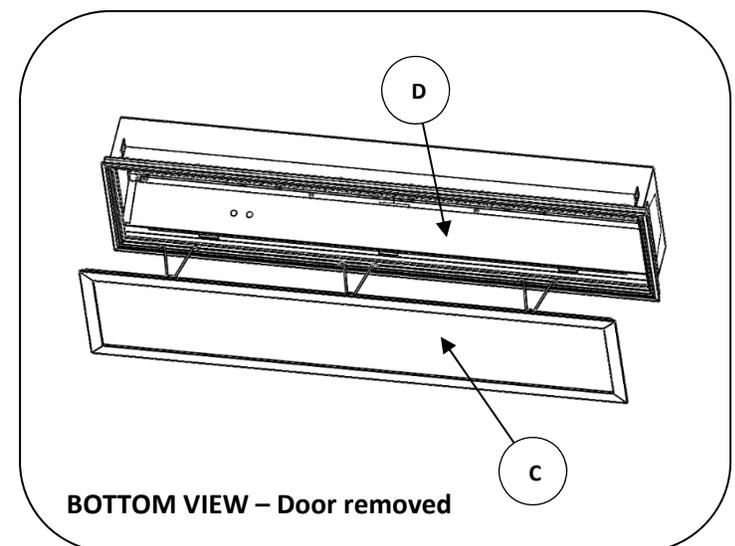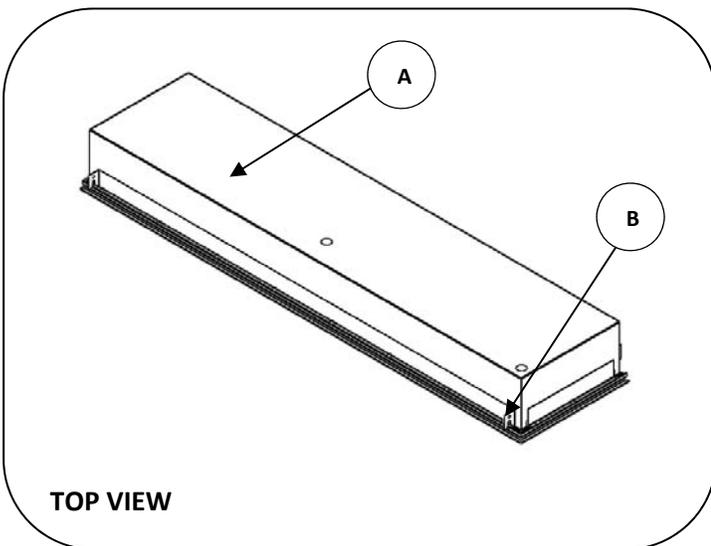



PARTS LIST: 1X4

- A. Back of Luminaire enclosure
- B. T-bar mounting bracket
- C. Door
- D. Driver access panel

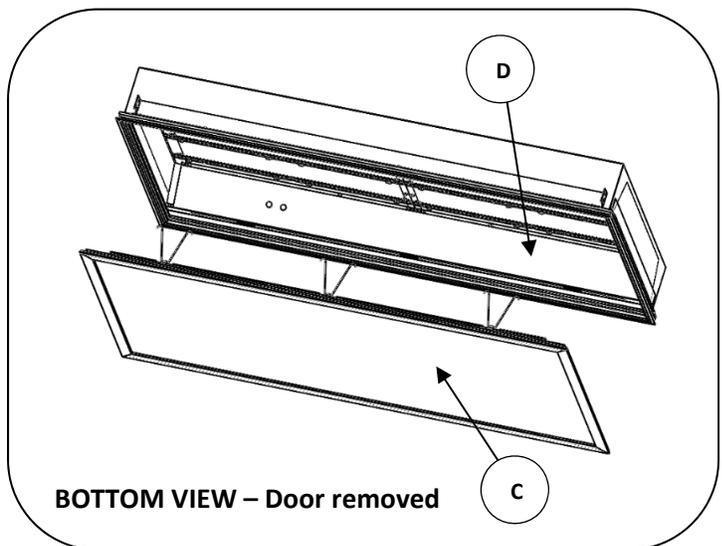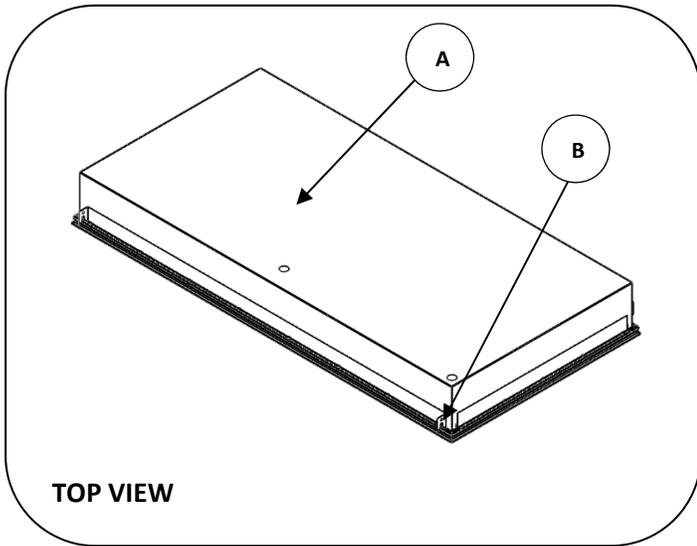


- PARTS LIST: 2X4**
- A. Back of Luminaire enclosure
 - B. T-bar mounting bracket
 - C. Door
 - D. Driver access panel


WIRING DIAGRAM

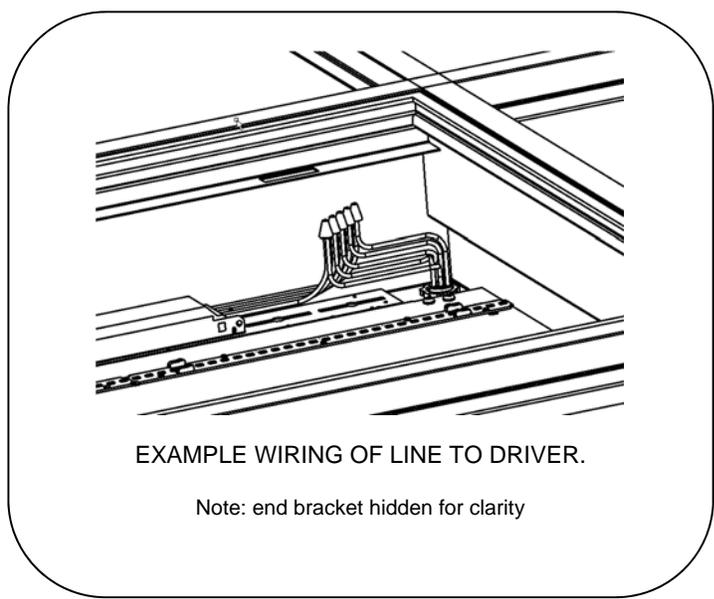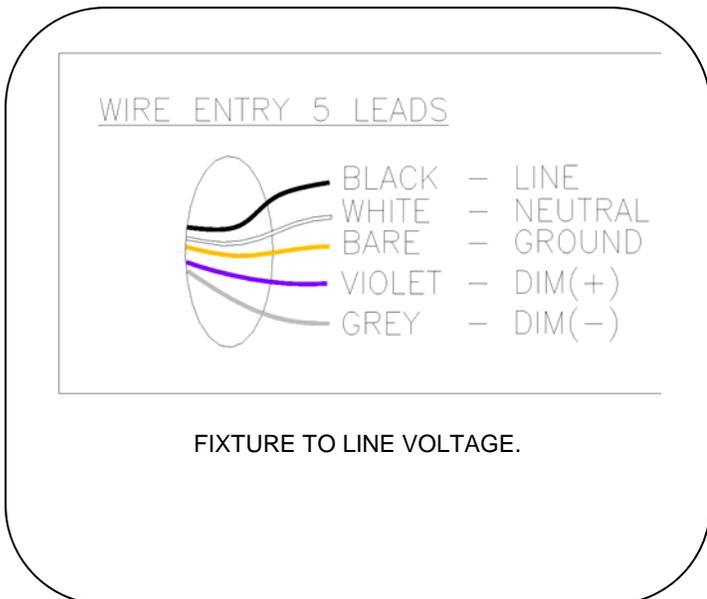


INSTALLATION STEPS

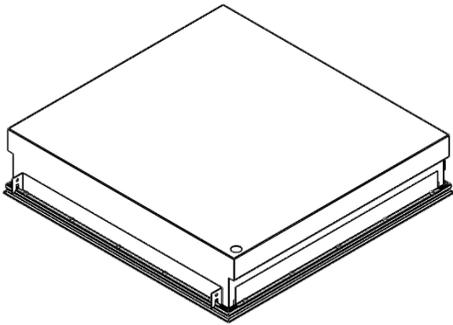


Step 1: Remove fixture and all supplied parts from packaging. **DO NOT REMOVE** the protective film from the front surface of the fixture. Fixture is shipped with T-bar brackets installed.

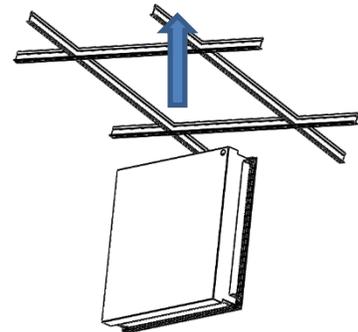


Step 2: Remove ceiling tiles (where fixture is to be installed) and adjacent tiles for easy access during installation. Install fixture into T-bar grid.

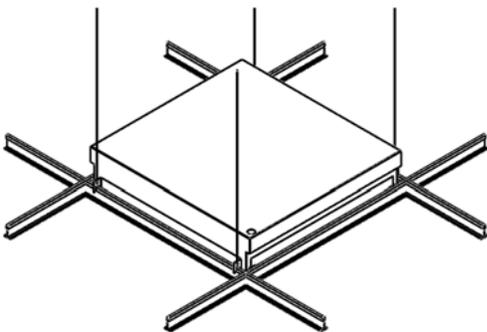


Step 3: Secure fixture to structure above by attaching security wire (supplied by others) to T-bar brackets at all mounting points.

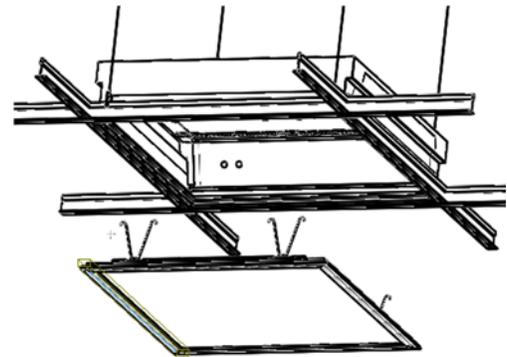

Step 4: Remove door from fixture. Pull door down and squeeze springs to release.

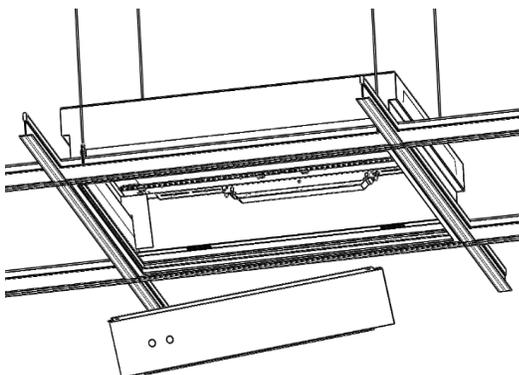


Step 5: Remove driver access panel.

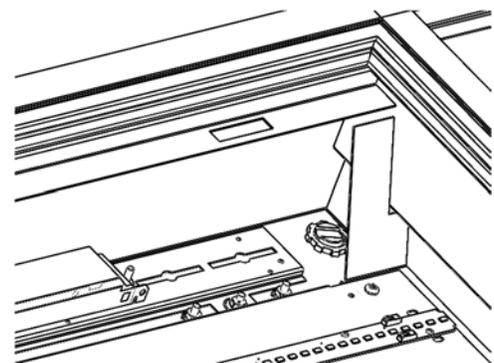

Step 6: Remove knock out and install the BX connector.

Step 7: Feed power cable through connector and connect to driver. (Refer to Wiring Diagram.)

Step 8: Reinstall driver access panel and door.

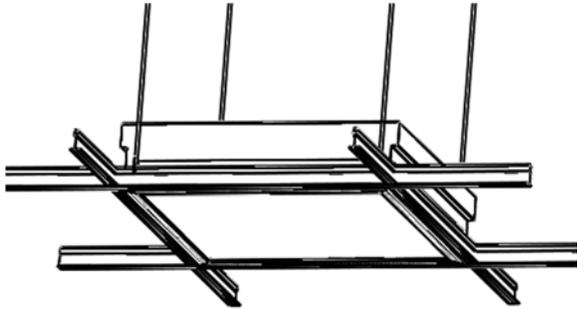

Step 9: Remove protective film from the front surface of the light fixture when installation is completed.