


ORBIT II O2DS

LED . DIRECT / INDIRECT



LEGACY

| | |
|---------------------|--------------------|
| PART #: | |
| PREP BY: | DATE: |
| PROJECT: | QTY: |
| NOTES: | |
| APPROVAL SIGNATURE: | DATE (DD/MM/YYYY): |

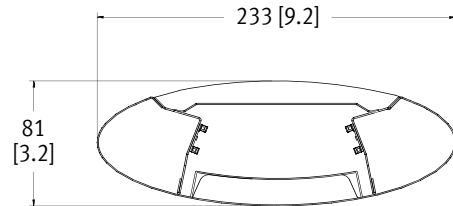

ORDERING LOGIC

Example Part Number: O2DS-2L35K-4-P-SBO-W-L3-1-PA18-1

| O2DS | | SBO | | | | | | | | | |
|--|--|--|---|---|---|---|--|---|--|----|--|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | |
| 1. SERIES O2DS | 2. COLOR TEMP 2L30K 3000K 2L35K 3500K 2L40K 4000K | 3. LENGTH 4 4 ft 8 8 ft RA Continuous Rows Replace "A" with length in feet | | 4. OPTICS UP P Perforated C Clear Dust Cover - Open Top (Leave space empty) | | 5. OPTICS DOWN SBO Solid Cross Blade Baffle w/ Opal Inlay | | | 6. FINISH W White C Custom Finish Specify RAL: | | |
| 7. LIGHT LEVEL / DRIVER L1 3123 lm L2 3983 lm L3 5704 lm L4 10932 lm | | 8. CIRCUITRY 1 1 Circuit EM Emergency/Night Light B Emergency Battery Pack | | 9. MOUNTING PAA Pendant Aircraft Cable PTA Pendant Aircraft Cable for T-bar SSA Solid Stem Replace "A" with length (inches) selected below. Select Hanger Length and Hanger Finish below | | | 10. VOLTAGE 1 120 V 2 277 V 3 347 V 4 UNV (120 - 277V) | | 11. CONTROLS / SENSORS D Daylight Sensor O Occupancy Sensor DO Daylight/Occupancy Sensor - None (leave space empty) | | |

Select Driver: ☐ Factory option 0-10V, 1% Dimming
☐ **LHE** Lutron H-Series Hi-lume 1% EcoSystem LED Driver
☐ **L5E** Lutron 5-Series EcoSystem LED Driver

Select Hanger Length:

| SOLID STEM 1/2" OD Standard | | |
|---|----------------------|-------------|
| Standard supplied length is 18" (460mm). Hangers will be supplied at closest length. All other lengths are considered custom unless otherwise stated. | | |
| Select: | Imperial (in) | Metric (mm) |
| <input type="checkbox"/> | 12 | 305 |
| <input type="checkbox"/> | 15 | 380 |
| <input type="checkbox"/> | 18 | 460 |
| <input type="checkbox"/> | 21 | 533 |
| <input type="checkbox"/> | 24 | 610 |
| <input type="checkbox"/> | 27 | 685 |
| <input type="checkbox"/> | 30 | 760 |
| <input type="checkbox"/> | 33 | 840 |
| <input type="checkbox"/> | 36 | 915 |
| <input type="checkbox"/> | 39 | 990 |
| <input type="checkbox"/> | 42 | 1067 |
| <input type="checkbox"/> | 45 | 1145 |
| <input type="checkbox"/> | 48 | 1220 |
| <input type="checkbox"/> | Custom Length: _____ | |

AIRCRAFT CABLE

Total adjustment range is 6" up & down for each standard length. All other lengths are considered custom unless otherwise stated.
If no selection is made, 48" will be supplied.

| Select: | Imperial (in) | Metric (mm) |
|--------------------------|----------------------|-------------|
| <input type="checkbox"/> | 12 | 305 |
| <input type="checkbox"/> | 18 | 460 |
| <input type="checkbox"/> | 24 | 610 |
| <input type="checkbox"/> | 30 | 760 |
| <input type="checkbox"/> | 36 | 915 |
| <input type="checkbox"/> | 42 | 1067 |
| <input type="checkbox"/> | 48 | 1220 |
| <input type="checkbox"/> | 54 | 1372 |
| <input type="checkbox"/> | 60 | 1525 |
| <input type="checkbox"/> | 72 | 1830 |
| <input type="checkbox"/> | 96 | 2440 |
| <input type="checkbox"/> | 120 | 3050 |
| <input type="checkbox"/> | 144 | 3660 |
| <input type="checkbox"/> | Custom Length: _____ | |

Select Canopy Finish:

| Select: | Canopy |
|--------------------------|-----------------------------|
| <input type="checkbox"/> | White Paint (Standard) |
| <input type="checkbox"/> | Custom Finish RAL: _____ |

Light Level Performance


| 3500K, 80 CRI, 0-10V Dimming (Standard) | | | |
|---|--------|---------|----------------|
| Light Level | Lumens | Wattage | Efficacy (LPW) |
| L1 | 3123 | 27 | 114 |
| L2 | 3983 | 35 | 114 |
| L3 | 5704 | 48 | 119 |
| L4 | 10932 | 96 | 114 |

| Lumen Adjustment Factor | | |
|-------------------------|--------|--------|
| Color Temp | 80 CRI | 90 CRI |
| 3000K | 0.984 | 0.880 |
| 3500K | 1.000 | 0.875 |
| 4000K | 1.032 | 0.879 |


Metalumen's light level performance metrics are subject to manufacturers component tolerances.

HANGER INFORMATION

AIRCRAFT CABLE

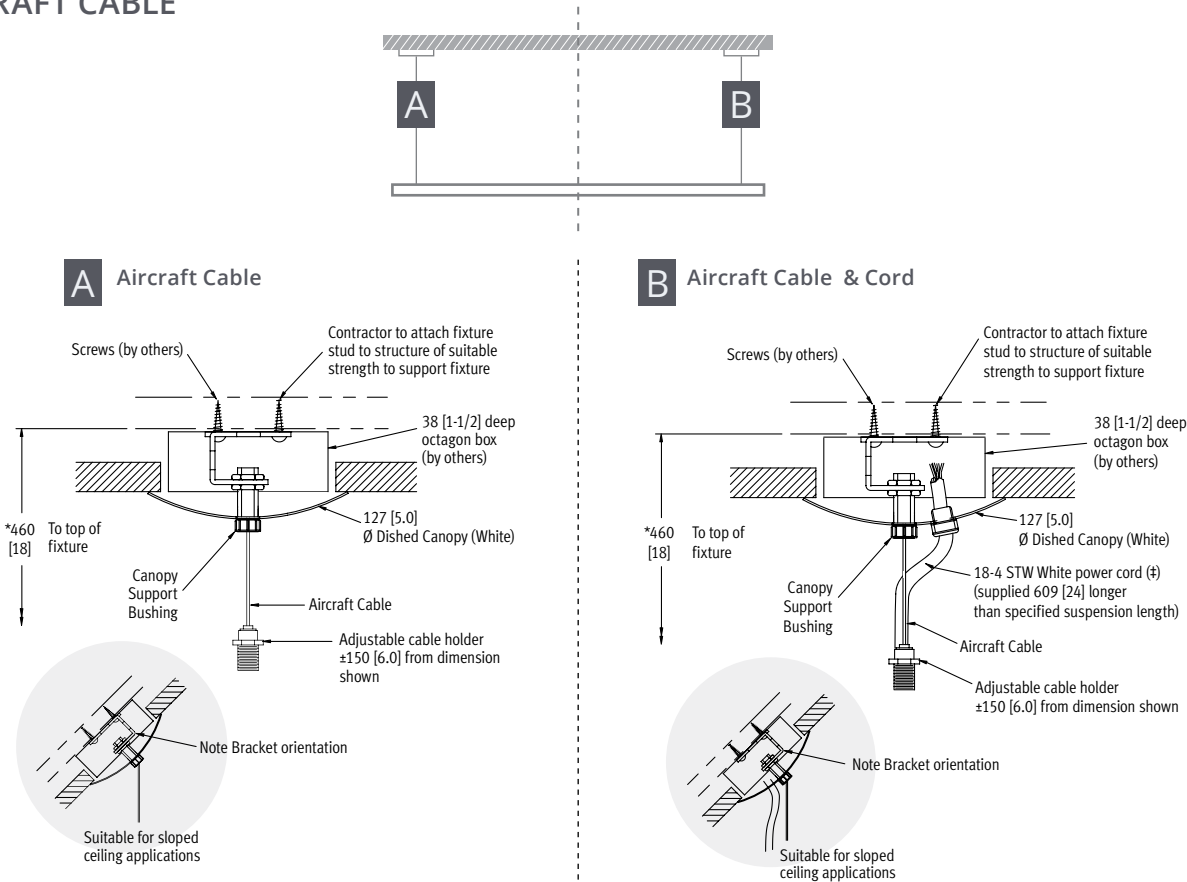

SOLID STEM

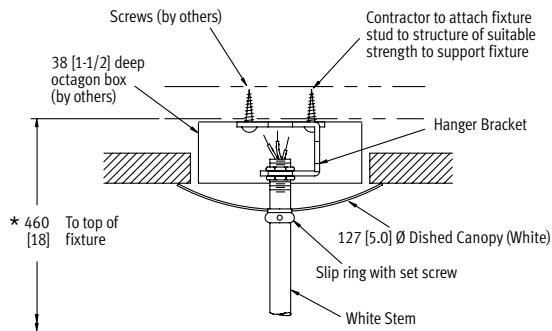

SPECIFICATIONS

Due to the Continuous Improvement Policy at Metalumen, we reserve the right to change our specifications without notice.

Housing: Precision-formed 22 gauge steel bodies with die cast end-caps allow optimal performance dust covers keeps fixtures and lamps clean.

Optical System: Metalumen luminaires are designed to utilize leading edge LED technology combined with luminaire optimized reflectors and our custom diffusers, resulting in industry leading optical performance.

CRI: 83+ for 3500K, 80 minimum for all CCTs in standard configurations.

Lumen Maintenance: Minimum 50,000h with TM-21 lumen maintenance of 85% @ 25°C ambient temperature (calculated based on IESNA LM-80-08 LED test data). L70: ≥60,000hrs.

Finish: White is the standard finish. For custom finish, contact factory.

Weight: 2.1 kg/300 mm [4.6 lb/ft]

Mounting: Aircraft cable yoke complete with a Quick-Grip field adjustable suspension system provides for quick and easy onsite alignment.

Electrical: Factory prewired with easy wire quick connect sections.

Drivers: Metalumen offers 0-10V dimming* as a standard on our entire LED product offering. Dimming range is 1%-100%. Power factor is > 90%.

Class 2 rating.

Approvals: All components are UL Recognized or Listed. RoHS compliant. cULus listed.

Environment: Suitable for dry locations.

**Standard drivers compatible with passive/sinking dimmers. Please contact Metalumen if active/sourcing dimmer support is required.*

WARRANTY

Metalumen will warrant defective luminaires for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specification. If defective, Metalumen will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Metalumen.

PHOTOMETRIC DATA - 3500K, 80 CRI

Optics Up: **Open Top**

Optics Down: **Solid Cross Blad Baffle with Opal Inlay**

IES File: **O2DS-2L35K-4-SBO-L3**

Lumens: **5704** Wattage: **48**

Efficacy: **119 LPW**

ZONAL LUMEN SUMMARY


| Zone | Lumens | %Fixt |
|--------|--------|-------|
| 0-90 | 2636 | 46 |
| 90-180 | 3066 | 54 |
| 0-180 | 5702 | 100 |

LUMINANCE DATA (CD/M2)

| Vertical Angle | Horizontal Angle | | |
|----------------|------------------|------|-------|
| | 0 | 45 | 90 |
| 45 | 5771 | 7732 | 12123 |
| 55 | 5364 | 7660 | 13958 |
| 65 | 4845 | 5943 | 12174 |
| 75 | 4162 | 3808 | 5518 |
| 85 | 3757 | 2797 | 2688 |

PHOTOMETRIC CURVE

46% Up
54% Down



Photometric performance is measured and scaled in accordance with IESNA LM-79.