


Rail 2 RM2DI (Formerly Rail)


LED . Pendant . Direct/Indirect




See p.2 for DLC Approved Products



UP: Meta Ice
DOWN: Meta Ice



UP: Meta Ice
DOWN: Meta Ice w/
Asymmetric Reflector

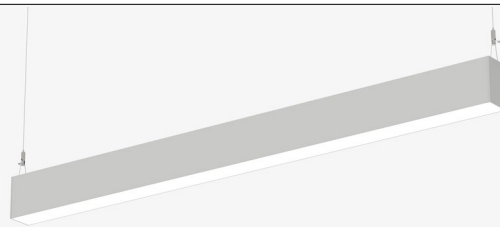

CAT #:

PREP BY:

DATE:

PROJECT:

TYPE:

NOTES:

ORDERING LOGIC

Example Part Number: RM2DI-2L35K-8L-MMA-SA-L3UD-PA-1-D-90

RM2DI																							
Series		Color Temp		Length		Pattern		Optics		Finish		LL/Driver		Circuitry		Mounting		Voltage		Controls		Options	
Color Temp				Optics				Light Level (LL) / Driver				Circuitry				Voltage							
2L30K = 3000K		90 CRI is available under Options		MBMD = Up: Meta Blanc Down: Drop Lens **				Performance at 3500K 0-10V Dimming (Standard)				1 = 1 Circuit				1 = 120 V							
2L35K = 3500K				MM = Up: Meta Ice Down: Meta Ice Up: Meta Ice								UD = Up / Down Switching				2 = 277 V							
2L40K = 4000K				MMA = Down: Meta Ice w/ Asym Reflector								EM = Emergency/Night Light				3 = 347 V							
2LTUN = 2-White Tunable (2700 - 6500K)				Meta Blanc: Opal Diffuse Lens Meta Ice: High Output Semi-Diffuse								B = Battery Pack				4 = UNV (120-277V)							
Length		Pattern		Finish				Mounting				Controls											
2 = 2 ft		8 = 8 ft		G = Square / Rectangle		SA = Satin Aluminum				PA = Pendant Aircraft Cable				PT = Pendant Aircraft Cable for T-Bar									
3 = 3 ft		9 = 9 ft		U = U-Shape		W = White				Select CABLE LENGTH and HANGER FINISH on p.2				D = Daylight Sensor									
4 = 4 ft		10 = 10 ft		L = L-Shape		C = Custom Finish Specify RAL#:								O = Occupancy Sensor									
5 = 5 ft		11 = 11 ft		C = Custom Pattern*										DO = Daylight/Occupancy Sensor									
6 = 6 ft		12 = 12 ft		Enter pattern dimensions on p.2										Options									
7 = 7 ft																							
R = Continuous Rows (Consult factory)																							
C = Custom Length (Consult factory)				_ = None (leave space empty)																			
_ = None (leave space empty)																							

* Consult factory for custom patterns, including X and T patterns. | ** Drop lens is not available with patterns.

SPECIFICATIONS

Due to the Continuous Improvement Policy at Metalumen, we reserve the right to change our specifications without notice.

Housing: Rigid extruded aluminum body, 2.3mm [0.09"] nominal wall thickness. Steel formed end caps.

Optical System: Optical System MetaLED mid flux LED technology transmits to an internal high performance-side kicking reflector that then passes through our Meta Ice acrylic diffuser for smooth distribution, creating a continuum of smooth consistent light.

CRI: 83+ for 3500K, 80 minimum for all

CCTs in standard configurations.

Lumen Maintenance: At an ambient operating temperature of 35°C the LED lifetime expectancy <= 60 000hrs at L70.

Finish: Satin Aluminum and white are standard. For custom finish, contact factory.

Mounting: Aircraft cable yoke complete with a Quick-Grip field adjustable suspension system provides for quick and easy onsite alignment.

Electrical: Factory prewired with easy wire

quick connect sections.

Drivers: Metalumen offers dimming drivers as a standard on our entire LED product offering at 0-10V. Dimming is 10%-100% range Power factor is >90% with a Class 2 rating.

Controls: Refer to Ordering Logic chart above.

Lutron Driver Options: Consult factory for Lutron driver options:

• L3DAE Hi-lume 1% EcoSystem LED Driver

• L3DA3W Hi-lume 1% 3-wire LED Driver

• L3DA2W Hi-lume 1% 2-wire LED Driver

• LDE1 Hi-lume 1% -H EcoSystem LED Driver

• LDE5 5-Series EcoSystem LED Driver

Approvals: Certified to NRTL and IES testing standards. RoHS compliant. This product is cULus listed.

Environment: Suitable for dry or damp locations.

APPROVALS Signature

Date

FILE NAME: RM2DI_LED_PA_PT_SPEC_SHEET_20180730

570 Southgate Drive, Guelph, Ontario N1G 4P6
Mailing Address: P.O. Box 1779 Guelph, Ontario, N1H 6Z9

1.800.621.6785 | T 519.822.4381 | F 519.822.4589
www.metalumen.com

Metalumen

SPECIFICATION SHEET | PAGE 1

WARRANTY

Metalumen will warrant defective luminaires for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specification. If defective, Metalumen will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Metalumen.

FEATURES



COMMERCIAL // Commercial Lighting - With over 30 years of successful architectural lighting, providing unique concept and installation solutions has become second nature. Metalumen's Start to End Development Process results in unique performance, design and architectural requirements from

concept through implementation. Metalumen's Lighting Solutions have been applied to customer projects requiring: high profile architectural installations; improved energy efficiency; retrofit installations; unique installations. Metalumen can provide top-quality innovative fixtures when and where they are needed and, at

the same time, allow the customer to determine their level of involvement in Metalumen's Start to End Development Process.



MEDILUMEN // Healthcare Lighting
Every product in our broad

line of healthcare luminaires has been strategically engineered to meet modern healthcare demands while addressing patient needs and aesthetic requirements.



DAMP Suitable for dry or damp locations.

	DLC Approved RM2DI Products	RM2DI-2L35K-4-MM-xx-L1X-X-XX-4-X	RM2DI-2L35K-8-MM-xx-L1X-X-XX-[34]-X	For more Metalumen DLC Approved Products, visit the DLC Website
		RM2DI-2L40K-4-MM-xx-L2X-X-XX-[34]-X	RM2DI-2L35K-8-MM-xx-L2X-X-XX-[34]-X	
		RM2DI-2L40K-4-MM-xx-L3X-X-XX-[34]-X	RM2DI-2L35K-8-MM-xx-L3X-X-XX-[34]-X	
			RM2DI-2L40K-8-MM-xx-L1X-X-XX-[34]-X	
			RM2DI-2L40K-8-MM-xx-L2X-X-XX-[34]-X	
			RM2DI-2L40K-8-MM-xx-L3X-X-XX-[34]-X	


PATTERNS

Select Pattern	Square (G)	Rectangle (G)	U-Shape (U)	L-Shape (L)
Pattern Configuration				
Indicate Desired Lengths (ft)	A =	A = B =	A = B = C =	A = B =
Minimum Lengths	4' for all sides		A = 3', B = 4', C = 3'	A = 3', B = 3'

Record drawings will be sent out upon order showing mounting locations.

HANGERS

Aircraft Cable & Cord

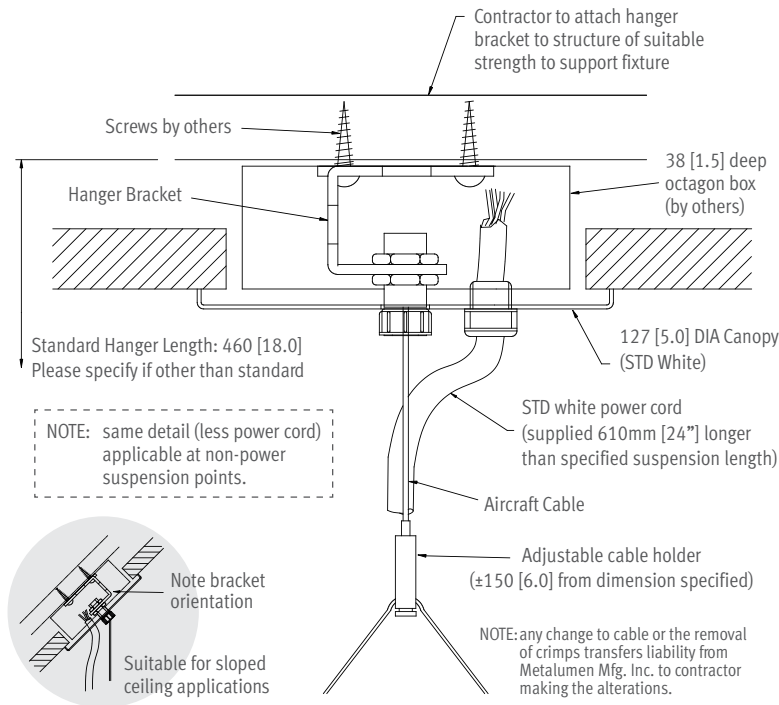


Select Cable Length and Canopy Finish:

AIRCRAFT CABLE		
Total adjustment range is 6" up & down for each standard length. All other lengths are considered custom unless otherwise stated.		
	IMPERIAL (in)	METRIC (mm)
☐	12	305
☐	18	460
☐	24	610
☐	30	760
☐	36	915
☐	42	1067
☐	48	1220
☐	54	1372
☐	60	1525
☐	72	1830
☐	96	2440
☐	120	3050
☐	144	3660
☐	Custom length:	

CANOPY FINISH	
☐	White Paint (Standard)
☐	Custom Specify RAL#:

T-Bar Aircraft Cable & Cord

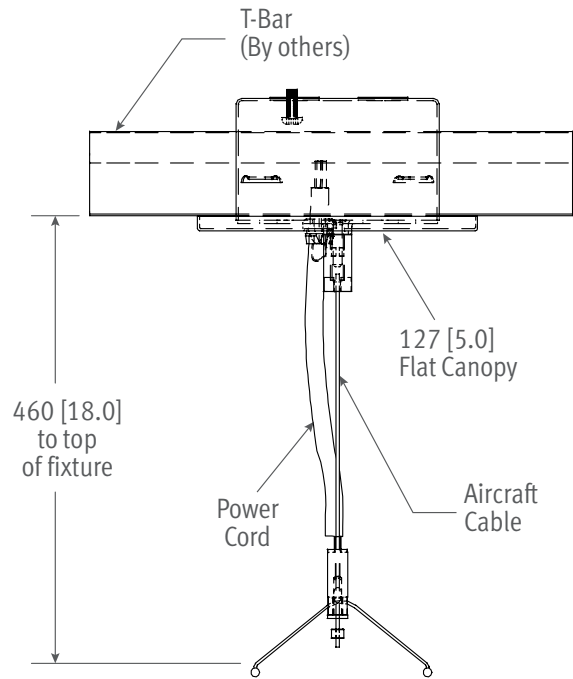

PHOTOMETRIC DATA - 3500K - L3

Optics Up: Meta Ice
Optics Down: Meta Ice


File Name: RM2DI-2L35K-4-MM-L3
Luminaire Lumens: 5616
Total Watts: 48.3
Efficacy: 116 lms/W

COEFFICIENTS OF UTILIZATION

Zonal Cavity Method | Effective Floor Cavity Reflectance = .20

RC	80				70				50			
RW	107	107	107	107	70	70	70	70	50	50	50	50
RCR												
0	107	107	107	107	98	98	98	98	82	82	82	82
1	98	93	90	86	90	86	83	80	72	70	68	68
2	89	82	76	71	82	76	71	66	64	60	57	57
3	82	72	65	60	75	67	61	56	57	52	48	48
4	75	64	57	51	69	60	53	48	51	45	41	41
5	69	57	50	44	63	53	46	41	45	40	36	36
6	63	52	44	38	58	48	41	36	41	36	31	31
7	59	47	39	33	54	43	36	32	37	32	28	28
8	54	42	35	30	50	40	33	28	34	29	25	25
9	51	39	31	26	47	36	30	25	31	26	22	22
10	47	36	29	24	44	33	27	23	29	24	20	20

PHOTOMETRIC CURVE



LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angle	0	45	90
45	10770	5143	4055	
55	9140	3541	2644	
65	7341	2174	1534	
75	4852	1025	719	
85	2039	237	159	

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angle	0	22.5	45	67.5	90
0	1228.74	1228.74	1228.74	1228.74	1228.74	
5	1189.35	1200.31	1177.54	1165.76	1163.72	
10	1167.06	1152.99	1198.18	1137.48	1181.95	
15	1112.45	1115.11	1116.29	1100.15	1106.07	
20	1047.45	1062.73	1054.99	1045.75	1055.26	
25	1000.6	1004.59	997.03	971.02	965.65	
30	928.44	917.31	910.25	885.8	883.81	
35	860.35	842.07	815.45	798.4	785.36	
40	767.16	749.91	727.16	703.3	680.19	
45	656.74	655.31	631.41	605.2	591.08	
50	569.87	552.23	529.07	495.5	486.97	
55	466.15	456.44	434.06	408.81	394.53	
60	373.8	364.15	341.59	315.2	309.11	
65	289.77	278.42	258.06	235.19	227.25	
70	199.18	199.05	181.59	164.27	160.82	
75	129.79	129	113.91	102.81	102.58	
80	69.74	68.89	59.67	53.71	52.24	
85	26.94	25.03	23.79	20.71	21.12	
90	5.18	3.72	3.35	3.74	3.65	
95	22.92	20.8	20.17	18.64	18.14	
100	67.07	66.58	64.69	60.54	56.12	
105	133.67	131.05	124.35	116.95	116.53	
110	213.67	210.3	201.19	196.84	190.43	
115	302.08	299.99	286.48	276.78	277.07	
120	402.81	399.64	388.51	378.46	369.67	
125	501.87	503.29	489.76	481.48	470.23	
130	612.01	600.97	591.68	584.27	579.34	
135	715.46	704.17	692.76	687.28	689.53	
140	810.46	811.31	807.05	803.24	797.59	
145	925.15	905.52	897.28	895.52	892.7	
150	1006.47	1006.16	997.22	978.92	988.86	
155	1089.14	1090.83	1065.8	1070.18	1090.61	
160	1131.88	1136.89	1136.34	1155.33	1143.95	
165	1196.89	1198.87	1220.74	1186.77	1222.51	
170	1237.76	1276.73	1240.7	1243.9	1249.6	
175	1261.73	1269.5	1271.88	1273.38	1261.6	
180	1303.07	1303.07	1303.07	1303.07	1303.07	

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-20	426.06	7.60
0-30	879.96	15.60
0-40	1391.8	24.70
0-60	2263.26	40.20
0-80	2644.5	47.00
0-90	2674.82	47.50
10-90	2562.11	45.50
20-40	965.74	17.20
20-50	1450.06	25.80
40-70	1127.97	20.10
60-80	381.23	6.80
70-80	124.72	2.20
80-90	30.33	0.50
90-110	164.87	2.90
90-120	453.59	8.10
90-130	892.16	15.90
90-150	1995.42	35.50
90-180	2950.69	52.50
110-180	2785.82	49.50
0-180	5625.52	100.00

Optics Up: Meta Ice
Optics Down: Meta Ice w/ Asymmetric Reflector


File Name: RM2DI-2L35K-4-MMA-L3
Luminaire Lumens: 5578
Total Watts: 48.3
Efficacy: 115 lms/W

COEFFICIENTS OF UTILIZATION

Zonal Cavity Method | Effective Floor Cavity Reflectance = .20

RC	80				70				50						
	70	107	50	30	10	70	107	50	30	10	70	107	50	30	10
RCR															
0		107	107	107	107		98	98	98	98		82	82	82	
1		98	93	90	86		90	86	83	80		72	70	68	
2		89	82	76	71		82	75	70	66		64	60	57	
3		81	72	65	59		75	67	60	55		56	52	48	
4		74	64	56	50		68	59	52	47		50	45	41	
5		68	57	49	43		63	53	46	41		45	40	35	
6		63	51	43	38		58	48	40	35		41	35	31	
7		58	46	38	33		54	43	36	31		37	31	27	
8		54	42	34	29		50	39	32	28		34	28	24	
9		50	38	31	26		46	36	29	25		31	25	22	
10		47	35	28	23		43	33	26	22		28	23	20	

PHOTOMETRIC CURVE



LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angle	0	45	90
45	2995	3763	8329	
55	2079	2705	7058	
65	1272	1780	5642	
75	658	873	3804	
85	166	210	1423	

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angle	0	22.5	45	67.5	90
0	1138.31	1138.31	1138.31	1138.31	1138.31	
5	1079.55	1086.06	1062.18	1087.11	1109.73	
10	1017.68	1011.16	1017.24	1053.82	1089.27	
15	934.14	935.02	974.7	1032.78	1048.44	
20	887.28	883.99	905.47	935.87	996.77	
25	794.18	818.91	838.05	880.15	956.71	
30	715.79	730.06	758.33	827.13	877.5	
35	644.97	649.87	695.83	758.43	822.32	
40	554.6	570.03	608.9	653.03	737.38	
45	487.15	493.05	528.63	582.25	656.1	
50	417.3	425.95	454.5	508.41	570.53	
55	339.03	344.61	371.67	409.68	465.08	
60	268.34	276.43	301.44	337.39	382.22	
65	201.72	211.45	231.54	255.93	287.84	
70	143.9	152.83	160.31	187.1	204.88	
75	98.21	97.21	103.77	114.46	131.55	
80	52.74	55.36	58.13	62.39	70	
85	22.51	21.57	21.87	25.09	24.34	
90	3.63	4.04	3.62	3.93	5.89	
95	22.86	24.5	27.38	31.18	31.98	
100	67.28	69.07	75.54	79.91	80.01	
105	128.46	134.26	138.84	150.06	153.49	
110	201.04	205.22	222.84	235.84	238.86	
115	285.43	296.02	307.96	326.62	328.67	
120	371.49	391.81	403.82	419.95	428	
125	463.65	480.91	507.72	533.64	532.26	
130	578.88	596.94	609.99	624.49	631.36	
135	685.1	681.87	712.52	734.76	724.86	
140	788.96	792.76	799.36	821.21	824.75	
145	894.41	891.09	901.98	919.21	892.69	
150	968.26	973.27	973.69	1002.96	986.66	
155	1043.87	1056.06	1040.26	1058.43	1063.57	
160	1106.72	1092.06	1124.16	1126.38	1119.27	
165	1136.05	1144.33	1179.08	1151.26	1149.53	
170	1201.43	1177.53	1203.3	1192.02	1182.36	
175	1149.1	1247.01	1214.79	1214.26	1237.13	
180	1250.15	1250.15	1250.15	1250.15	1250.15	

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-20	398.52	7.10
0-30	831.06	14.90
0-40	1330.57	23.80
0-60	2214.77	39.60
0-80	2612.32	46.80
0-90	2642.1	47.30
10-90	2537.21	45.40
20-40	932.05	16.70
20-50	1416.91	25.40
40-70	1152.56	20.60
60-80	397.54	7.10
70-80	129.19	2.30
80-90	29.79	0.50
90-110	185.47	3.30
90-120	488.96	8.80
90-130	935.03	16.70
90-150	2028.32	36.30
90-180	2945.12	52.70
110-180	2759.65	49.40
0-180	5587.22	100.00

PHOTOMETRIC DATA - 3500K - L3

Optics Up: Meta Blanc
Optics Down: Drop Lens


File Name: RM2DI-2L35K-4-MBMD-L3
Luminaire Lumens: 5088
Total Watts: 48.3
Efficacy: 105 lms/W

COEFFICIENTS OF UTILIZATION

Zonal Cavity Method | Effective Floor Cavity Reflectance = .20

RC	80				70				50			
RW	70	50	30	10	70	50	30	10	50	30	10	10
RCR	106	106	106	106	97	97	97	97	81	81	81	81
0	96	92	88	84	88	84	81	78	70	68	65	
1	88	80	74	69	80	74	68	64	61	58	54	
2	80	71	63	57	73	65	59	53	54	50	46	
3	73	63	55	49	67	58	51	45	48	43	39	
4	67	56	48	42	61	51	44	39	43	38	34	
5	62	50	42	36	57	46	39	34	39	34	29	
6	57	45	37	32	52	42	35	30	35	30	26	
7	53	41	33	28	49	38	31	26	32	27	23	
8	50	37	30	25	45	35	28	24	30	24	21	
9	46	34	27	22	42	32	26	21	27	22	19	
10												

PHOTOMETRIC CURVE



LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angle		
	0	45	90
45	7978	3639	3026
55	6725	2691	2264
65	5152	1856	1578
75	3288	1211	1056
85	1595	704	665

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	932.34	932.34	932.34	932.34	932.34
5	933.86	923.88	955.25	934.76	930.56
10	906.01	915.41	923.89	908.45	911.58
15	901.64	891.48	877.49	866.36	858.64
20	829.18	833.86	828.28	813.28	830.62
25	787.47	777.03	775.88	766.53	754.45
30	731.06	721.84	710.7	696.57	682.82
35	654.42	652.04	632.33	634.44	620.37
40	582.21	582.13	566.64	560.04	563.04
45	493.02	498.25	494.32	499.87	494.45
50	423.53	425.74	428.78	433.57	447.73
55	349.5	353.55	370.69	379.06	384.07
60	276.78	292.41	309.19	327.67	322.17
65	209.02	222.45	251.38	273.85	269.41
70	147.12	166.7	199.54	223.19	222.62
75	91.85	118.1	156.32	174.2	175.94
80	50.1	77.76	113.94	130.44	137.24
85	23.05	48.66	83.64	102.76	104.81
90	7.84	32.58	66.74	81.88	87.38
95	25.7	45.15	73.68	88.69	90.01
100	61.9	81.54	108.42	115.9	116.91
105	122.05	139.79	154.16	167.99	171.75
110	193.13	203.28	226.26	224.37	226.75
115	265.5	284.15	297.5	303.26	298.53
120	355.78	364.74	378.3	385.7	378.84
125	444.16	460.14	471.46	467.12	458.31
130	539.2	546.56	555.46	556.32	552.65
135	631.91	637.45	645.27	651.73	652.46
140	718.81	727.74	731.51	733.41	738.44
145	811.44	818.8	823.15	817.46	809.42
150	888.79	889.55	891.73	902.86	892.11
155	964.4	966.85	949.12	963.69	974.68
160	1024.86	1009.23	1011.41	1020.5	1026.63
165	1084.43	1066.07	1071.74	1070.79	1056.67
170	1113.78	1111.29	1091.9	1111.14	1111.51
175	1126.87	1145.9	1127.44	1142.52	1178.63
180	1135.54	1135.54	1135.54	1135.54	1135.54

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-20	335.44	6.60
0-30	690.64	13.60
0-40	1090.93	21.40
0-60	1805.45	35.40
0-80	2207.04	43.30
0-90	2291.72	45.00
10-90	2203.18	43.20
20-40	755.49	14.80
20-50	1140.45	22.40
40-70	960.67	18.90
60-80	401.59	7.90
70-80	155.44	3.10
80-90	84.69	1.70
90-110	242.11	4.80
90-120	532.50	10.50
90-130	946.24	18.60
90-150	1952.46	38.30
90-180	2803.64	55.00
0-180	5095.36	100.00