
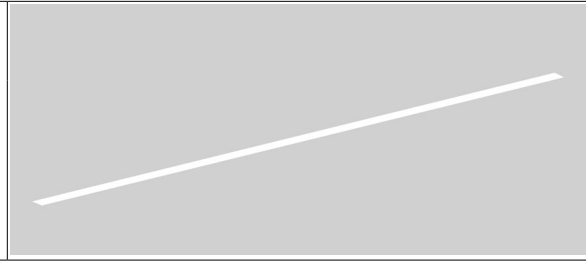


Rail 1 RML (Formerly Caledonia)

LED . Recessed

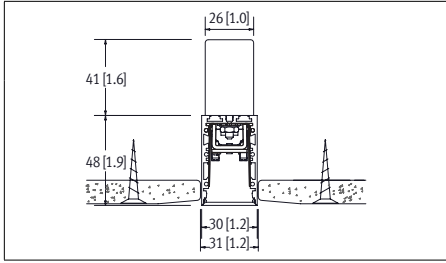

CAT #:
PREP BY:
DATE:
PROJECT:
TYPE:
NOTES:

ORDERING LOGIC

Example Part Number: RML-1L35K-12-MC-W-L31-DF-1-90

RML			Optics					DF																															
Series	Color Temp	Length / Pattern	Up	Down	Finish	LL/Driver	Circuitry	Mounting	Voltage	Controls	Options																												
Color Temp	Length / Pattern	Optics Up	Light Level (LL) / Driver				Circuitry	Controls																															
1L30K = 3000K	4 = 4 ft	- = None (leave space empty)	<table border="1"> <thead> <tr> <th colspan="4">Fixture Lumens</th> </tr> <tr> <th colspan="4">*Light level measured at 3500K.</th> </tr> <tr> <th>0-10V Dimming (Standard)</th> <th>Lumens Delivered</th> <th>Wattage</th> <th>Efficacy (LPW)</th> </tr> </thead> <tbody> <tr> <td>L1</td> <td>1280</td> <td>13.8</td> <td>92</td> </tr> <tr> <td>L2</td> <td>1578</td> <td>17.6</td> <td>89</td> </tr> <tr> <td>L3</td> <td>2108</td> <td>24.2</td> <td>87</td> </tr> <tr> <td>L4</td> <td>3882</td> <td>48.3</td> <td>80</td> </tr> </tbody> </table>				Fixture Lumens				*Light level measured at 3500K.				0-10V Dimming (Standard)	Lumens Delivered	Wattage	Efficacy (LPW)	L1	1280	13.8	92	L2	1578	17.6	89	L3	2108	24.2	87	L4	3882	48.3	80	1 = 1 Circuit	- = None (leave space empty)			
Fixture Lumens																																							
*Light level measured at 3500K.																																							
0-10V Dimming (Standard)	Lumens Delivered	Wattage	Efficacy (LPW)																																				
L1	1280	13.8	92																																				
L2	1578	17.6	89																																				
L3	2108	24.2	87																																				
L4	3882	48.3	80																																				
1L35K = 3500K	8 = 8 ft	Optics Down	<table border="1"> <thead> <tr> <th colspan="3">Lumen Adjustment Factor</th> </tr> <tr> <th>Color Temp</th> <th>80 CRI</th> <th>90 CRI</th> </tr> </thead> <tbody> <tr> <td>3000K</td> <td>0.984</td> <td>0.873</td> </tr> <tr> <td>3500K</td> <td>1.000</td> <td>0.875</td> </tr> <tr> <td>4000K</td> <td>1.032</td> <td>0.879</td> </tr> </tbody> </table>				Lumen Adjustment Factor			Color Temp	80 CRI	90 CRI	3000K	0.984	0.873	3500K	1.000	0.875	4000K	1.032	0.879	B = Battery Pack (remote mounted)	Options																
Lumen Adjustment Factor																																							
Color Temp	80 CRI	90 CRI																																					
3000K	0.984	0.873																																					
3500K	1.000	0.875																																					
4000K	1.032	0.879																																					
1L40K = 4000K	12 = 12 ft	MC = Meta Cloud	<p>Based on 4ft sections. *All drivers remote mounted</p>				Mounting	90 = 90 CRI																															
	R = Continuous Rows Consult factory	Finish					DF = Recessed Drywall Flangeless	- = None (leave space empty)																															
	G = Square / Rectangle	SA = Satin Aluminum					Voltage																																
	U = U-Shape	W = White					1 = 120 V																																
	L = L-Shape	C = Custom Finish Specify RAL#:					2 = 277 V																																
	C = Custom Pattern*						3 = 347 V																																
	Enter pattern dimensions on page 2						4 = UNV (120 - 277 V)																																
							For other voltage, consult factory																																

* Consult factory for custom patterns, including X and T patterns.

SPECIFICATIONS

Due to the Continuous Improvement Policy at Metalumen, we reserve the right to change our specifications without notice.

Housing: Anodized Extruded Aluminum 65% post-industrial recycled content with a 20 Gauge steel die cast onboard hangers, complete with die cast zinc alloy powder coated end caps.

Optical System: Computer modeled, formed painted steel materials are utilized to provide wide, horizontal direct distribution.

CRI: 83 (3500K) (80 minimum)

Lumen Maintenance: At an ambient operating temperature of 35°C the LED lifetime expectancy <= 60 000hrs at L70.

Finish: Satin Aluminum and white are standard options. For custom finish, contact factory.

Weight: 1.0lb/ft or 0.5kg/300mm.

Mounting: Mounting brackets/clips provided.

Drivers: Metalumen offers dimming drivers

as a standard on our entire LED product offering at 0-10V. Dimming is 10%-100% range Power factor is <90% with a Class 2 rating. All drivers remote mounted.

Lutron Driver Options: Consult factory for Lutron driver options:

- L3DAE Hi-lume 1% EcoSystem LED Driver
- L3DA3W Hi-lume 1% 3-wire LED Driver
- LTEA2W Hi-lume 1% 2-wire LED Driver
- LDE1 Hi-lume 1% -H EcoSystem LED Driver

• **LDE5** 5-Series EcoSystem LED Driver
Approvals: Certified to NRTL and IES testing standards. All components are UL Recognized or Listed. RoHS compliant.
Environment: Suitable for dry or damp indoor locations.

WARRANTY

Metalumen will warrant defective luminaires for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specification. If defective, Metalumen will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Metalumen.

APPROVALS

Signature _____

Date _____

FILE NAME: RML_DF_SPEC_SHEET

20180320

570 Southgate Drive, Guelph, Ontario N1G 4P6
Mailing Address: P.O. Box 1779 Guelph, Ontario, N1H 6Z9

1.800.621.6785 | T 519.822.4381 | F 519.822.4589
www.metalumen.com

Metalumen

FEATURES

COMMERCIAL // Commercial Lighting - With over 30 years of successful architectural lighting, providing unique concept and installation solutions has become second nature. Metalumen's Start to End Development Process results in unique performance, design and architectural requirements from concept through implementation. Metalumen's Lighting Solutions have been applied to customer projects requiring: high profile architectural installations; improved energy efficiency; retrofit installations; unique installations. Metalumen can provide top-quality innovative fixtures when and where they are needed and, at the same time, allow the customer to determine their

level of involvement in Metalumen's Start to End Development Process.

EDULUMEN // Educational Lighting Edulumen is a collection of premium luminaires that maximize both the functionality and performance of any educational facility. Based on maximum efficiency, integration of controls and exceptional design, Edulumen will earn high marks for meeting your requirements. Students challenge themselves throughout the day to achieve, and Metalumen is dedicated to this by creating sustainable environments that foster enhanced educational experiences.

MEDILUMEN // Healthcare Lighting Every product in our broad line of healthcare luminaires has been strategically engineered to meet modern healthcare demands while addressing patient needs and aesthetic requirements.

META ICE META ICE is a smooth Continuum Optical System with a 91% transmission rate that creates smooth subduced lighting with no source imagery. Meta Ice is a premium lensing optic unique to Metalumen but coupled with a high performance side kicking specular reflector to maximize the lumens from the source creating an unparallelled lumen delivery.

META ICE META ICE is a smooth Continuum Optical System with a 91% transmission rate that creates smooth subduced lighting with no source imagery. Meta Ice is a premium lensing optic unique to Metalumen but coupled with a high performance side kicking specular reflector to maximize the lumens from the source creating an unparallelled lumen delivery.

META LED boards with a raw efficacy of over 120lm/W, proprietary to Metalumen. A slim LED platform for any of your LED linear application.

PATTERNS

Select Pattern	Square (G)	Rectangle (G)	U-Shape (U)	L-Shape (L)
Pattern Configuration				
Indicate Desired Lengths (ft)	A =	A = B =	A = B = C =	A = B =
Minimum Lengths	4' for all sides		A = 3', B = 4', C = 3'	A = 3', B = 3'

Record drawings will be sent out upon order showing mounting locations.

PHOTOMETRIC DATA - 3500K


File Name: RML-1L35K-4-MC-L3
Luminaire Lumens: 2108
Total Watts: 24.2
Efficacy: 87 lms/W
Optics Up: None
Optics Down: Meta Ice

COEFFICIENTS OF UTILIZATION

Zonal Cavity Method | Effective Floor Cavity Reflectance = .20

RC RW	80			70			50		
	70	50	30	70	50	30	50	30	10
0	119	119	119	116	116	116	111	111	111
1	110	106	102	99	104	100	97	100	97
2	101	94	88	83	99	92	87	82	89
3	93	84	76	71	91	82	75	70	79
4	86	75	67	61	84	74	66	61	71
5	80	68	60	54	78	67	59	53	65
6	74	62	53	47	72	61	53	47	59
7	69	56	48	42	67	56	48	42	54
8	65	52	44	38	63	51	44	38	50
9	60	48	40	35	59	47	40	35	46
10	57	44	37	32	56	44	37	32	43

PHOTOMETRIC CURVE



LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angle		
	0	45	90
45	20944	8413	6170
55	17284	5707	3942
65	13923	3400	2161
75	9716	1538	930
85	4415	251	142

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1093.56	1093.56	1093.56	1093.56	1093.56
5	1073.75	1072.5	1053.04	1048.58	1073.76
10	1052.87	1051.05	1030.63	1016.15	1012
15	992.33	991.9	985.01	955.83	937.07
20	950.71	929.92	893.99	868.22	870.58
25	886.96	859.88	822.78	782.09	764.22
30	814.97	784.78	740.08	692.76	673.11
35	735.91	700.05	645.9	594.7	583.57
40	640.54	619.64	553.2	506.18	496.77
45	560.26	530.37	469.9	430.17	415.27
50	476.81	444.78	389.8	353.3	335.93
55	381.23	362.17	318.26	283.23	272.11
60	306.71	282.55	247.82	219.4	209.51
65	232.4	214.21	183.6	158.25	148.41
70	163.26	151.24	128.01	108.46	104.24
75	105.13	95.36	77.79	64.86	61.6
80	54.75	49.36	37.19	32.11	29.44
85	20.4	17.14	11.47	8.87	8.77
90	4.44	2.24	1.03	.88	.85

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-20	374.28	17.70
0-30	752.82	35.60
0-40	1159.79	54.90
0-60	1819.67	86.10
0-80	2093.88	99.10
0-90	2112.37	100.00
10-90	2011.67	95.20
20-40	785.52	37.20
20-50	1155.79	54.70
40-70	846.76	40.10
60-80	274.21	13.00
70-80	87.33	4.10
80-90	18.49	0.90
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	2112.37	100.00