


Rail 6 S6 (Formerly Sequence)

LED . Pendant



DLC Applicable only to Meta Ice Optics

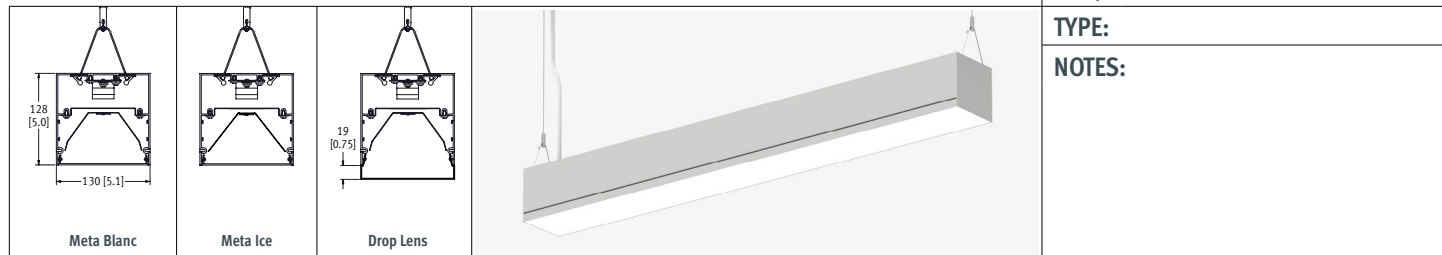

CAT #:

PREP BY:

DATE:

PROJECT:

TYPE:

NOTES:

ORDERING LOGIC

Example Part Number: S6-1L35K-8-MB-W-L31-PA-1-D-90

S6				Optics																																																																															
Series	Color Temp	Length	Pattern	Up	Down	Finish	LL/Driver	Circuitry	Mounting	Voltage	Controls	Options																																																																							
Color Temp				Optics Up		Light Level (LL) / Driver			Circuitry		Voltage																																																																								
1L30K = 3000K				_ = None (leave space empty)		Performance at 3500K 0-10V Dimming (Standard) <table><tr><th>Optics</th><th>Light Level</th><th>Lumens Delivered</th><th>Wattage</th><th>Efficacy (LPW)</th></tr><tr><td rowspan="4">MB</td><td>L1</td><td>1479</td><td>13.8</td><td>107</td></tr><tr><td>L2</td><td>1824</td><td>17.6</td><td>104</td></tr><tr><td>L3</td><td>2435</td><td>24.2</td><td>101</td></tr><tr><td>L4</td><td>4483</td><td>49.9</td><td>90</td></tr><tr><td rowspan="4">M</td><td>L1</td><td>1730</td><td>13.8</td><td>125</td></tr><tr><td>L2</td><td>2133</td><td>17.6</td><td>121</td></tr><tr><td>L3</td><td>2850</td><td>24.2</td><td>118</td></tr><tr><td>L4</td><td>5248</td><td>49.8</td><td>105</td></tr><tr><td rowspan="4">MD</td><td>L1</td><td>1509</td><td>14.0</td><td>108</td></tr><tr><td>L2</td><td>1888</td><td>17.7</td><td>107</td></tr><tr><td>L3</td><td>2567</td><td>24.2</td><td>106</td></tr><tr><td>L4</td><td>4762</td><td>49.9</td><td>95.4</td></tr></table> Based on 4ft sections. <table><tr><th colspan="3">Lumen Adjustment Factor</th></tr><tr><th>Color Temp</th><th>80 CRI</th><th>90 CRI</th></tr><tr><td>3000K</td><td>0.984</td><td>0.873</td></tr><tr><td>3500K</td><td>1.000</td><td>0.875</td></tr><tr><td>4000K</td><td>1.032</td><td>0.879</td></tr></table>			Optics	Light Level	Lumens Delivered	Wattage	Efficacy (LPW)	MB	L1	1479	13.8	107	L2	1824	17.6	104	L3	2435	24.2	101	L4	4483	49.9	90	M	L1	1730	13.8	125	L2	2133	17.6	121	L3	2850	24.2	118	L4	5248	49.8	105	MD	L1	1509	14.0	108	L2	1888	17.7	107	L3	2567	24.2	106	L4	4762	49.9	95.4	Lumen Adjustment Factor			Color Temp	80 CRI	90 CRI	3000K	0.984	0.873	3500K	1.000	0.875	4000K	1.032	0.879	1 = 1 Circuit		1 = 120 V	
Optics	Light Level	Lumens Delivered	Wattage	Efficacy (LPW)																																																																															
MB	L1	1479	13.8	107																																																																															
	L2	1824	17.6	104																																																																															
	L3	2435	24.2	101																																																																															
	L4	4483	49.9	90																																																																															
M	L1	1730	13.8	125																																																																															
	L2	2133	17.6	121																																																																															
	L3	2850	24.2	118																																																																															
	L4	5248	49.8	105																																																																															
MD	L1	1509	14.0	108																																																																															
	L2	1888	17.7	107																																																																															
	L3	2567	24.2	106																																																																															
	L4	4762	49.9	95.4																																																																															
Lumen Adjustment Factor																																																																																			
Color Temp	80 CRI	90 CRI																																																																																	
3000K	0.984	0.873																																																																																	
3500K	1.000	0.875																																																																																	
4000K	1.032	0.879																																																																																	
1L35K = 3500K				Optics Down		EM = Emergency / Night Light			2 = 277 V																																																																										
1L40K = 4000K				MB = Meta Blanc		B = Battery Pack			3 = 347 V																																																																										
1LTUN = 2-White Tunable (2700 - 6500K)				M = Meta Ice		Mounting PA = Pendant Aircraft Cable PT = Pendant Aircraft Cable for T-Bar Select HANGER LENGTH and HANGER FINISH on p.3			4 = UNV (120 - 277 V)																																																																										
Length		Pattern		MD = Drop Lens**					Controls																																																																										
2 = 2 ft	8 = 8 ft	G = Square / Rectangle	Finish		_ = None (leave space empty)																																																																														
3 = 3 ft	9 = 9 ft	U = U-Shape	SA = Satin Aluminum		D = Daylight Sensor																																																																														
4 = 4 ft	10 = 10 ft	L = L-Shape	W = White		O = Occupancy Sensor																																																																														
5 = 5 ft	11 = 11 ft	C = Custom Pattern*	C = Custom Finish Specify RAL#:		DO = Daylight/Occupancy Sensor																																																																														
6 = 6 ft	12 = 12 ft	Enter pattern dimensions on p.2			Options																																																																														
7 = 7 ft					90 = 90 CRI																																																																														
R = Continuous Rows (See p.3)						_ = None (leave space empty)																																																																													
C = Custom Length (Consult factory)		_ = None (leave space empty)																																																																																	
_ = None (leave space empty)																																																																																			

* Consult factory for custom patterns, including X and T patterns. | ** Drop lens is not available with patterns.

SPECIFICATIONS

Due to the Continuous Improvement Policy at Metalumen, we reserve the right to change our specifications without notice.

Housing: Rigid extruded aluminum body, 2.0mm (0.08") nominal wall thickness, and steel formed end caps.

Optical System: Optical System MetaLED mid flux LED technology transmits to an internal high performance-side kicking reflector that then passes through our Meta Blanc or Meta Ice acrylic diffuser for smooth distribution, creating a continuation of smooth consistent light.

CRI: 83+ for 3500K, 80 minimum for all CCTs in standard configurations.

Lumen Maintenance: At an ambient operating temperature of 35°C, the LED lifetime expectancy > 60 000hrs at L85.

Finish: Satin aluminum and white are standard finishes. For custom finish, contact factory.

Weight: 1.7 kg/300mm [3.8 lb/ft]

Mounting: Aircraft cable yoke complete with a Quick-Grip field adjustable suspension system provides for quick and easy on-site alignment.

Electrical: Factory prewired with easy wire

quick connect sections.

Drivers: Metalumen offers dimming drivers as a standard on our entire LED product offering at 0-10V. Dimming is 10%-100% range Power factor is >90% with a Class 2 rating.

Controls: Refer to Ordering Logic chart above.

Lutron Driver Options: Consult factory for Lutron driver options:

- L3DAE Hi-lume 1% EcoSystem LED Driver
- L3DA3W Hi-lume 1% 3-wire LED Driver
- L7EA2W Hi-lume 1% 2-wire LED Driver
- LDE1 Hi-lume 1% -H EcoSystem LED Driver

• LDES 5-Series EcoSystem LED Driver

Approvals: Certified to NRTL safety and IES recommendation testing standards. cULus listed. All components are CSA/QPS recognized or listed, RoHS, LM79, LM80 and LM82 compliant.

Environment: Suitable for dry or damp locations.

APPROVALS

Signature

Date

FILE NAME: S6_P_SPEC_SHEET_20180601

570 Southgate Drive, Guelph, Ontario N1G 4P6
Mailing Address: P.O. Box 1779 Guelph, Ontario, N1H 6Z9

1.800.621.6785 | T 519.822.4381 | F 519.822.4589
www.metalumen.com

Metalumen

SPECIFICATION SHEET | PAGE 1

FEATURES



COMMERCIAL // Commercial Lighting - With over 30 years of successful architectural lighting, providing unique concept and installation solutions has become second nature. Metalumen's Start to End Development Process results in unique performance, design and architectural requirements from concept through implementation. Metalumen's Lighting Solutions have been

applied to customer projects requiring: high profile architectural installations; improved energy efficiency; retrofit installations; unique installations. Metalumen can provide top-quality innovative fixtures when and where they are needed and, at the same time, allow the customer to determine their level of involvement in Metalumen's Start to End Development Process.



EDULUMEN // Educational Lighting - Edulumen is a collection of premium luminaires that maximize both the functionality and performance of any educational facility. Based on maximum efficiency, integration of controls and exceptional design, Edulumen will earn high marks for meeting your requirements. Students challenge themselves throughout the day to achieve,

and Metalumen is dedicated to this by creating sustainable environments that foster enhanced educational experiences.





DAMP Suitable for dry or damp locations.



RAIL 6 S6 Family
DLC Approved

For more Metalumen
DLC Approved Products,
visit the [DLC Website](#)


PATTERNS

	Square (G)	Rectangle (G)	U-Shape (U)	L-Shape (L)
Select Pattern				
Pattern Configuration				
Indicate Desired Lengths (ft)	A =	A = B =	A = B = C =	A = B =
Minimum Lengths	4' for all sides		A = 3', B = 4', C = 3'	A = 3', B = 3'


Record drawings will be sent out upon order showing mounting locations.

HANGERS

Aircraft Cable & Cord

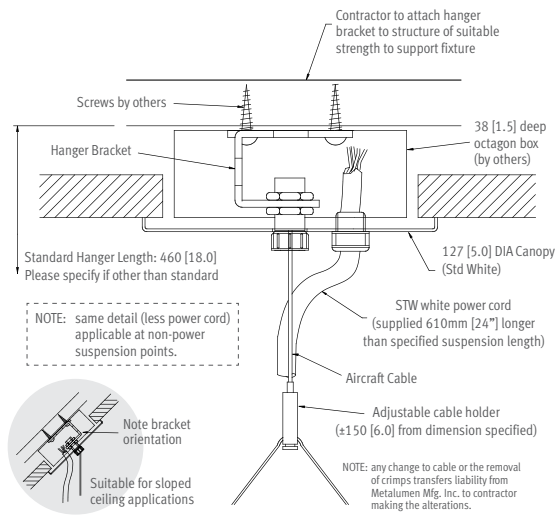

T-Bar Aircraft Cable & Cord

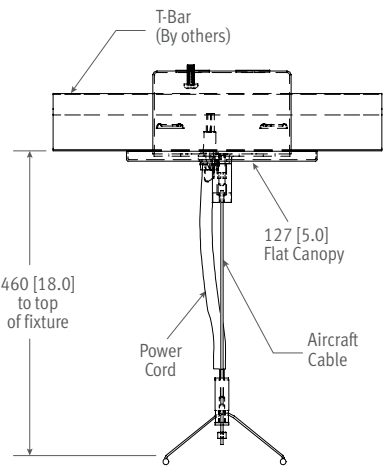

HANGER FINISH

- ☐ White Paint (Standard)
- ☐ Custom Specify RAL#:


Select Hanger Length below:

AIRCRAFT CABLE

Total adjustment range is 6" up & down for each standard length.
All other lengths are considered custom unless otherwise stated.

	IMPERIAL (in)	METRIC (mm)
☐	12	305
☐	18	460
☐	24	610
☐	30	760
☐	36	915
☐	42	1067
☐	48	1220
☐	54	1372
☐	60	1525
☐	72	1830
☐	96	2440
☐	120	3050
☐	144	3660
☐	Custom length:	

MOUNTING - ROW CONFIGURATIONS

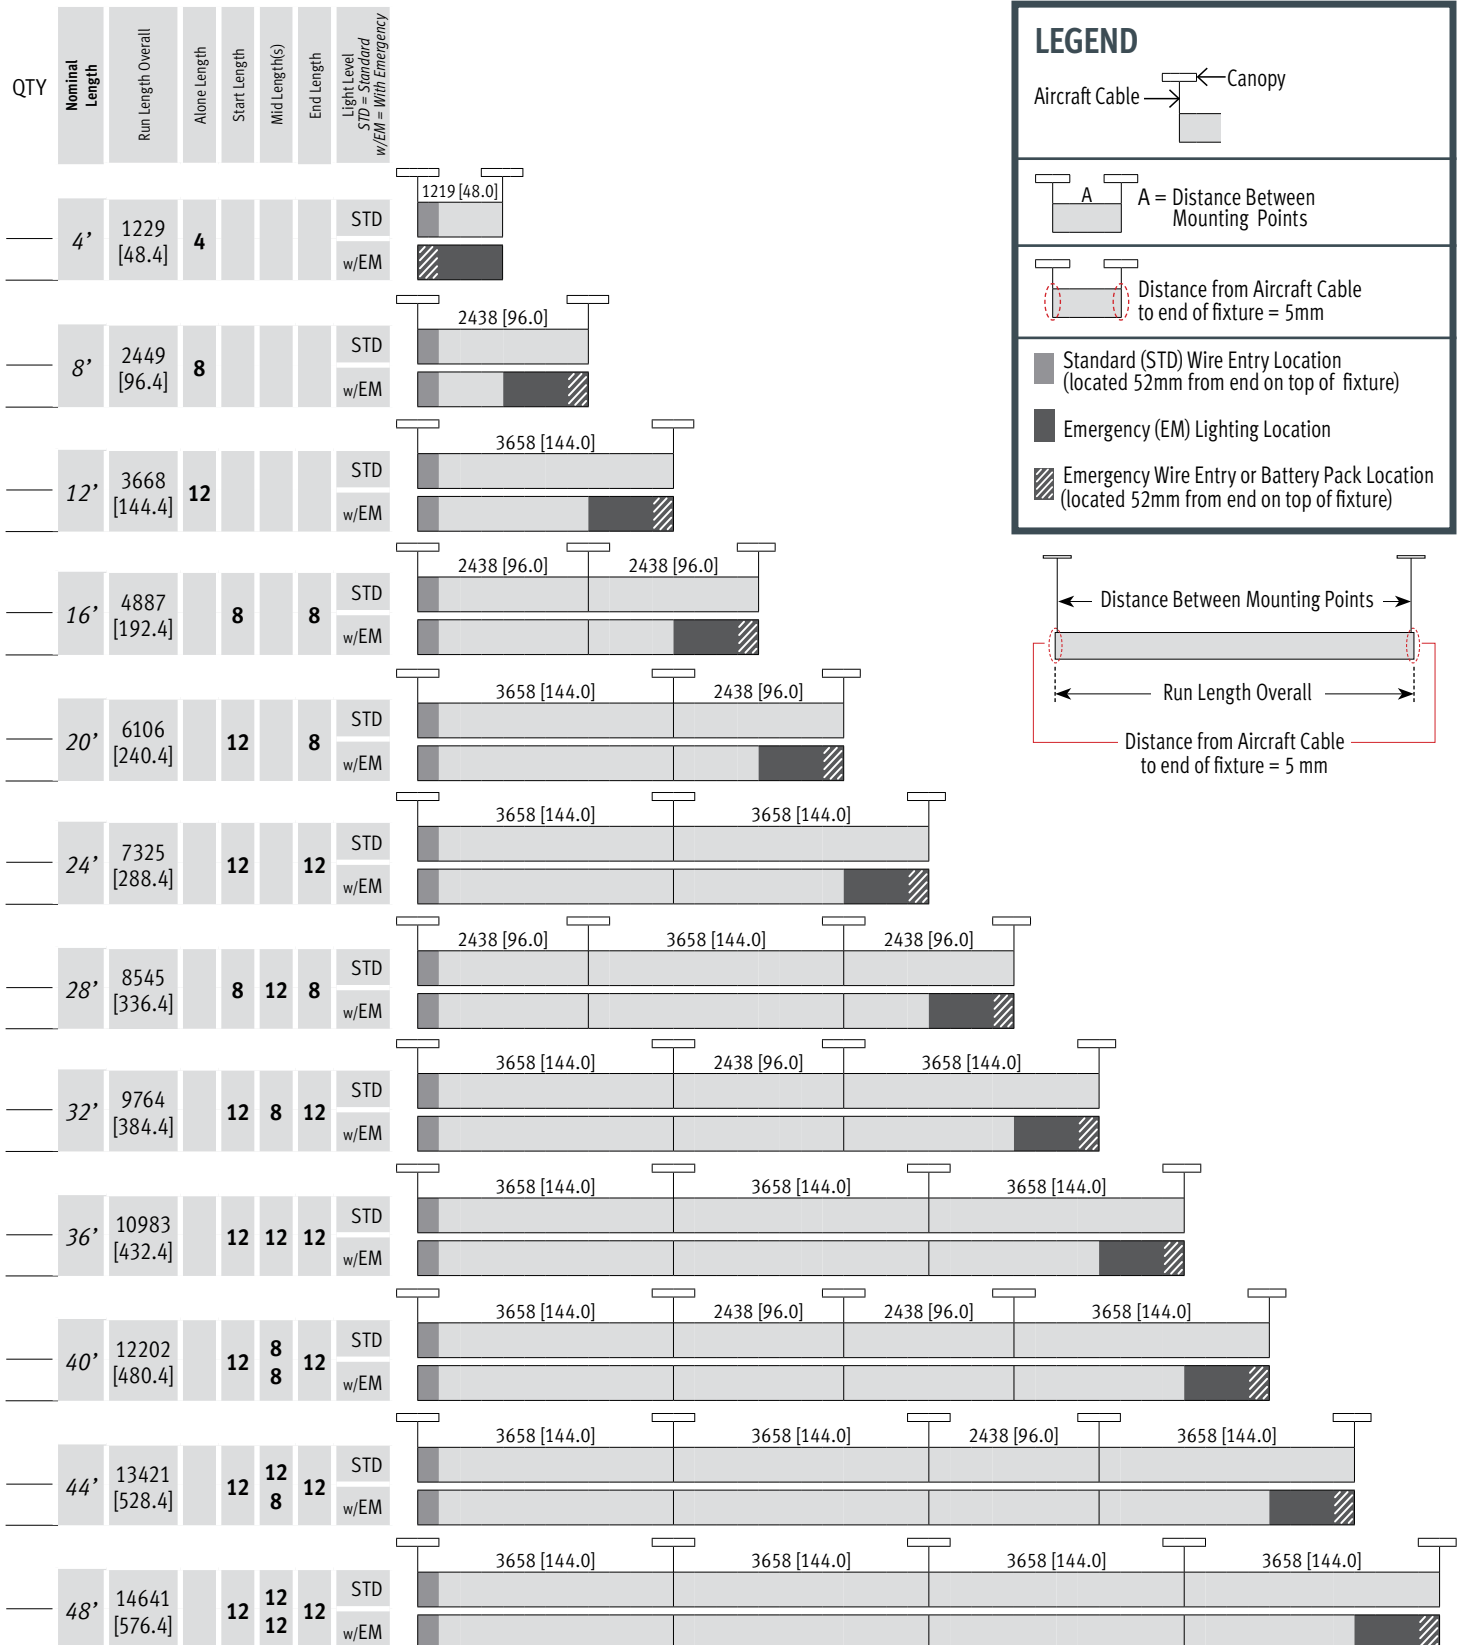

FILE NAME: S6_P_SPEC_SHEET_20180601

PHOTOMETRIC DATA - 3500K - L3

Meta Blanc

File Name: S6-1L35K-4-MB-L3

Luminaire Lumens: 2435

Total Watts: 24.2


Efficacy: 101 lms/W

COEFFICIENTS OF UTILIZATION

Zonal Cavity Method | Effective Floor Cavity Reflectance = .20

RC	80				70				50			
RW	70	50	30	10	70	50	30	10	70	50	30	10
RCR												
0	119	119	119	119	116	116	116	116	111	111	111	111
1	110	106	102	98	107	103	100	97	99	96	94	94
2	101	93	87	82	98	91	86	81	88	83	79	79
3	93	83	75	69	90	81	74	69	78	72	68	68
4	85	74	66	60	83	73	65	59	70	64	59	59
5	79	67	58	52	77	66	58	52	64	57	51	51
6	73	61	52	46	71	60	52	46	58	51	45	45
7	68	55	47	41	66	54	47	41	53	46	41	41
8	64	51	43	37	62	50	42	37	49	42	37	37
9	60	47	39	34	58	46	39	33	45	38	33	33
10	56	43	36	31	55	43	35	31	42	35	30	30

PHOTOMETRIC CURVE



LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angle		
	0	45	90
45	4443	2684	2224
55	3665	1899	1520
65	2843	1223	937
75	1889	623	454
85	733	153	113

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1128.98	1128.98	1128.98	1128.98	1128.98
5	1115.81	1104.53	1137.92	1101.96	1118.38
10	1089.44	1088.08	1095.13	1088.71	1066.99
15	1048.49	1042.42	1037.6	1035	1037.64
20	997.4	990.93	982.9	974.04	977
25	937.71	929.21	914.03	900.04	889.19
30	874.03	859.77	834.43	811.73	806.19
35	785.53	775.18	749.12	720.87	707.12
40	699.56	692.68	652.76	625.15	620.55
45	610.4	596.68	566.6	525.29	520.33
50	520.58	502.71	465.37	439.2	431.41
55	425.19	416.21	382.53	354.58	346.39
60	339.58	330.66	302.17	275.02	272.7
65	258.96	248.26	227.05	208.46	201.37
70	185.3	176.26	161.94	144.98	142.11
75	119.78	114.16	102.22	94.27	88.71
80	63.06	60.21	53.44	50.22	48.25
85	24.79	23.06	21.02	20.01	19.18
90	6.05	5.38	4.76	5.61	5.35

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-20	398.56	16.40
0-30	819.17	33.60
0-40	1286.98	52.80
0-60	2067.21	84.90
0-80	2407.16	98.80
0-90	2435.28	100.00
10-90	2329.65	95.70
20-40	888.43	36.50
20-50	1323.53	54.30
40-70	1008.36	41.40
60-80	339.95	14.00
70-80	111.82	4.60
80-90	28.12	1.20
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	2435.28	100.00

Meta Ice

File Name: S6-1L35K-4-M-L3

Luminaire Lumens: 2850

Total Watts: 24


Efficacy: 118 lms/W

COEFFICIENTS OF UTILIZATION

Zonal Cavity Method | Effective Floor Cavity Reflectance = .20

RC	80				70				50			
RW	70	50	30	10	70	50	30	10	70	50	30	10
RCR												
0	101	101	101	101	99	99	99	99	94	94	94	94
1	93	90	86	84	91	88	85	82	84	82	80	80
2	86	79	74	70	84	78	73	69	75	71	67	67
3	79	71	64	59	77	69	63	59	67	62	58	58
4	73	63	56	51	71	62	56	51	60	54	50	50
5	67	57	50	44	65	56	49	44	54	48	44	44
6	62	52	44	39	61	51	44	39	49	43	39	39
7	58	47	40	35	56	46	40	35	45	39	35	35
8	54	43	36	32	53	43	36	31	41	36	31	31
9	51	40	33	29	50	39	33	29	38	32	28	28
10	48	37	30	26	47	36	30	26	36	30	26	26

PHOTOMETRIC CURVE



LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angle		
	0	45	90
45	5198	3134	2581
55	4347	2212	1751
65	3365	1427	1090
75	2172	730	518
85	839	175	137

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angle			
	0	30	60	90
0	1322.81	1322.81	1322.81	1322.81
5	1336.31	1316.14	1318.16	1310.24
10	1274.36	1288.29	1278.81	1276.54
15	1240.44	1222.49	1225.81	1221.28
20	1181.26	1159.12	1149.92	1141.46
25	1099.07	1092.99	1062.96	1055.19
30	1027.54	1002.89	968.3	950.02
35	927.73	900.76	861.03	827.29
40	824.4	798.29	739.54	715.72
45	714.17	692.26	631.04	603.97
50	602.18	579.78	521.68	497.59
55	504.3	468.79	422.14	399.02
60	402.82	374.31	327.2	314.76
65	306.52	281.33	248.38	234.29
70	216.3	199.09	173.28	165.55
75	137.76	128.38	111.18	101.1
80	73.5	67.31	58.82	54.19
85	28.37	25.48	22.68	23.31
90	7.12	5.51	5.92	7.26

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-20	469.73	16.50
0-30	965.33	33.80
0-40	1515.31	53.10
0-60	2426.99	85.00
0-80	2822.14	98.90
0-90	2854.5	100.00
10-90	2729.9	95.60
20-40	1045.58	36.60
20-50	1555.12	54.50
40-70	1177.51	41.30
60-80	395.15	13.80
70-80	129.32	4.50
80-90	32.36	1.10
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	2854.5	100.00

Drop Lens

File Name: S6-1L35K-4-MD-L3

Luminaire Lumens: 2567

Total Watts: 24.2


Efficacy: 106 lms/W

COEFFICIENTS OF UTILIZATION

Zonal Cavity Method | Effective Floor Cavity Reflectance = .20

RC	80				70				50			
RW	70	50	30	10	70	50	30	10	70	50	30	10
RCR												
0	118	118	118	118	115	115	115	115	108	108	108	108
1	108	103	99	95	105	100	97	93	95	92	89	89
2	98	91	84	78	95	88	82	77	84	79	75	75
3	90	80	72	66	87	78	71	65	74	68	63	63
4	83	71	63	56	80	70	62	56	67	60	55	55
5	77	64	55	49	74	63	55	49	60	53	48	48
6	71	58	49	43	69	57	49	43	55	47	42	42
7	66	53	44	38	64	52	44	38	50	43	38	38
8	61	48	40	35	60	47	40	34	46	39	34	34
9	58	45	37	31	56	44	36	31	42	35	31	31
10	54	41	34	28	53	41	33	28	39	33	28	28

PHOTOMETRIC CURVE



LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angle		
	0	45	90
45	4727	2541	2053
55	3960	1850	1474
65	3237	1244	1015
75	2558	752	618
85	1832	387	342

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1072.82	1072.82	1072.82	1072.82	1072.82
5	1031.17	1060.43	1040.43	1054.15	1072.75
10	1041.9	1024.45	1024.72	1025.21	1008.06
15	1002.76	988.14	979.2	957.7	971.65
20	955.19	946.34	926.06	914.44	895.72
25	901.25	886.29	860.82	835.52	830.01
30	828.4	810.95	784.4	758.11	738.42
35	751.07	743.99	699.72	670.22	664.86
40	675.7	654.66	619.24	585.55	572.4
45	596.85	571.98	538.58	505.16	492.07
50	507.05	489.67	460.4	432.34	418.54
55	424.05	414.92	381.89	360.94	351.39
60	348.27	340.36	310.98	293.99	292.4
65	274.04	268.37	242.06	239.48	233.43
70	211.08	200.02	185.79	181.33	180.87
75	152.59	136.2	133.01	134.6	132.67
80	103.84	85.45	89.81	93.66	94.32
85	60.14	47.51	59.46	65.75	65.83
90	20.59	26.93	40.33	48.22	50.84