


Rail 6 S6

LED . Recessed T-Bar Flanged . TechZone



CAT #:
PREP BY:
DATE:
PROJECT:
TYPE:
NOTES:

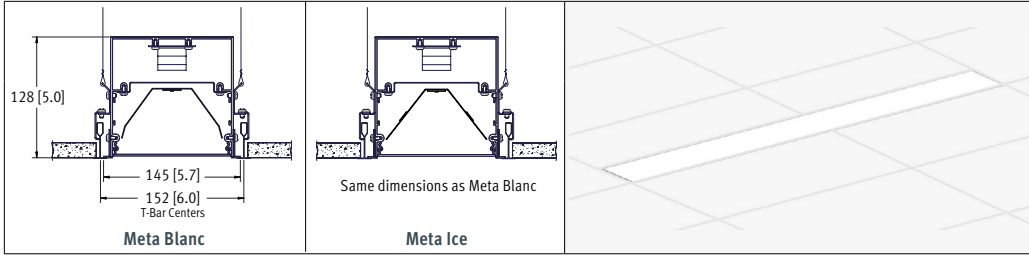

ORDERING LOGIC

Example Part Number: S6-1L35K-8-MB-W-L31-T-1-D-90

S6				Optics				T																																						
Series	Color Temp	Length	Pattern	Up	Down	Finish	LL/Driver	Circuitry	Mounting	Voltage	Controls	Options																																		
Color Temp		Optics Up		Light Level (LL) / Driver		Circuitry		Controls																																						
1L30K = 3000K	90 CRI is available under Options	None (leave space empty)		Performance at 3500K 0-10V Dimming (Standard) Integral Driver <table border="1"> <thead> <tr> <th>Optics</th> <th>Light Level</th> <th>Lumens Delivered</th> <th>Wattage</th> <th>Efficacy (lm/W)</th> </tr> </thead> <tbody> <tr> <td rowspan="4">MB</td> <td>L1</td> <td>1479</td> <td>13.8</td> <td>107</td> </tr> <tr> <td>L2</td> <td>1824</td> <td>17.6</td> <td>104</td> </tr> <tr> <td>L3</td> <td>2435</td> <td>24.2</td> <td>101</td> </tr> <tr> <td>L4</td> <td>4483</td> <td>49.9</td> <td>90</td> </tr> <tr> <td rowspan="4">M</td> <td>L1</td> <td>1730</td> <td>13.8</td> <td>125</td> </tr> <tr> <td>L2</td> <td>2133</td> <td>17.6</td> <td>121</td> </tr> <tr> <td>L3</td> <td>2850</td> <td>24.2</td> <td>118</td> </tr> <tr> <td>L4</td> <td>5248</td> <td>49.8</td> <td>105</td> </tr> </tbody> </table> Based on 4ft sections.		Optics	Light Level	Lumens Delivered	Wattage	Efficacy (lm/W)	MB	L1	1479	13.8	107	L2	1824	17.6	104	L3	2435	24.2	101	L4	4483	49.9	90	M	L1	1730	13.8	125	L2	2133	17.6	121	L3	2850	24.2	118	L4	5248	49.8	105	1 = 1 Circuit	None (leave space empty)
Optics		Light Level	Lumens Delivered			Wattage	Efficacy (lm/W)																																							
MB		L1	1479			13.8	107																																							
		L2	1824			17.6	104																																							
	L3	2435	24.2	101																																										
	L4	4483	49.9	90																																										
M	L1	1730	13.8	125																																										
	L2	2133	17.6	121																																										
	L3	2850	24.2	118																																										
	L4	5248	49.8	105																																										
1L35K = 3500K	Optics Down		EM = Emergency / Night Light		D = Daylight Sensor																																									
1L40K = 4000K	MB = Meta Blanc (Opal Diffuse)		B = Battery Pack		O = Occupancy Sensor																																									
1LTUN = 2-White Tunable (2700 - 6500K)	M = Meta Ice (High Output Semi-Diffuse)		Mounting		DO = Daylight/Occupancy Sensor																																									
Length		Pattern		Finish		Options																																								
2 = 2 ft	8 = 8 ft	G = Square / Rectangle		SA = Satin Aluminum		T = Recessed T-Bar TechZone Compatible †																																								
3 = 3 ft	9 = 9 ft	U = U-Shape		W = White		Voltage																																								
4 = 4 ft	10 = 10 ft	L = L-Shape		C = Custom Finish Specify RAL#:		1 = 120 V																																								
5 = 5 ft	11 = 11 ft	C = Custom Pattern*				2 = 277 V																																								
6 = 6 ft	12 = 12 ft	Enter pattern dimensions on p.2				3 = 347 V																																								
7 = 7 ft						4 = UNV (120 - 277 V)																																								
R = Continuous Rows (See p.3)																																														
C = Custom Length (Consult factory)		None (leave space empty)																																												
None (leave space empty)																																														

* Consult factory for custom patterns, including X and T patterns. | † Optimized to fit 15/16" T-bar. Will fit most 9/16" T-bars.

SPECIFICATIONS

Due to the Continuous Improvement Policy at Metalumen, we reserve the right to change our specifications without notice.

Housing: Rigid extruded aluminum body, 2.0mm (0.08") nominal wall thickness, and steel formed end caps.

Optical System: Metalumen luminaires are designed to utilize leading edge LED technology combined with luminaire optimized reflectors and our custom diffusers, resulting in industry leading optical performance.

CRI: 83+ for 3500K, 80 minimum for all CCTs in standard configurations.

Lumen Maintenance: Minimum 50,000h with TM-21 lumen maintenance of 85% @ 25°C ambient temperature (calculated based on IESNA LM-80-08 LED test data). L70: ≥ 60 000hrs.

Finish: Satin aluminum and white are standard finishes. For custom finish, contact factory.

Weight: 1.7 kg/300mm [3.8 lb/ft]

Mounting: Optimized to fit 15/16" t-bar. Will fit most 9/16" t-bars. TechZone compatible.

Electrical: Factory prewired with easy wire quick connect sections.

Drivers: Metalumen offers dimming drivers as a standard on our entire LED product offering at 0-10V. Dimming range is 10%-100%. Power factor is > 90%. Class 2 rating. Drivers are integral.

Lutron Driver Options: Consult factory for Lutron LED driver options:

LHE H-Series Hi-lume 1% EcoSystem

LA2 A-Series Hi-lume 1% 2-wire

L5E 5-Series EcoSystem 5-Series

Controls: Refer to Ordering Logic chart above.

Approvals: Certified to NRTL safety and IES recommendation testing standards. cULus listed. All components are CSA/QPS recognized or listed, RoHS, LM79, LM80 and LM82 compliant.

Environment: Suitable for dry or damp locations.

APPROVALS Signature _____

Date _____

FILE NAME: S6_T_SPEC_SHEET_20190806

570 Southgate Drive, Guelph, Ontario N1G 4P6
Mailing Address: P.O. Box 1779 Guelph, Ontario, N1H 6Z9

1.800.621.6785 | T 519.822.4381 | F 519.822.4589
www.metalumen.com

Metalumen

WARRANTY

Metalumen will warrant defective luminaires for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specification. If defective, Metalumen will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Metalumen.


FEATURES

Commercial Lighting - With over 30 years of successful architectural lighting, providing unique concept and installation solutions has become second nature. Metalumen's Start to End Development Process results in unique performance, design and architectural requirements from concept through implementation. Metalumen's Lighting Solutions have been applied to customer

projects requiring: high profile architectural installations; improved energy efficiency; retrofit installations; unique installations. Metalumen can provide top-quality innovative fixtures when and where they are needed and, at the same time, allow the customer to determine their level of involvement in Metalumen's Start to End Development Process.





Educational Lighting
Edulumen is a collection of premium luminaires that maximize both the functionality and performance of any educational facility. Based on maximum efficiency, integration of controls and exceptional design, Edulumen will earn high marks for meeting your requirements. Students challenge themselves throughout the day to achieve, and Metalumen is

dedicated to this by creating sustainable environments that foster enhanced educational experiences.

 Suitable for dry or damp locations.

	<p>RAIL 6 S6 Family DLC Approved</p> <p>Applicable only to Meta Ice Optics</p>	<p>For more Metalumen DLC Approved Products, visit the DLC Website</p>
---	---	--

PATTERNS

	Square (G)	Rectangle (G)	U-Shape (U)	L-Shape (L)
Select Pattern				
Pattern Configuration				
Indicate Desired Lengths (ft)	A =	A = B =	A = B = C =	A = B =
Minimum Lengths	4' for all sides		A = 3', B = 4', C = 3'	A = 3', B = 3'

Record drawings will be sent out upon order showing mounting locations.

MOUNTING - ROW CONFIGURATIONS

QTY	Nominal Length	Run Length Overall	Alone Length	Start Length	Mid Length(s)	End Length	Light Level STD = Standard w/EM = With Emergency	
	4'	For 4' T-Bar Centers	4				STD	
							w/EM	
	8'	For 8' T-Bar Centers	8				STD	
							w/EM	
	12'	For 12' T-Bar Centers	12				STD	
							w/EM	
	16'	For 16' T-Bar Centers	8		8		STD	
							w/EM	
	20'	For 20' T-Bar Centers	12		8		STD	
							w/EM	
	24'	For 24' T-Bar Centers	12		12		STD	
							w/EM	
	28'	For 28' T-Bar Centers	8	12	8		STD	
							w/EM	
	32'	For 32' T-Bar Centers	12	8	12		STD	
							w/EM	
	36'	For 36' T-Bar Centers	12	12	12		STD	
							w/EM	
	40'	For 40' T-Bar Centers	12	8	12		STD	
							w/EM	
	44'	For 44' T-Bar Centers	12	12	12		STD	
							w/EM	
	48'	For 48' T-Bar Centers	12	12	12		STD	
							w/EM	

LEGEND

- Standard (STD) Wire Entry Location (located on the end cap)
- Emergency (EM) Lighting Location
- Emergency Wire Entry Location (located on the end cap)

PHOTOMETRIC DATA - 3500K - L3

Meta Blanc


File Name: S6-1L35K-4-MB-L3
 Luminaire Lumens: 2435
 Total Watts: 24.2
 Efficacy: 101 lm/W

COEFFICIENTS OF UTILIZATION

Zonal Cavity Method | Effective Floor Cavity Reflectance = .20

RC RW	80				70				50			
	70	50	30	10	70	50	30	10	70	50	30	10
RCR												
0	119	119	119	119	116	116	116	116	111	111	111	111
1	110	106	102	98	107	103	100	97	99	96	94	94
2	101	93	87	82	98	91	86	81	88	83	79	79
3	93	83	75	69	90	81	74	69	78	72	68	68
4	85	74	66	60	83	73	65	59	70	64	59	59
5	79	67	58	52	77	66	58	52	64	57	51	51
6	73	61	52	46	71	60	52	46	58	51	45	45
7	68	55	47	41	66	54	47	41	53	46	41	41
8	64	51	43	37	62	50	42	37	49	42	37	37
9	60	47	39	34	58	46	39	33	45	38	33	33
10	56	43	36	31	55	43	35	31	42	35	30	30

PHOTOMETRIC CURVE



LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angle		
	0	45	90
45	4443	2684	2224
55	3665	1899	1520
65	2843	1223	937
75	1889	623	454
85	733	153	113

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1128.98	1128.98	1128.98	1128.98	1128.98
5	1115.81	1104.53	1137.92	1101.96	1118.38
10	1089.44	1088.08	1095.13	1088.71	1066.99
15	1048.49	1042.42	1037.6	1035	1037.64
20	997.4	990.93	982.9	974.04	977
25	937.71	929.21	914.03	900.04	889.19
30	874.03	859.77	834.43	811.73	806.19
35	785.53	775.18	749.12	720.87	707.12
40	699.56	692.68	652.76	625.15	620.55
45	610.4	596.68	566.6	525.29	520.33
50	520.58	502.71	465.37	439.2	431.41
55	425.19	416.21	382.53	354.58	346.39
60	339.58	330.66	302.17	275.02	272.7
65	258.96	248.26	227.05	208.46	201.37
70	185.3	176.26	161.94	144.98	142.11
75	119.78	114.16	102.22	94.27	88.71
80	63.06	60.21	53.44	50.22	48.25
85	24.79	23.06	21.02	20.01	19.18
90	6.05	5.38	4.76	5.61	5.35

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-20	398.56	16.40
0-30	819.17	33.60
0-40	1286.98	52.80
0-60	2067.21	84.90
0-80	2407.16	98.80
0-90	2435.28	100.00
10-90	2329.65	95.70
20-40	888.43	36.50
20-50	1323.53	54.30
40-70	1008.36	41.40
60-80	339.95	14.00
70-80	111.82	4.60
80-90	28.12	1.20
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	2435.28	100.00

Meta Ice


File Name: S6-1L35K-4-M-L3
 Luminaire Lumens: 2850
 Total Watts: 24
 Efficacy: 118 lm/W

COEFFICIENTS OF UTILIZATION

Zonal Cavity Method | Effective Floor Cavity Reflectance = .20

RC RW	80				70				50			
	70	50	30	10	70	50	30	10	70	50	30	10
RCR												
0	101	101	101	101	99	99	99	99	94	94	94	94
1	93	90	86	84	91	88	85	82	84	82	80	80
2	86	79	74	70	84	78	73	69	75	71	67	67
3	79	71	64	59	77	69	63	59	67	62	58	58
4	73	63	56	51	71	62	56	51	60	54	50	50
5	67	57	50	44	65	56	49	44	54	48	44	44
6	62	52	44	39	61	51	44	39	49	43	39	39
7	58	47	40	35	56	46	40	35	45	39	35	35
8	54	43	36	32	53	43	36	31	41	36	31	31
9	51	40	33	29	50	39	33	29	38	32	28	28
10	48	37	30	26	47	36	30	26	36	30	26	26

PHOTOMETRIC CURVE



LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angle		
	0	45	90
45	5198	3134	2581
55	4347	2212	1751
65	3365	1427	1090
75	2172	730	518
85	839	175	137

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angle			
	0	30	60	90
0	1322.81	1322.81	1322.81	1322.81
5	1336.31	1316.14	1318.16	1310.24
10	1274.36	1288.29	1278.81	1276.54
15	1240.44	1222.49	1225.81	1221.28
20	1181.26	1159.12	1149.92	1141.46
25	1099.07	1092.99	1062.96	1055.19
30	1027.54	1002.89	968.3	950.02
35	927.73	900.76	861.03	827.29
40	824.4	798.29	739.54	715.72
45	714.17	692.26	631.04	603.97
50	602.18	579.78	521.68	497.59
55	504.3	468.79	422.14	399.02
60	402.82	374.31	327.2	314.76
65	306.52	281.33	248.38	234.29
70	216.3	199.09	173.28	165.55
75	137.76	128.38	111.18	101.1
80	73.5	67.31	58.82	54.19
85	28.37	25.48	22.68	23.31
90	7.12	5.51	5.92	7.26

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-20	469.73	16.50
0-30	965.33	33.80
0-40	1515.31	53.10
0-60	2426.99	85.00
0-80	2822.14	98.90
0-90	2854.5	100.00
10-90	2729.9	95.60
20-40	1045.58	36.60
20-50	1555.12	54.50
40-70	1177.51	41.30
60-80	395.15	13.80
70-80	129.32	4.50
80-90	32.36	1.10
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	2854.5	100.00