





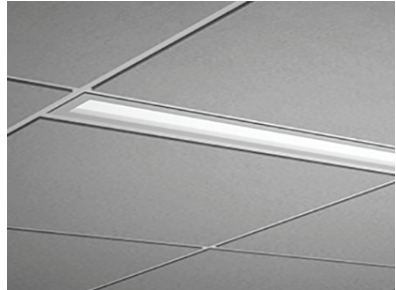


Competitor Feature Cross Reference

Brand		Metalumen	LumenWerx	FluxWerx	Peerless (Acuity)
Product Name		DR25	CAVA	PROFILE	OPEN
Product Image					
General Characteristics	Cross section Dimensions (width X Height)	4.5" X 4.3"	4.5" X 4.5"	3.25" X 3.10" Surface-Recessed (Not True Recessed)	4.5" X 4.5"
	Standard Lengths	2', 4', 8' & Continuous row (2' nominal increments)	2', 3', 4', 5', 8' & 12' sections \$& Cont. runs	4', 8' & Continuous row (4' nominal increments)	2', 3', 4', 5', 6' and 8' sections
Lighting Characteristics	CRI	83+	80	80	80
	CCT	3000K, 3500K, 4000K	3000K, 3500K, 4000K	3500K & 4000K	3000K, 3500K, 4000K
	Lumen Package based on 4' section	@3500K: 2423, 3084, 4432, 8478	@4000K: 1401, 2002, 3004	@4000K: 2600, 3000	Up to 3000 lumens
	Input Watts	28, 35, 48, 97	13, 19, 29	39, 49	Not Available
	Efficacy (LPW)	Up to 91	Up to 107	Up to 67	Up to 97
	Dimming	0-10V Standard, DALI & Lutron optional	0-10V, Lutron	0-10V, Lutron	Yes
	Driver Mounting	Remote	Integral	Remote	Remote
	Rated Life	L85 > 60,000h	L80 > 60,000h	L90 @ 60,000h	Not Available
Warranty	5 Years	5 Years	5 Years	5 Years	
Features	Integral Sensors	YES	YES	NO	NO
	Integral Battery	NO	NO	NO	NO

Competitor Feature Cross Reference

Brand		Metalumen	FluxWerx	Peerless (Acuity)
Product Name		DP25	PROFILE	OPEN
Product Image				
General Characteristics	Cross section Dimensions (width X Height)	4.5" X 4.3"	3.25" X 3.10" Surface-Recessed (Not True Recessed)	4.5" X 4.5"
	Standard Lengths	2', 4', 8' & Continuous row	4', 8' & Continuous row (4' nominal increments)	2', 3', 4', 5', 6' and 8' sections
Lighting Characteristics	CRI	83+	80	80
	CCT	3000K, 3500K, 4000K	3500K & 4000K	3000K, 3500K, 4000K
	Lumen Package	@3500K: 1267, 1613, 2316, 4433	@4000K: 1600, 1900	Up to 3000 lumens
	Input Watts	14, 18, 24, 48	24, 29	Not Available
	Efficacy (LPW)	Up to 95	Up to 66	Up to 97
	Dimming	0-10V Standard, DALI & Lutron optional	0-10V, Lutron	Yes
	Driver Mounting	Remote	Remote	Remote
	Rated Life	L85 > 60,000h	L90 @ 60,000h	Not Available
Warranty	5 Years	5 Years	5 Years	
Features	Integral Sensors	YES	NO	NO
	Integral Battery	NO	NO	NO