





DR25



DP25



DR25 & DP25 LED



Metalumen Architectural Commercial Lighting just got rid of the lens barrier – Great efficiency with the new recessed offering.

Metalumen is pleased to announce the launch of its first lens-free luminaire in the recessed ambient and recessed wall-wash application. The DR25 & DP25 are completely designed optically and aesthetically with innovation and accuracy in mind. Simple elegance that is architecturally breath-taking.

This revolutionary new LED luminaire characterizes the ultimate in simplicity and design by providing clean, uniform, floating line of illumination in any architectural environment. Optical accuracy and design perfected to complement almost any décor in any environment. These 2.3" aperture lens-free luminaires will look astonishing in any high-end Office environment, Library, Retail, Classroom or health facility with outstanding lumen output that sets a new standard in efficacy of open luminaires. Changing from Fluorescent to LED is no longer the approach; with this fixture it is difficult not to upgrade your current LED system for better efficiency. With the DR25 & DP25 series, there is no reason you cannot meet and exceed outstanding energy conservation and savings for your application.

Standard Features

- Lens-Free Fixture Design
- No lens = Higher efficacy
- Fully concealed source
- Batwing distribution pattern for optimal spacing and wall washing
- Quick disconnect wiring for easy maintenance.
- 3 Macadam Ellipses binning.
- Brightness Control – No glare
- Controls compatible with 0-10V dimming, Lutron, and DALI protocol.
- Energy Efficient
- 4 different light levels
- Direct or direct/indirect
- 2, 4, 8ft & Continuous runs
- 3000k, 3500K & 4000K CCT & Tunable White option
- LM79 & LM80 compliant
- L85 @ 60,000h by IESNA TM-21 (L70@ 168,000h)
- UL/CSA
- Suitable for dry locations only
- DLC pending qualifications



4' DR25 Lens-free Luminaire

Light Level	Wattage	Lumens Delivered	Efficacy (LPW)	Fluorescent Equivalent	Energy Savings*
		DR25	DR25		
L1	28	2423	87	1T8/1T5	29%
L2	35	3086	87	2T8/2T5	43%
L3	48	4431	92	1T5HO	20%
L4	97	8482	87	2T5HO	19%

* Energy Savings based upon standard lamp/ballast combination using an equivalent high efficient FL system

4' DP25 Lens-free Luminaire

Light Level	Wattage	Lumens Delivered	Efficacy (LPW)	Fluorescent Equivalent	Energy Savings*
		DP25	DP25		
L1	14	1267	91	1T8	64%
L2	17	1613	93	1T8/1T5	55%
L3	24	2316	97	2T5/1T5HO	61%
L4	48	4434	92	2T5HO	60%

* Energy Savings based upon standard lamp/ballast combination using an equivalent high efficient FL system

Up to 60%
Energy Savings

Marketing Collateral

For your convenience our website has been updated with new marketing material including a brochure, specification sheet and photometric files.

View the [DR25](#) and [DP25](#).

In addition, a competitive analysis, FAQ Sheet and a PowerPoint presentation is posted to the agent portal to assist with your sales efforts. [Click here](#) to download these tools.






NPI Webcast

A New Product introduction webcast will be held to review the great features and benefits. An invitation will be sent out.

Pricing and Commission

Contact our quotations team for pricing on your latest project opportunity.

Thank you for your continued support.

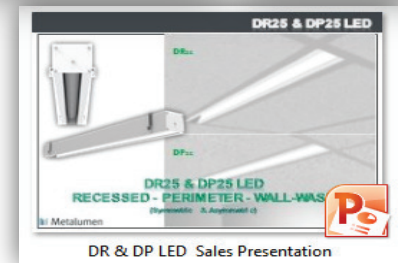

Miraflor Romero
Marketing Communications Coordinator

John Bouls
Strategic Marketing & NPD Manager