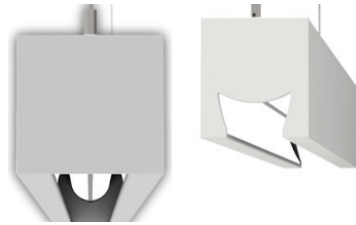





Competitor Feature Cross Reference

| Brand | | Metalumen | LumenWerx | FluxWerx | Peerless (Acuity) |
|--------------------------|---|---|---|---|---|
| Product Name | | MEGA: M4P & M4S | CAVA | PROFILE | OPEN |
| Product Image | |  |  |  |  |
| General Characteristics | Cross section Dimensions (width X Height) | 4.3" X 4.3" | 4.5" X 4.5" | 3.25" X 3.10" | 4.5" X 4.5" |
| | Standard Lengths | 2', 4', 8' & Continuous row (2' nominal increments) | 2', 3', 4', 5', 8' & 12' sections & Cont. runs | 4', 8' & Continuous row (4' nominal increments) | 2', 3', 4', 5', 6' and 8' sections |
| Lighting Characteristics | CRI | 83+ | 80 | 80 | 80 |
| | CCT | 3000K, 3500K, 4000K | 3000K, 3500K, 4000K | 3500K & 4000K | 3000K, 3500K, 4000K |
| | Lumen Package based on 4' section Direct ONLY | 2437, 3101, 4457, 8523 | 1401, 2002, 3004 | 2600, 3000 | Up to 3000 lumens |
| | Input Watts | 28, 35, 48, 97 | 13, 19, 29 | 39, 49 | Not Available |
| | Efficacy (LPW) Including D/I | Up to 105 | Up to 107 | Up to 67 | Up to 97 |
| | Dimming | 0-10V Standard, DALI & Lutron optional | 0-10V, Lutron | 0-10V, Lutron | Yes |
| | Driver Mounting | Integral & Remote | Integral | Remote | Remote |
| | Rated Life | L90 > 60,000h | L80 > 60,000h | L90 @ 60,000h | Not Available |
| Warranty | 5 Years | 5 Years | 5 Years | 5 Years | |
| Features | Integral Sensors | YES | YES | NO | NO |
| | Integral Battery | NO | NO | NO | NO |