

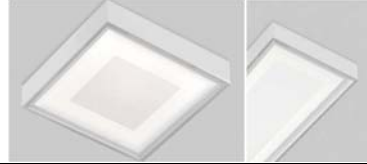




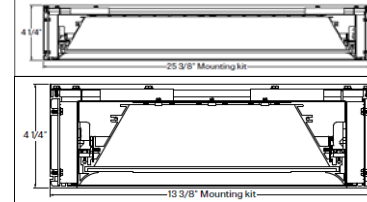




Competitor Feature Cross Reference

Brand		Metalumen	Corelite	LumenWerx	FluxWerx	AXIS
Product Name		SCENE	Divide	PRIMO	Transform	Skyview
Product Image						
General Characteristics	Cross section Dimensions					
	Mounting & Standard Lengths	Recessed, Pendant and Surface (Horizontal & Vertical) 2X2, 1X4, Continuous & Staggered mounting	Recessed, Pendant, Wall and Surface 2X2, 2X4, 1X4, Continuous	Recessed & Surface 2X2 & 1X4	Recessed	Recessed
Lighting Characteristics	CRI	85	82	80 or 90	86	80 or 90
	CCT	3000K, 3500K, 4000K, 5000K & 2-white Tun. (2700-6500)	3000K, 3500K, 4000K	3000K, 3500K, 4000K	3500K, 4000K	3000K, 3500K, 4000K
	Lumen Package @ 3500K	2X2: 2227, 3185, 3581, 4090 1X4: 2037, 4068, 5814, 6522	2X2: 2249, 2650, 3215, 4171, 5427 1X4: 3154, 3950, 5300, 6700, 8200	2X2: 2000, 3200, 4200, 5000 1X4: 2000, 3200, 4200, 5000	2X2: 2395, 2980, 3640 1X4: 2410, 3030, 3790	2X2: 2290, 3200, 4500 (4000K) 1X4: 2400, 3205, 4508 (4000K)
	Input Watts	2X2: 24W, 37W, 43W, 51W 1X4: 21W, 48W, 73W, 85W	2X2: 24W, 28W, 34W, 46W, 60W 1X4: 32W, 45W, 57W, 74W, 94W	2X2: 20W, 33W, 45W, 54W 1X4: 20W, 34W, 46W, 56W	2X2: 29W, 38W, 48W 1X4: 29W, 37W, 48W	2X2: 23W, 33W, 48W 1X4: 25W, 35W, 52W
	Efficacy (LPW)	Up to 97 l/w	Up to 98 l/w	Up to 101 l/w	Up to 84 l/w	Up to 99 l/w
	Dimming	0-10V (standard), Lutron, DALI, wireless controls	0-10V (standard), Lutron, DALI	0-10V, Lutron, DALI & Wireless	0-10V, Lutron, DALI	0-10V, Lutron, DALI & Wireless
	Driver Mounting	Integral & Remote	Integral	Integral	Integral	Integral
	Rated Life	L90> 60,000h	L70> 60,000h	L80> 60,000h	L90> 60,000h	L80> 60,000h
Warranty	5 years	5 years	5 years	5 years	5 years	
Features	MRI safe	Yes	No	No	No	No
	Custom pattern & graphics	Yes	No	Yes (two options)	No	No