

NOTES:

1. Installation should be completed by an individual familiar with the construction and operation of the luminaire.
2. Installation of luminaire must be in accordance with nation and local building and electrical codes.
3. Carefully read and follow all warnings and instructions before installing or servicing the luminaire.
4. Instructions do not cover all details and all possible product configurations
5. Do not restrict luminaire ventilation.
6. Ensure LED luminaire is not covered with material that will prevent convection or conduction cooling.
7. Do not exceed luminaire's maximum ambient temperature.
8. Ensure LED luminaire has the correct polarity before installation.
9. Based on maximum voltage restrictions for class 2 circuits in Canadian Electrical Code, the output cannot be accessible. This product has accessible output terminals. This product complies with this requirement since the installation instruction requires installation in Restricted Access Area.

WARNINGS:

Electric shock

- Disconnect or turn off power before installing or servicing luminaire.
- All electrical wiring to be completed by a qualified licensed electrician in accordance with local and National/Canadian Electrical Code.
- Ensure supply voltage corresponds with the correct ballast/driver voltage.
- Avoid exposing wiring to metal edges and sharp objects.
- Ensure that the luminaire is properly grounded to prevent electric hazards.

Fire

- Keep flammable and combustible materials away from the light source and/or lens.
- Use correctly rated supply conductors as indicated by product labeling.

Burn

- Allow luminaire to cool before handling luminaire.

Personal Injury


- Wear safety glasses and gloves when handling the luminaire to avoid physical injury.
- Avoid direct eye contact with light source
- Always support the weight of the luminaire.

Specifications and design subject to change without notice.

PARTS LIST

MAIN PARTS

- A. Luminaire enclosure
- B. Diffuser / Lens
- C. Swing style mounting brackets
- D. Gasket (not shown)

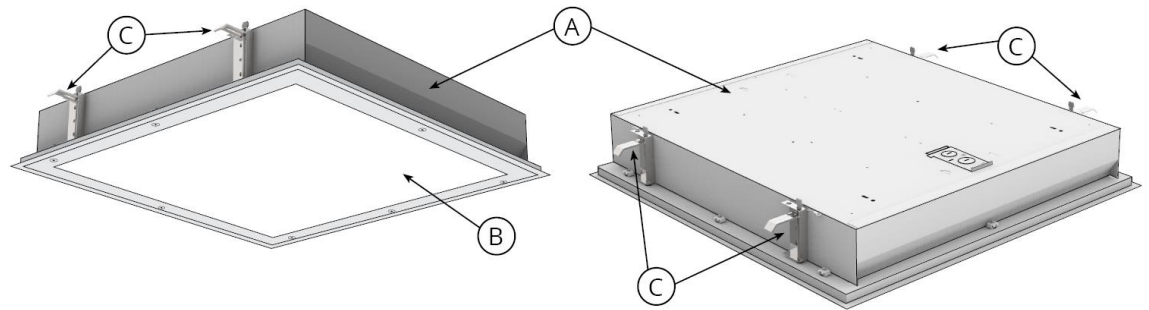

REQUIRED TOOLS

- Phillips screwdriver

WIRING

All electrical wiring is to be completed by a qualified licensed electrician in accordance with local and National/Canadian Electrical Code.

Specifications and design subject to change without notice.


STEP-BY-STEP INSTRUCTIONS

STEP 1.

Remove fixture and all supplied parts from packaging. Fixture is shipped with universal mounting system pre-installed.

See **STEP 2** for **T-Bar**.
See **STEP 3** for **Drywall**.

CAUTION: When peeling the film from gasket, do not stretch gasket while applying to avoid retraction. Gasket is included and must be applied by installer.

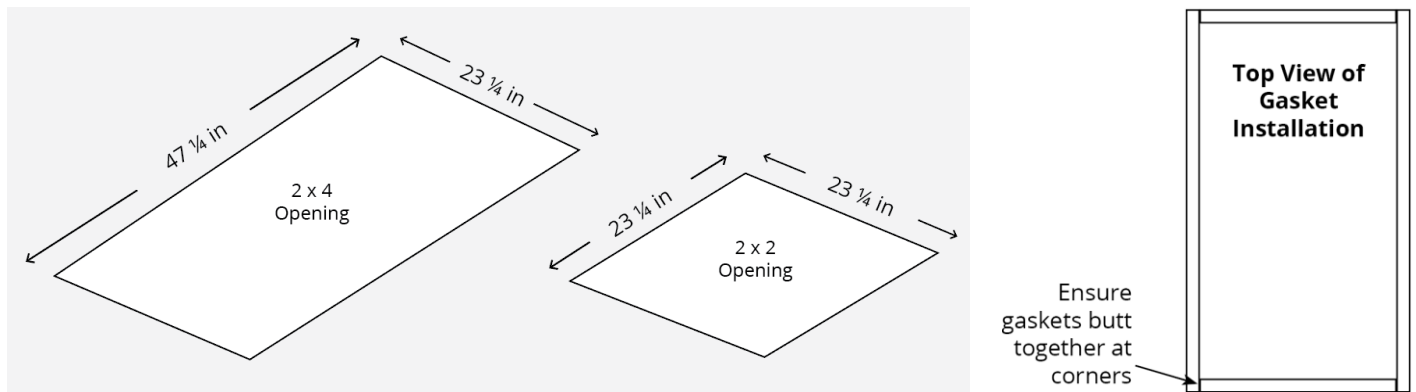

T-BAR INSTALLATION & GASKET LOCATION



STEP 2. Align gasket with edge of flange. Ensure gaskets butt together at corners.

Specifications and design subject to change without notice.

DRYWALL INSTALLATION & GASKET LOCATION



STEP 3. Align gasket with inside edges. Ensure gaskets butt together at corners.

MAINTENANCE

REQUIRED TOOLS:

- Plastic/latex gloves
- Clean, dry, lint-free cloth

Important: Use clean gloves to avoid adding oil/dirt to reflector surface. Avoid scratching reflector surface by using installation tools with soft plastic rounded edges.

To clean the lens:

Gently wipe down the lens with a clean, dry cloth to remove any dust and light residues. For heavier smudges, use a clean, damp, lint-free cloth to wipe lens.

WARNING:

Hard wiping and abrasive cloths will scratch the optics. DO NOT USE cleaning products containing alcohol or acetone which will damage the optics.

Specifications and design subject to change without notice.