




- 5 YEAR**
WARRANTY
- c.  **UL** **US**
LISTED
E360886
-  **IP54**
-  **WET**
-  **IK10**
- LUMA**
OPTICS




PART #:		
PREP BY:		DATE:
PROJECT:		QTY:
NOTES:		
APPROVAL SIGNATURE:		DATE (DD/MM/YYYY):

PERFORMANCE SUMMARY @ 3500K		Meta Blanc MB	Luma Span LS	Luma Asym LA	Luma Graze LG	Polycarb PC
		Light Level 50				
Lumens per foot	80 CRI	574	522	525	767	585
	90 CRI	502	457	459	671	512
Wattage per foot		5.7	4.7	4.4	5.7	5.8
Efficacy	80 CRI	100	112	118	134	102
	90 CRI	88	97	104	118	88
L70 Estimate (h)		≥ 60,000 hrs				

OTHER RAIL WET SERIES PRODUCTS



Example Part Number: S4WD-35K-8-MB-NW-1001-SS18-3-OO-90

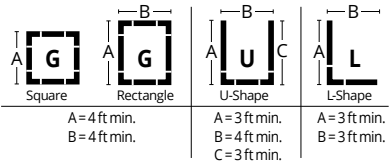S4WD								SS					
1	2	3	4	5	6	7	8	9	10	11	12		
1. SERIES S4WD Direct		2. COLOR TEMP 30K 3000K 35K 3500K 40K 4000K 90 CRI is available under OPTIONS		3. LENGTH 2 2 ft 3 3 ft 4 4 ft 5 5 ft 6 6 ft 7 7 ft 8 8 ft 9 9 ft 10 10 ft 11 11 ft 12 12 ft RA Continuous Rows (Replace "A" with length in feet) C Custom Length*		4. PATTERN ¹ GA Square GAxB Rectangle UAxBxC U-Shape LAxB L-Shape C Custom Pattern* — None (leave space empty) Standard Patterns Minimum Lengths  Custom Patterns*  Select corner: <input type="checkbox"/> Outside 90° <input type="checkbox"/> Inside 90° 				5. OPTICS MB Meta Blanc IK10 PC Polycarbonate IK10 LS Luma Span (Batwing) LA Luma Asymmetric LG Luma Graze MB: Acrylic opal diffuse lens LS, LA: Optical control lens PC: Semi-diffuse lens See Photometric Data on p2		6. FINISH NSA Satin Aluminum NW White NB Black NC Custom Specify RAL:	
7. LIGHT LEVEL / DRIVER 35 350 lm/f 75 750 lm/f 50 500 lm/f 100 1000 lm/f C Custom Range. Specify lumens: (Total lumens between 350-1000 at 50 lm intervals) Select Driver on next page. See Light Level Performance chart on p2.				8. CIRCUITRY 1 1 Circuit EM Emergency / Night Light B Emergency Battery Pack* (remote mounted) (Limited to ambient temperatures down to 0°C)		9. MOUNTING SSA Solid Stem <i>Not suitable for installation in areas exposed to wind loading</i> Replace "A" with length in inches selected on next page. Select Solid Stem Length, Canopy Finish & Power Cord Color below		10. VOLTAGE 1 120 V 2 277 V 3 347 V 4 UNV (120 - 277V)		11. CONTROLS OO Outdoor Occupancy Sensor DD Outdoor Dusk to Dawn Sensor — None (leave space empty)		12. OPTIONS 90 90 CRI, High R9 — None (leave space empty)	

Select Driver: ☐ **FD** Factory option 0-10V, 1% Dimming
☐ **LHE** Lutron H-Series Hi-lume 1% EcoSystem LED Driver
☐ **L5E** Lutron 5-Series EcoSystem LED Driver
 Consult factory for -40 drivers.

Select Solid Stem Length - 1/2 OD Standard:

Standard supplied length is 18" (460mm). Hangers will be supplied at closest length. All other lengths are considered custom unless otherwise stated. **If no selection is made, 48" will be supplied.**

Select:	Imperial (in)	Metric (mm)	Select:	Imperial (in)	Metric (mm)	Select:	Imperial (in)	Metric (mm)
<input type="checkbox"/>	12	305	<input type="checkbox"/>	27	685	<input type="checkbox"/>	42	1067
<input type="checkbox"/>	15	380	<input type="checkbox"/>	30	760	<input type="checkbox"/>	45	1145
<input type="checkbox"/>	18	460	<input type="checkbox"/>	33	840	<input type="checkbox"/>	48	1220
<input type="checkbox"/>	21	533	<input type="checkbox"/>	36	915	<input type="checkbox"/> Custom Length: _____		
<input type="checkbox"/>	24	610	<input type="checkbox"/>	39	990			

Select Canopy Finish & Power Cord Color

Canopy

☐ White

☐ Custom Finish

☐ Black

RAL: _____

Power Cord

☐ White

☐ Black

LIGHT LEVEL PERFORMANCE & PHOTOMETRIC DATA


3000K, 85 CRI, 0-10V Dimming (Standard)

		Meta Blanc (MB)			Polycarbonate (PC)			Luma Asymmetric (LA)			Luma Graze (LG)		
Light Level		Lumens per foot	Wattage per foot	Efficacy (LPW)	Lumens per foot	Wattage per foot	Efficacy (LPW)	Lumens per foot	Wattage per foot	Efficacy (LPW)	Lumens per foot	Wattage per foot	Efficacy (LPW)
35		381	3.9	99	388	3.9	101	364	3.0	122	450	3.3	137
50		574	5.7	100	585	5.8	102	525	4.4	118	565	4.3	133
75		790	8.1	97	807	8.1	99	772	6.4	121	767	5.7	134
100		1090	11.8	93	1115	11.7	95	1016	8.8	116	1457	11.7	125
Light Level 75	IES File	S4WD-35K-4-MB-75			S4WD-35K-4-PC-75			S4WD-35K-4-LA-75			S4WD-35K-4-LG-75		
	Distribution % (Down / Up)	100 / 0			100 / 0			100 / 0			100 / 0		
	Zonal Lumens (0-90 / 90-180)	3156 / 0			3227 / 0			3088 / 0			3067 / 0		
	Distribution Curve												
Metalumen's light level performance metrics are subject to manufacturers component tolerances.													


Lumen Adjustment Factor (Standard)

Color Temp	80 CRI	90 CRI
3000K	0.984	0.880
3500K	1.000	0.875
4000K	1.032	0.879

CROSS SECTIONS

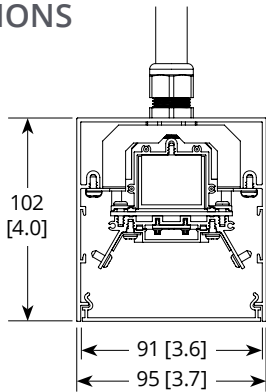


WIRING

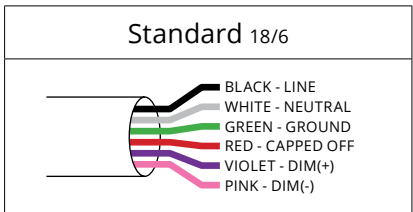

HANGER

Aircraft Cable & Cord

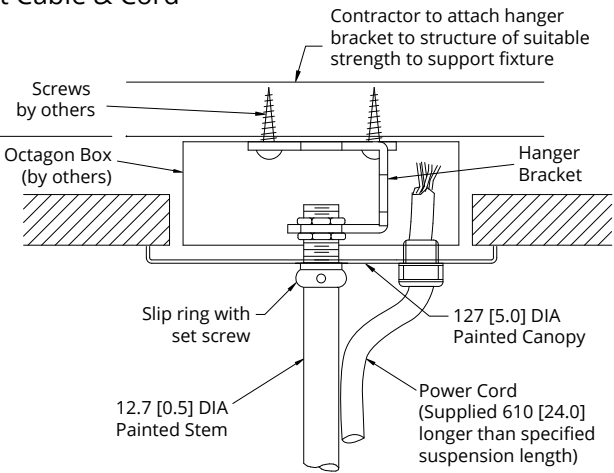

SPECIFICATIONS

Due to the Continuous Improvement Policy at Metalumen, we reserve the right to change our specifications without notice.

<p>Housing: Rigid extruded aluminum body, 2.0mm (0.08”) nominal wall thickness. Aluminum formed end caps.</p> <p>Optical System: Metalumen luminaires are designed to utilize leading edge LED technology combined with luminaire optimized reflectors and our custom diffusers, resulting in industry leading optical performance.</p> <p>CRI: 83+ for 3500K, 80 minimum for all CCTs in standard configurations.</p>	<p>Lumen Maintenance: Minimum 50,000h with TM-21 lumen maintenance of 85% @ 25°C ambient temperature (calculated based on IESNA LM-80-08 LED test data). L70: ≥ 60 000hrs.</p> <p>Finish: Standard natatorium powder coated finish in satin aluminum, white and black. Exceeds 4000 salt spray hours (ASTM B117). For custom colors, contact factory.</p> <p>Weight: 3 lb/ft</p>	<p>Mounting: Stainless steel solid stem with a powder coat paint finish. Not suitable for installation in areas exposed to wind loading.</p> <p>Drivers: Metalumen offers dimming* drivers as a standard on our entire LED product offering at 0-10V. Dimming range is 1%-100%. Power factor is > 90%. Class 2 rating. Drivers are integral. Consult factory for -40 drivers.</p> <p>Approvals: All components are UL/</p>	<p>CSA/QPS recognized or listed. RoHS compliant. This product is cULus listed.</p> <p>Environment: Suitable for wet locations -22°F / -30°C start ambient temperature. Suitable for natatorium environments.</p> <p><i>*Standard drivers compatible with passive/sinking dimmers. Please contact Metalumen if active/sourcing dimmer support is required.</i></p>
---	---	--	--

WARRANTY

Metalumen will warrant defective luminaires for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specification. If defective, Metalumen will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Metalumen.