



# Rail 6 S6 (Formerly Sequence)

LED . Surface

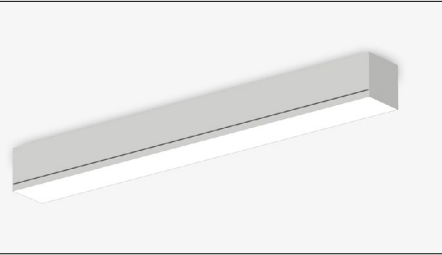

DLC Applicable only to Meta Ice Optics

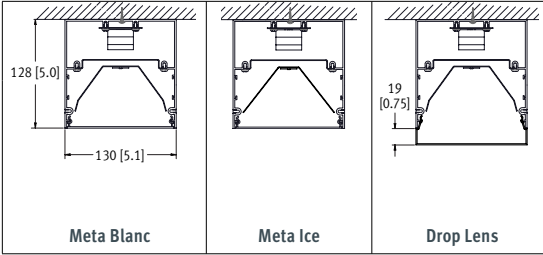

CAT #:
PREP BY:
DATE:
PROJECT:
TYPE:
NOTES:

## ORDERING LOGIC

Example Part Number: S6-1L35K-8-M-W-L31-S-1-D-90

S6				Optics						S																																																													
Series	Color Temp	Length	Pattern	Up	Down	Finish	LL/Driver	Circuitry	Mounting	Voltage	Controls	Options																																																											
<b>Color Temp</b>		<b>Optics Up</b>		<b>Light Level (LL) / Driver</b>				<b>Circuitry</b>		<b>Controls</b>																																																													
1L30K = 3000K		90 CRI is available under Options		None (leave space empty)				<b>Performance at 3500K 0-10V Dimming (Standard)</b> <table border="1"> <thead> <tr> <th>Optics</th> <th>Light Level</th> <th>Lumens Delivered</th> <th>Wattage</th> <th>Efficacy (LPW)</th> </tr> </thead> <tbody> <tr> <td rowspan="4">MB</td> <td>L1</td> <td>1479</td> <td>13.8</td> <td>107</td> </tr> <tr> <td>L2</td> <td>1824</td> <td>17.6</td> <td>104</td> </tr> <tr> <td>L3</td> <td>2435</td> <td>24.2</td> <td>101</td> </tr> <tr> <td>L4</td> <td>4483</td> <td>49.9</td> <td>90</td> </tr> <tr> <td rowspan="4">M</td> <td>L1</td> <td>1730</td> <td>13.8</td> <td>125</td> </tr> <tr> <td>L2</td> <td>2133</td> <td>17.6</td> <td>121</td> </tr> <tr> <td>L3</td> <td>2850</td> <td>24.2</td> <td>118</td> </tr> <tr> <td>L4</td> <td>5248</td> <td>49.8</td> <td>105</td> </tr> <tr> <td rowspan="4">MD</td> <td>L1</td> <td>1509</td> <td>14.0</td> <td>108</td> </tr> <tr> <td>L2</td> <td>1888</td> <td>17.7</td> <td>107</td> </tr> <tr> <td>L3</td> <td>2567</td> <td>24.2</td> <td>106</td> </tr> <tr> <td>L4</td> <td>4762</td> <td>49.9</td> <td>95.4</td> </tr> </tbody> </table>		Optics	Light Level	Lumens Delivered	Wattage	Efficacy (LPW)	MB	L1	1479	13.8	107	L2	1824	17.6	104	L3	2435	24.2	101	L4	4483	49.9	90	M	L1	1730	13.8	125	L2	2133	17.6	121	L3	2850	24.2	118	L4	5248	49.8	105	MD	L1	1509	14.0	108	L2	1888	17.7	107	L3	2567	24.2	106	L4	4762	49.9	95.4	1 = 1 Circuit		None (leave space empty)			
Optics	Light Level			Lumens Delivered	Wattage	Efficacy (LPW)																																																																	
MB	L1			1479	13.8	107																																																																	
	L2	1824	17.6	104																																																																			
	L3	2435	24.2	101																																																																			
	L4	4483	49.9	90																																																																			
M	L1	1730	13.8	125																																																																			
	L2	2133	17.6	121																																																																			
	L3	2850	24.2	118																																																																			
	L4	5248	49.8	105																																																																			
MD	L1	1509	14.0	108																																																																			
	L2	1888	17.7	107																																																																			
	L3	2567	24.2	106																																																																			
	L4	4762	49.9	95.4																																																																			
1L35K = 3500K		MB = Meta Blanc (Opal Diffuse)		<b>Optics Down</b>				EM = Emergency / Night Light		D = Daylight Sensor																																																													
1L40K = 4000K		M = Meta Ice (High Output Semi-Diffuse)		SA = Satin Aluminum				B = Battery Pack		O = Occupancy Sensor																																																													
1LTUN = 2-White Tunable (2700 - 6500K)		MD = Drop Lens**		W = White				<b>Mounting</b>		DO = Daylight/Occupancy Sensor																																																													
<b>Length</b>		<b>Pattern</b>		<b>Finish</b>				S = Surface		<b>Options</b>																																																													
2 = 2 ft		G = Square / Rectangle		SA = Satin Aluminum				<b>Voltage</b>		90 = 90 CRI																																																													
3 = 3 ft		U = U-Shape		W = White				1 = 120 V		None (leave space empty)																																																													
4 = 4 ft		L = L-Shape		C = Custom Finish Specify RAL#:				2 = 277 V																																																															
5 = 5 ft		C = Custom Pattern*						3 = 347 V																																																															
6 = 6 ft		Enter pattern dimensions on p.2						4 = UNV (120 - 277 V)																																																															
7 = 7 ft																																																																							
R = Continuous Rows (See p.3)																																																																							
C = Custom Length (Consult factory)		None (leave space empty)																																																																					
None (leave space empty)																																																																							

\* Consult factory for custom patterns, including X and T patterns. | \*\* Drop lens is not available with patterns.

## SPECIFICATIONS

Due to the Continuous Improvement Policy at Metalumen, we reserve the right to change our specifications without notice.

**Housing:** Rigid extruded aluminum body, 2.0mm (0.08") nominal wall thickness, and steel formed end caps.  
**Optical System:** Optical System MetaLED mid flux LED technology transmits to an internal high performance-side kicking reflector that then passes through our Meta Blanc or Meta Ice acrylic diffuser for smooth distribution, creating a continuation of smooth consistent light.  
**CRI:** 83+ for 3500K, 80 minimum for all CCTs

in standard configurations.  
**Lumen Maintenance:** At an ambient operating temperature of 35°C, the LED lifetime expectancy > 60 000hrs at L85.  
**Finish:** Satin aluminum and white are standard finishes. For custom finish, contact factory.  
**Weight:** 1.7 kg/300mm [ 3.8 lb/ft ]  
**Mounting:** Fixture is mounted directly to ceiling.  
**Electrical:** Factory prewired with easy wire

quick connect sections.  
**Drivers:** Metalumen offers dimming drivers as a standard on our entire LED product offering at 0-10V. Dimming is 10%-100% range Power factor is >90% with a Class 2 rating.  
**Lutron Driver Options:** Consult factory for Lutron driver options:  
 • L3DAE Hi-lume 1% EcoSystem LED Driver  
 • L3DA3W Hi-lume 1% 3-wire LED Driver

• LTEA2W Hi-lume 1% 2-wire LED Driver  
 • LDE1 Hi-lume 1% -H EcoSystem LED Driver  
 • LDE5 5-Series EcoSystem LED Driver  
**Controls:** Refer to Ordering Logic chart above.  
**Approvals:** Certified to NRTL safety and IES recommendation testing standards. cULus listed. All components are CSA/QPS recognized or listed, RoHS, LM79, LM80 and LM82 compliant.  
**Environment:** Suitable for dry or damp locations.

APPROVALS Signature \_\_\_\_\_

Date \_\_\_\_\_

FILE NAME: S6\_S\_SPEC\_SHEET\_20180601

570 Southgate Drive, Guelph, Ontario N1G 4P6  
 Mailing Address: P.O. Box 1779 Guelph, Ontario, N1H 6Z9


1.800.621.6785 | T 519.822.4381 | F 519.822.4589  
 www.metalumen.com

Metalumen


## WARRANTY

Metalumen will warrant defective luminaires for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specification. If defective, Metalumen will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Metalumen.


## FEATURES


 **COMMERCIAL // Commercial Lighting** - With over 30 years of successful architectural lighting, providing unique concept and installation solutions has become second nature. Metalumen's Start to End Development Process results in unique performance, design and architectural requirements from concept through implementation. Metalumen's Lighting Solutions have been

applied to customer projects requiring: high profile architectural installations; improved energy efficiency; retrofit installations; unique installations. Metalumen can provide top-quality innovative fixtures when and where they are needed and, at the same time, allow the customer to determine their level of involvement in Metalumen's Start to End Development Process.





 **EDULUMEN // Educational Lighting** - Edulumen is a collection of premium luminaires that maximize both the functionality and performance of any educational facility. Based on maximum efficiency, integration of controls and exceptional design, Edulumen will earn high marks for meeting your requirements. Students challenge themselves throughout the day to achieve,

and Metalumen is dedicated to this by creating sustainable environments that foster enhanced educational experiences.

 **DAMP** Suitable for dry or damp locations.

	<p><b>RAIL 6 S6 Family</b> DLC Approved</p>	<p>For more Metalumen DLC Approved Products, visit the <a href="#">DLC Website</a></p>
---	---	--

## PATTERNS

Select Pattern	Square (G)	Rectangle (G)	U-Shape (U)	L-Shape (L)
Pattern Configuration				
Indicate Desired Lengths (ft)	A =	A = B =	A =      B = C =	A = B =
Minimum Lengths	4' for all sides		A = 3', B = 4', C = 3'	A = 3', B = 3'

Record drawings will be sent out upon order showing mounting locations.

## MOUNTING - ROW CONFIGURATIONS

QTY	Nominal Length	Run Length Overall	Along Length	Start Length	Mid Length(s)	End Length	Light Level STD = Standard w/EM = With Emergency	
	4'	1223 [48.1]	4				STD	
							w/EM	
	8'	2442 [96.1]	8				STD	
							w/EM	
	12'	3662 [144.2]	12				STD	
							w/EM	
	16'	4880 [192.1]	8	8			STD	
							w/EM	
	20'	6100 [240.2]	12	8			STD	
							w/EM	
	24'	7320 [288.2]	12	12			STD	
							w/EM	
	28'	8538 [336.1]	8	12	8		STD	
							w/EM	
	32'	9758 [384.2]	12	8	12		STD	
							w/EM	
	36'	10978 [432.2]	12	12	12		STD	
							w/EM	
	40'	12196 [480.2]	12	8	12		STD	
							w/EM	
	44'	13416 [528.2]	12	12	12		STD	
							w/EM	
	48'	14636 [576.2]	12	12	12		STD	
							w/EM	

**LEGEND**

- Standard (STD) Wire Entry Location (located 52mm from end on top of fixture)
- Emergency (EM) Lighting Location
- Emergency Wire Entry Location (located 52mm from end on top of fixture)

